

RA2 Select In-Line Load Controls

The RA2 Select family of in-line dimmers and switches can control lighting and motor loads both locally and remotely when paired with Pico wireless controls or Radio Powr Savr occupancy/vacancy sensors. This provides a system that is convenient and easy to install.

RA2 Select in-line load controls use Lutron patented Clear Connect RF technology which provides reliable, wireless communication with other RA2 Select devices. Each load control can be controlled individually using a Pico wireless control. Using a RA2 Select main repeater allows devices to be part of a whole house solution that can be controlled remotely from anywhere in the world.



Control Type	Model Number	Frequency	Country/Region
Dimmer	RRK-R25NE-240	868 MHz	UK, Europe
Switch	RRK-R6ANS-240	868 MHz	UK, Europe

Features

- The dimmer is trailing edge capable of 1 W minimum load and up to 250 W of LED, incandescent, halogen, or ELV loads.
- The switch is rated for 6 AX of general purpose lighting load and 2 A 0.5 HP of motor load.
- Allows remote control from anywhere in the space when paired with Pico wireless controls.
- When used with the RA2 Select main repeater, the load controls can be programmed via the Lutron App* to incorporate lighting scenes and schedule daily events. Also, the load controls can also be controlled from anywhere in the world.
- To maximize energy savings and provide hands-free operation, load controls can be turned on/off automatically via Radio Powr Savr occupancy/vacancy sensors.
- Small size allows for simple retrofit installation.
- Remote device association allows for in-line controls to be added to a system without physically accessing product.

* The Lutron app is required for setup and use with the RA2 Select main repeater. The Lutron app is compatible with iOS® devices version 8.0 or later and Android™ devices version 4.0 or later.

RA2 Select In-Line Load Controls


Specifications

Power	220–240 V~ 50/60 Hz
Typical Power Consumption	Dimmer / Switch: < 0.5 W Test conditions: Load and LED are off
Regulatory Approvals	CE
Environment	Ambient operating temperature: 0 °C to 40 °C (32 °F to 104 °F), 0% to 90% humidity, non-condensing. Indoor use only.
Communications	RA2 Select in-line load controls communicate with the system through Radio Frequency (RF). They must be located within 18 m (60 ft) line-of-sight or 9 m (30 ft) through walls of a Pico wireless control, Radio Powr Savr sensor, or RA2 Select repeater. System devices operate on 868 MHz or 868 MHz limited frequencies.
ESD Protection	Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2.
Surge Protection	Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 Recommended Practice for Surge Voltages in Low-Voltage AC Power Circuits.
Power Failure	Power failure memory: should power be interrupted, the control will return to its previously set level prior to the interruption when power is restored.
Mounting	Allow adequate space to ensure convective cooling of load control. Remove any insulation, heat generating equipment, or obstructions within 120 mm (4.75 in) of the load control. For optimal RF performance, no metal or other electrically conductive material should be present within 120 mm (4.7 in) around the top and sides of the load control. The load control is not suitable for installation in places where it is fully enclosed in metal (e.g., metal enclosures, electrical cabinets) or within metal ceilings.
Wiring	RA2 Select in-line controls accept wire gauges between 0.5 mm ² to 2.5 mm ² (20 AWG to 14 AWG). Note: All outside wire diameters must be the same and must be between 5.2 mm–8.5 mm (0.2 in–0.3 in).
Device Limits	Up to 100 devices (e.g., load controls, Pico wireless controls, Radio Powr Savr sensors, shades, and repeaters) are supported per system. The main repeater counts as one device and four locations are reserved for wireless repeaters. Note: Load controls have load type and capacity limits. For more information, see Load Type and Capacity .
Warranty	www.lutron.com/TechnicalDocumentLibrary/Intl_Warranty.pdf

RA2 Select In-Line Load Controls


Dimensions

All dimensions are shown as: mm (in)

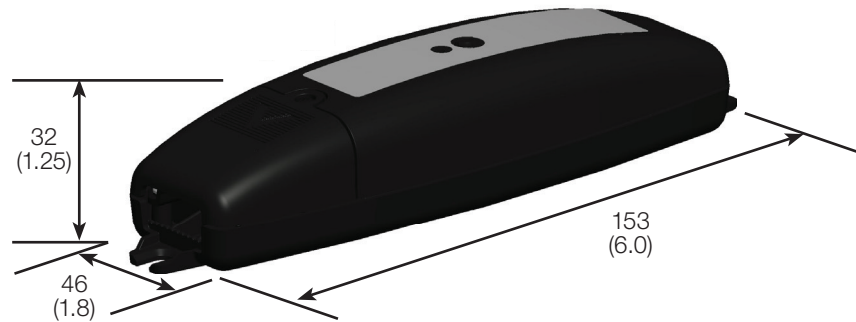





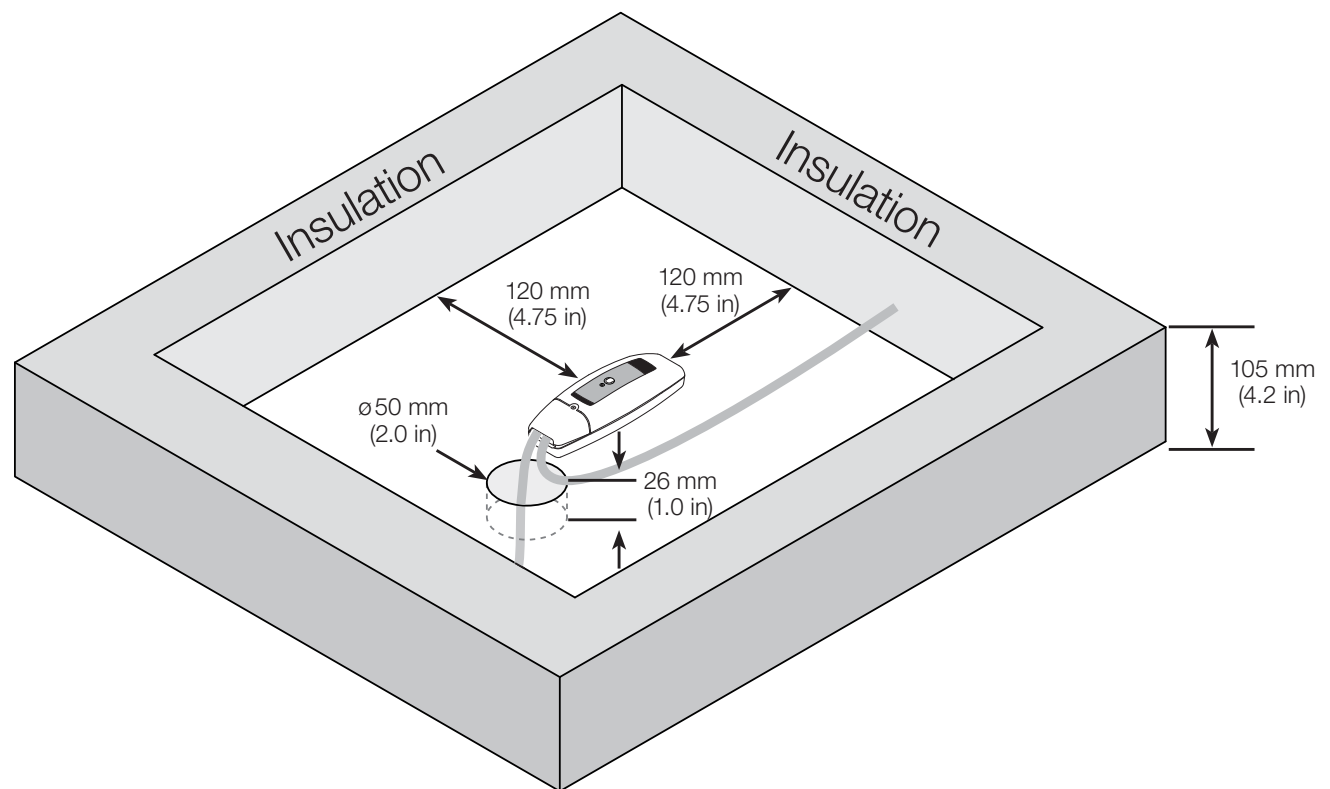




Mounting and Installation

All dimensions are shown as: mm (in)



RA2 Select In-Line Load Controls

Load Type and Capacity

Model	Voltage	Load Types
RRK-R25NE-240	220–240 V~ 50/60 Hz	1 A 250 W – Incandescent, halogen, ELV   1 A 250 W – LED* 
RRK-R6ANS-240		6 AX Lighting (all types)      2 A 0.5 HP Motor 

* LEDs must be Lutron compatible. For more information, see www.lutron.com/LED


Compatible Power Boosters and Load Interfaces

Some local controls can be used to control power boosters or load interfaces. Up to three power boosters or load interfaces can be used with one control. See table below for a list of controls and compatible power boosters and load interfaces.

Control	ELV interface NGRX-ELVI-CE	Power Booster NGRX-PB-CE	0-10 V interface GRX-TVI
RRK-R25NE-240	✓	✓	✓
RRK-R6ANS-240			✓


RA2 Select In-Line Load Controls

Wiring

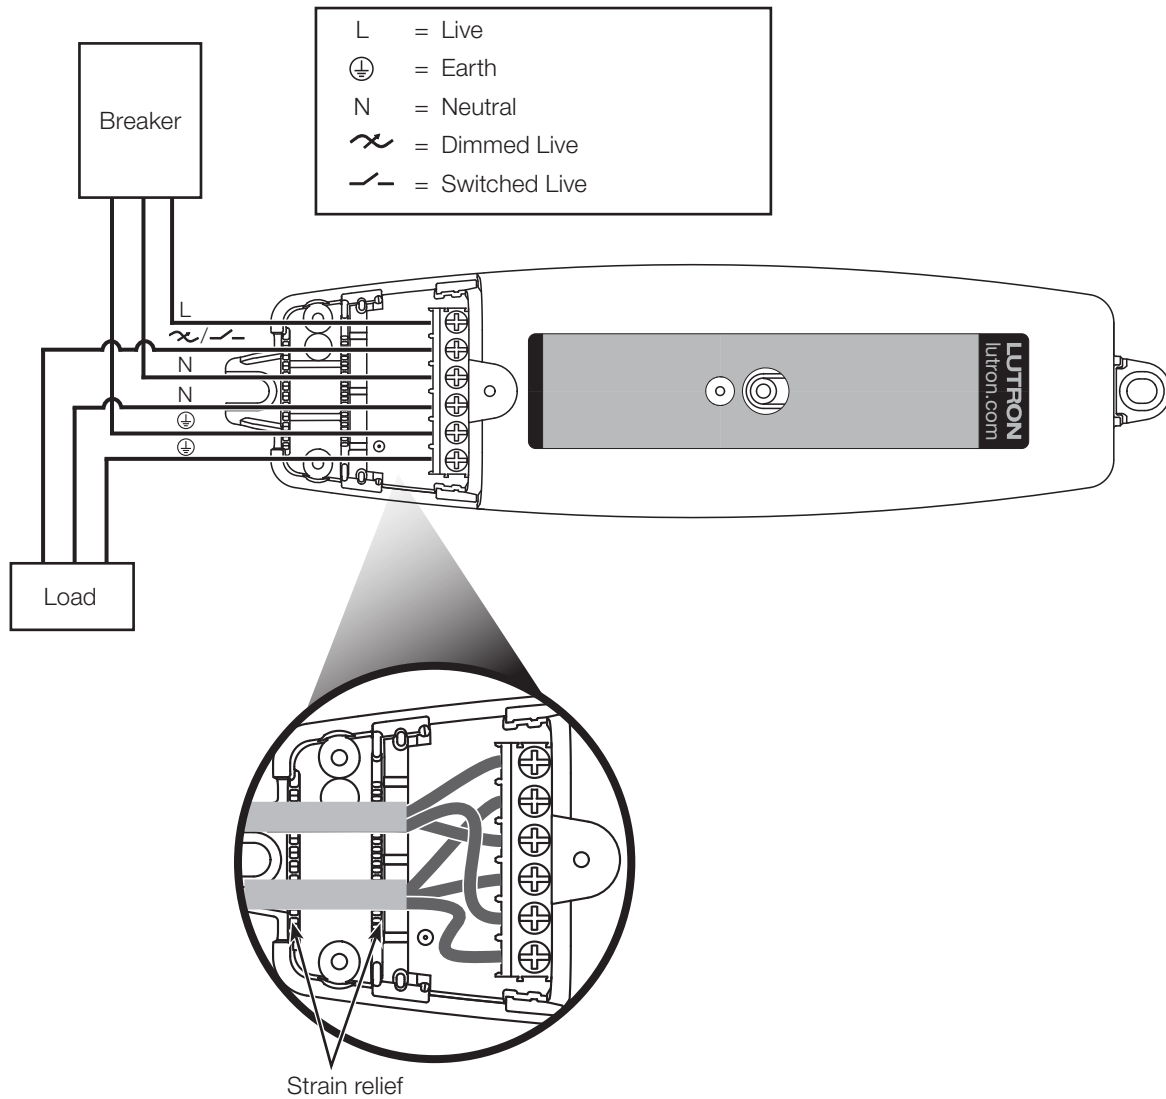


RA2 Select In-Line Load Controls

Operation

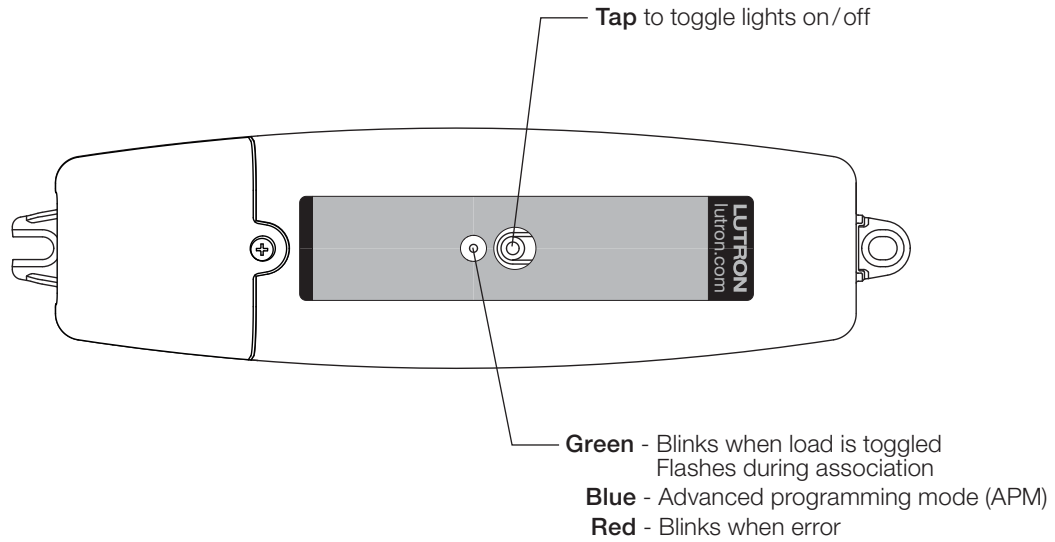

RF Range

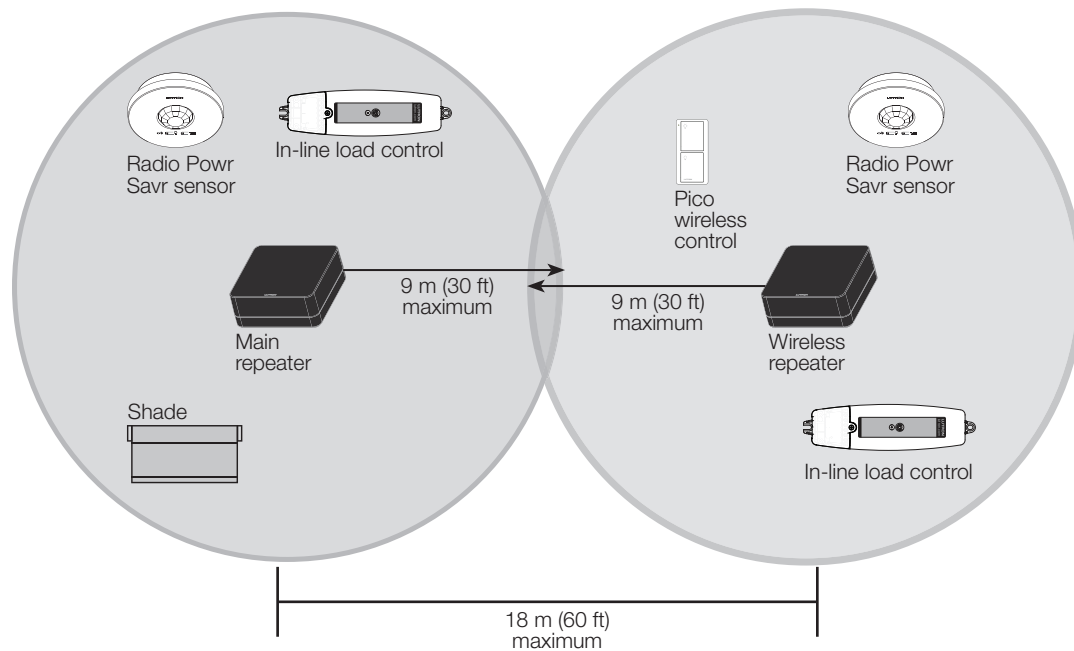


All devices must be located within 9 m (30 ft) of a repeater. The range can be extended with up to four RA2 Select wireless repeaters (LK-REPPRO).

RA2 Select In-Line Load Controls

Model Numbers

RRX-RXXX-240



Frequency/Channel Code

K = 868 MHz

Device Type

6ANS = Switch (Neutral Required)

25NE = Dimmer (Neutral Required)