


SLIMLINE LOW VOLTAGE EMERGENCY PACKS FOR LOW VOLTAGE DICHROIC LAMPS - MAX LOAD 12V 50W

Order Code	Maintained Mode	Duration 50W (20W)	Emergency Brightness	Battery Types	Length (m)	Weight (kg)
SLIM 1/6	No	1.5 (3) hour	Half (6v)	5x NiCd "D" or NiMH "C" Cell	0.6	0.9
SLIM 1/6M	Yes	1.5 (3) hour	Half (6v)	5x NiCd "D" or NiMH "C" Cell	0.6	1.0
SLIM 3/6	No	3 (6) hours	Half (6v)	5x NiMH "D" Cell	0.8	1.5
SLIM 3/6M	Yes	3 (6) hours	Half (6v)	5x NiMH "D" Cell	0.8	1.6
SLIM 3/12	No	3 (6) hours	Full (12v)	9x NiMH "F" Cell	1.4	2.9
SLIM 3/12M	Yes	3 (6) hours	Full (12v)	9x NiMH "F" Cell	1.4	3.0

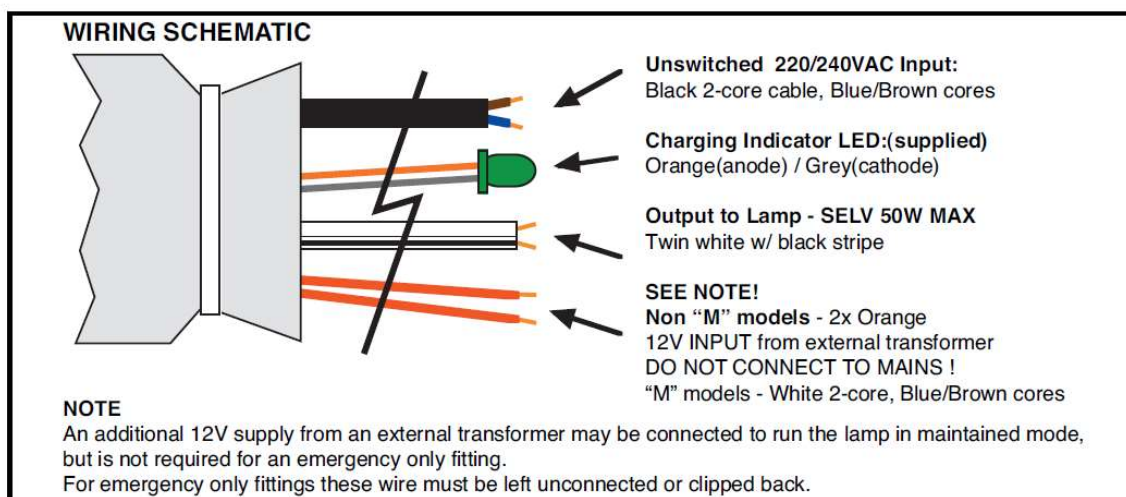

INSTALLATION NOTES

When fitting, avoid cables from touching the rear of dichroic lamps to prevent damage from high temperatures.

On first installation, the SLIM 1/6 models may take 24 hours or more for the batteries to reach full charge. SLIM 3/6 and SLIM 3/12 models may take 2-3 days.
 Operation of all models can be tested after approx 1 hour of charge.

The LED indicator shows that batteries are charging and should be lit at all times except in emergency mode.

The unit contains an internal fuse (5A/T rated) to protect against battery shorting or overload. This fuse is not user serviceable and should only be changed by a qualified technician.