



1

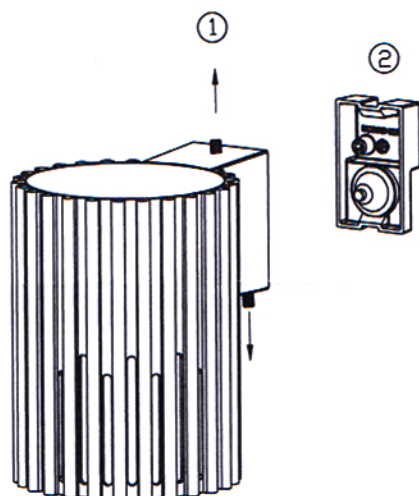


1. Loosen the fastening screw by turning it counterclockwise.
2. Remove the mounting base plate.

2

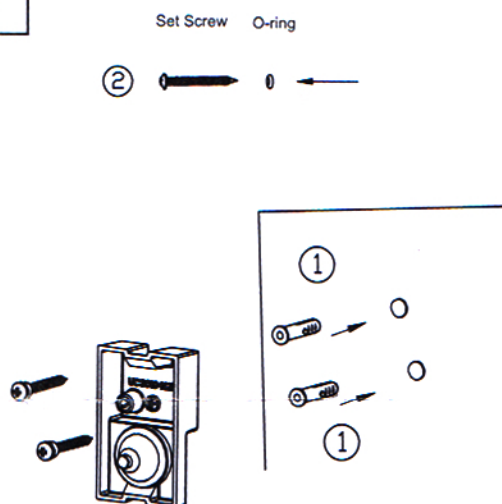


1. Drill holes for the mounting base plate screws in the wall, and insert the plastic wall plugs.
2. Slide the O-ring onto the M4x30 self-tapping screw.
3. Pass the power cable through the waterproof grommet on the base plate, and then secure the base plate with the screws.

3

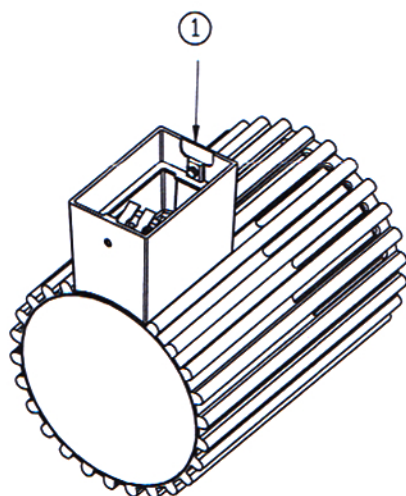


1. Use a power drill or other tool to remove the knockout holes.
(Note: Removal of knockout holes depends on customer requirements.)

4

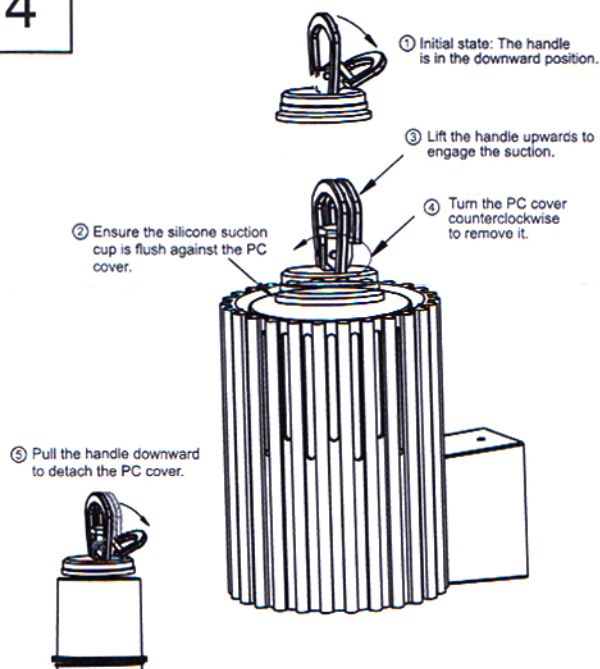


1. Use the suction cup to remove the upper and lower PC covers by turning them counterclockwise.

5

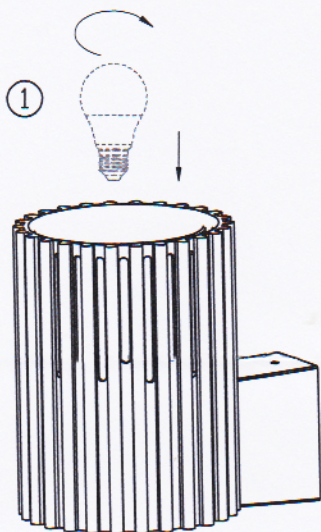


1. Screw in the desired bulb clockwise.

6

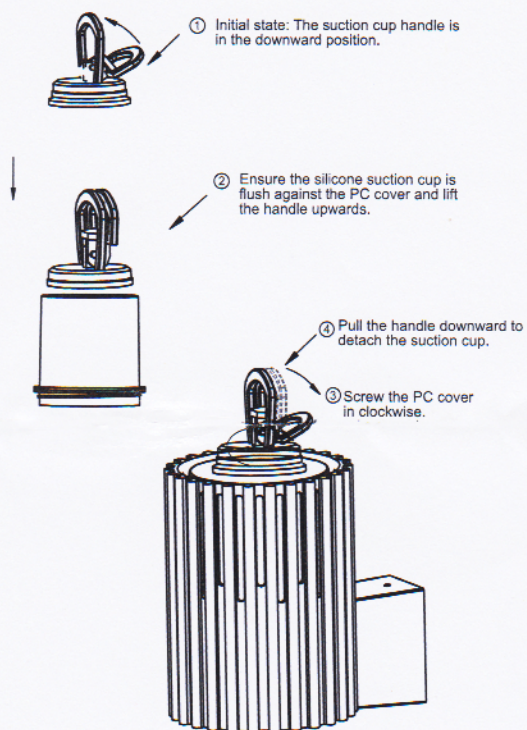


1. Use the suction cup to screw the PC cover in clockwise

7

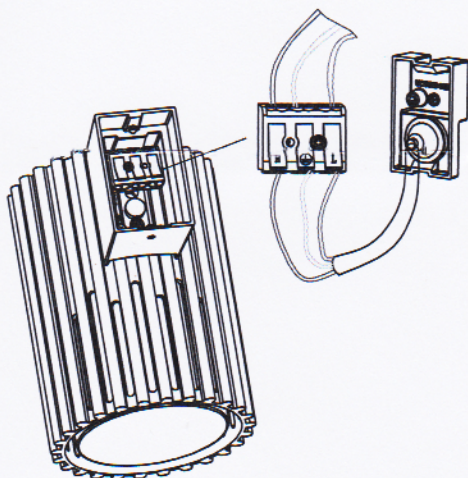

1. Insert the power supply wires into the designated push-in terminal blocks.

8

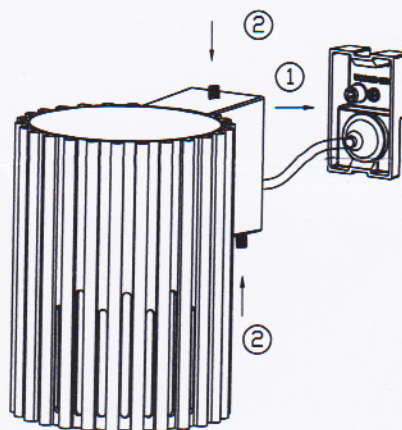

1. Insert the entire light fixture into the mounting base plate.
2. Tighten the screw clockwise.