


SQUARE

2 Gang Converter Switched Socket Outlet


The quick and simple way to increase the number of socket outlets in your place of work / home. Designed to fit flush mounted into an existing / new single 25mm deep metal or dry lining box in your wall / partitioning.

Simple Installation (Please retain for future use)


1. Switch off at the mains in order to isolate the single socket that you intend to replace

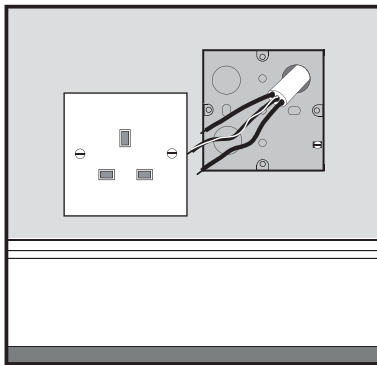


2. Remove and fully disconnect the single socket that you intend to replace.

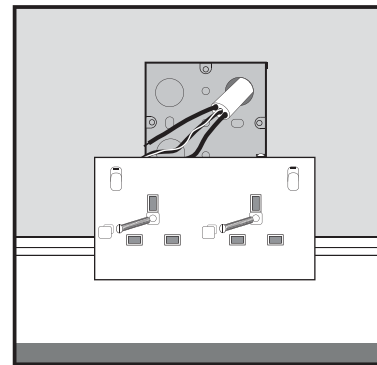

3. Ensure that there is sufficient length of cable tail to enable easy wiring and not too much to make losing the excess length in the back of the socket too difficult. Tighten the screw terminals onto the exposed wires maintaining correct polarity using the easy to follow wiring diagram.

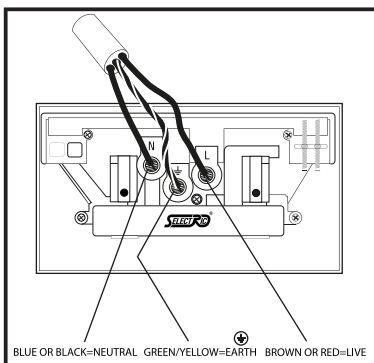

4. Remove fixing screws and cover caps that are housed inside the back of your converter socket. Screw the 2 screws through the holes located in the front of your converter socket and into the threaded holes provided in the wall box and tighten sufficiently to hold the converter socket in place. Do not overtighten.

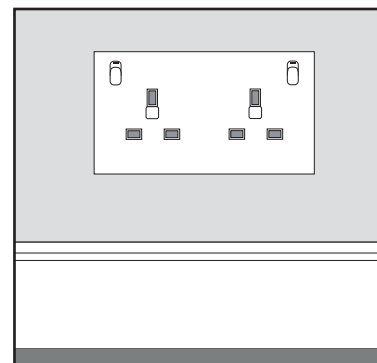

5. If you are fitting your converter switched socket outlet into a metal wall box, then you MUST make an earth connection between the converter switched socket outlet and the metal wall box. Use Green / Yellow sleeved earthing cable.

6. Place cover caps over the exposed holes on the front of the newly installed converter socket. Switch on at the mains and your converter socket is ready for use.

Connections

Brown or Red (Live) to L Blue or Black (Neutral) to N Bare Earth Wire, Sleeved Green/Yellow to E



SAFETY FIRST

- BEFORE STARTING ANY ELECTRICAL WORK ALWAYS SWITCH OFF AT THE MAINS
- IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN