

# TIMEGUARD®

## Wi-Fi Smart Lamp Holder Adapter

Model: WFLH



Installation & Operating Instructions

# 1. General Information

These instructions should be read carefully and retained for further reference and maintenance.

## 2. Safety

- To avoid electric shock, please turn OFF the power before installing.
- Do not plug in any lamp that exceeds the capacity of the Smart Lamp Holder Adapter.
- Always ensure the lamp is correctly inserted.
- Do not use in an enclosed fitting such as a flush ceiling luminaire.
- Do not use in bathrooms, shower rooms or open porches.
- For indoor use only.

## 3. Technical Specifications

- 230V AC 50Hz.
- Lamp Fitting: B22 Bayonet Cap.
- Lamp Type Max (Lamp not supplied);  
Incandescent/Halogen, CFL and LED lighting = 150W.
- Manual ON/OFF Control.
- Programmable ON/OFF Weekly Schedule via App.
- Operating Temperature: -10°C to +40°C
- Working Range: Approx. 30 meters (in an open area).
- WLAN-Standard: 802.11 b/g/n
- IP20 rated suitable for internal use only.
- CE Compliant.
- EC Directives: Conforms to the latest directives.
- Dimensions: H= 70mm, W= 62mm, D= 62mm.

## 4. System Requirements

- Smartphone/Tablet with at least iOS 8.0 or Android 5.0
- WLAN-enabled router: 2.4GHz (Separate Band)
- Tuya Smart App

## 5. Downloading App and Registration

**Note: the smartphone or tablet must be connected to a 2.4GHz band on the router. Paring on the 5GHz band will result in paring either timing out or being unsuccessful. Refer to your ISP (Internet Service Provider) on separating the bands if required.**

- Ensure your phone or tablet is connected to your local Wi-Fi network.
- Download the Tuya Smart App onto your phone or tablet by searching for 'Tuya Smart' on Google Play Store or the App Store. You can also scan the applicable QR code below;

2




- Install the App and open it to the registration screen. Click on the '**Register**' button.



3

- Tap **'Agree'** to accept the privacy policy.

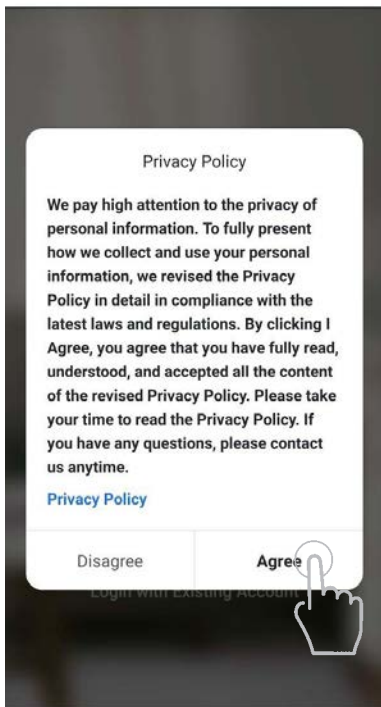

- Choose your region by selecting the Country Code. Enter your email address or phone number and click **'Get Verification Code'**.

< Email Mobile Phone Number

## Register by Email

United Kingdom +44 >

Email

Get Verification Code

I Agree [Service Agreement](#) and [Privacy Policy](#)

< Email Mobile Phone Number

## Register by Mobile Phone Number


United Kingdom +44 >

Mobile Phone Number

Get Verification Code


I Agree [Service Agreement](#) and [Privacy Policy](#)

- Enter the Verification Code sent to the email address or phone number that you provided. Once you have successfully entered the code, it will automatically move you to the Password screen.

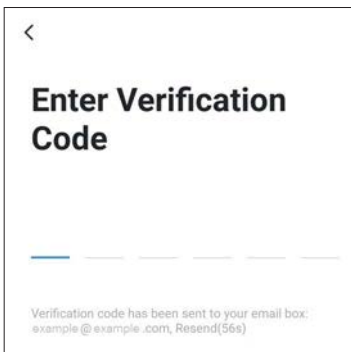


6

- Assign a password (this must be between 6 to 20 characters including letters and digits) and click '**Done**'.

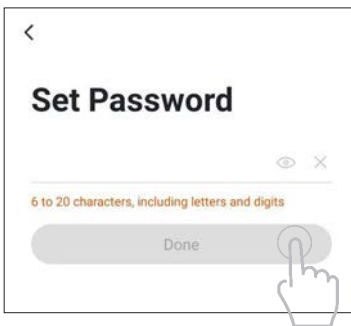

- You are now registered and by default will see the App home page.

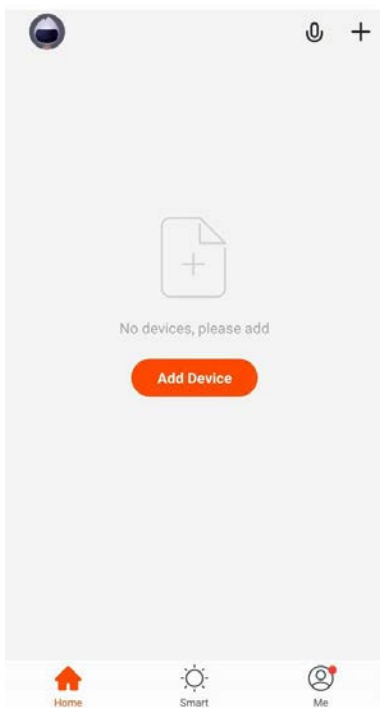




## 6. Home Management

**Note:** Before adding any devices to your account, structuring your household (or the property) may be a consideration if you plan on using Smart devices in different rooms or locations.

- Select the 'Me' option from the home page which will navigate you to your personal settings. From here you can setup a nickname for your profile i.e. 'Mr Smith's Account'.

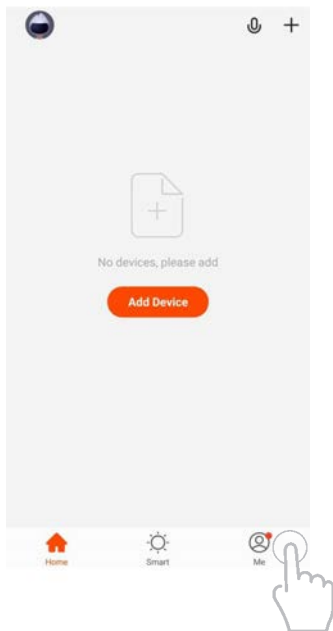

After this select the **'Home Management'** option.



**Tap to Set Nickname** >



Home Management



Message Center



FAQ & Feedback



More Services



Settings



Home



Smart



Me

- Select the **'Home Name'** option and enter your last name or even 'My Home' if preferred. (This is required to allocate devices to separate rooms later once paired).
- Next tick the rooms you wish to assign to your account; this can be changed at any time and custom room names can also be added.

< **Edit Home info** Done

---

Home Name\* Enter home name

---

Home Location Set location >

---

Rooms with Smart Devices:

Living Room	<input checked="" type="checkbox"/>
Master Bedroom	<input checked="" type="checkbox"/>
Second Bedroom	<input checked="" type="checkbox"/>
Dining Room	<input checked="" type="checkbox"/>
Kitchen	<input checked="" type="checkbox"/>
Study Room	<input checked="" type="checkbox"/>

---


**Add Room**

---

You can change room settings anytime.

## 7. Pairing your Device(s)

- To add a new device to your account, click the **'Add Device'** button (or click on the + button in the top right hand corner)

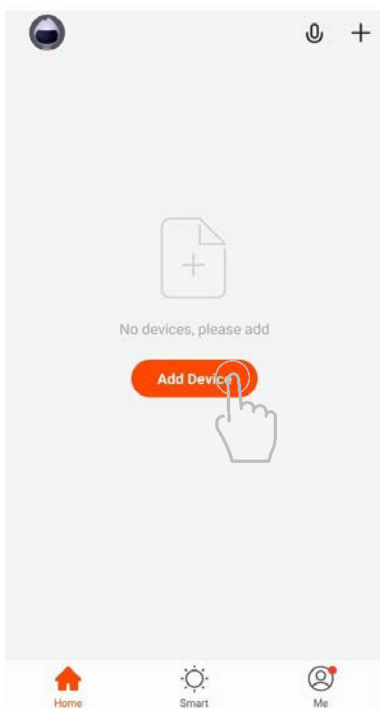


- Notice the different categories of products on the left hand side; it is essential that the correct product is selected for the pairing process to be successful. For the Wi-Fi Smart Lamp Holder Adapter, choose the **'Lighting'** category and select **'Lighting (Wi-Fi)'** option from the list.



- Make sure the Smart Lamp Holder Adapter is fitted correctly, using a suitable Lamp, and then turn the power to the circuit ON. The red Wi-Fi light will automatically flash (if not press and hold the power button located on the front Smart Lamp Holder Adapter for approx. 5 seconds, until the light rapidly flashes).

- Enter the password for the network and press the **'Next'** button.

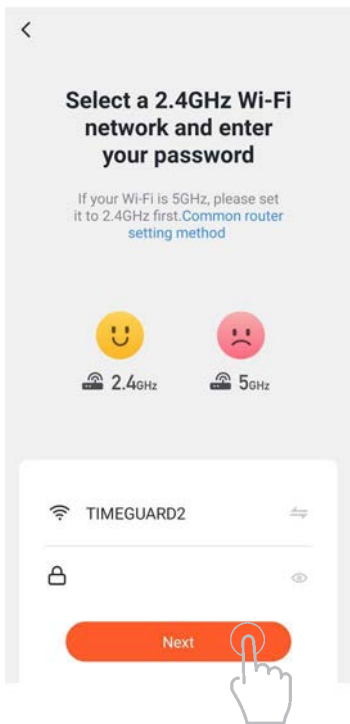




- Select the 'Fast Flashing (0.5 seconds / 1 time).'

<

### Select indicator status


Which of the following states is your device indicator?

 Fast flashing (0.5 seconds / 1 time)  >

 Slow flashing (3 seconds / 1 time) >


The indicator is not flashing? >


- The App will pair the smart product to the network. The time it takes for pairing to complete, which will differ depending on the network connection. Shortly into the pairing process, the flashing Wi-Fi light will turn OFF and then become stable. This indicates that the product has joined the network.

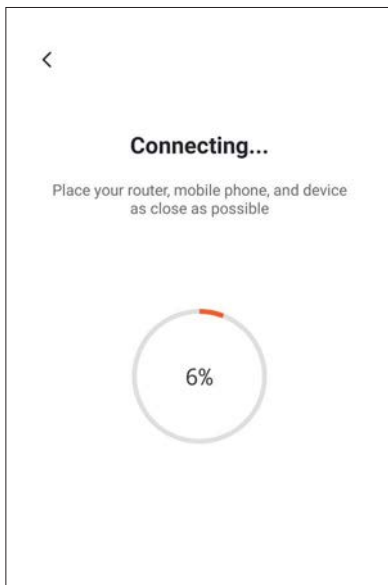



- If the following screen is displayed, then the product has been paired successfully. To rename your product, select the pencil icon. If this is not required, click on the **'Done'** button and you will be guided to the device controls menu.

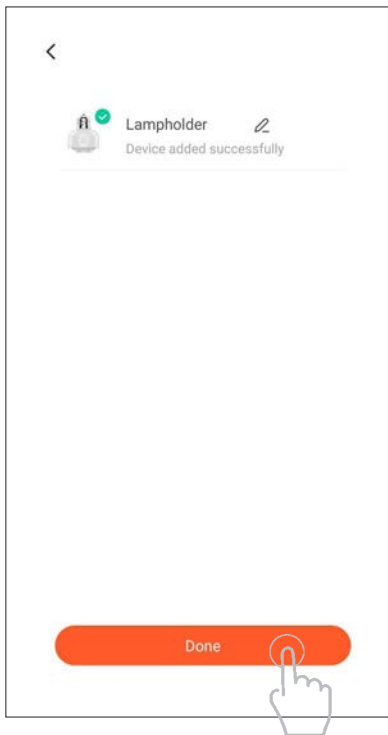

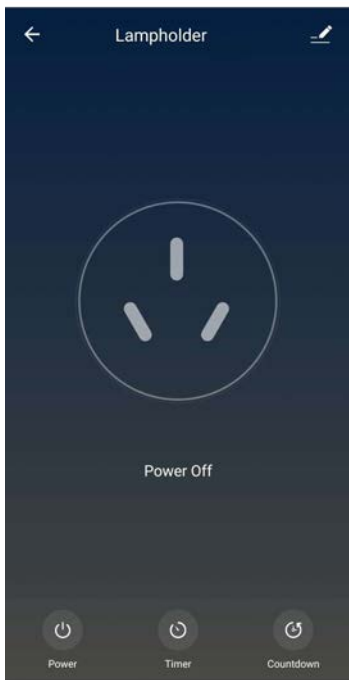


17

- To navigate back to the home screen, press the '**Back**' button. The newly paired Wi-Fi Smart Plug will now be listed.

**Note: If the pairing process was not successful, disconnect the mains supply from the product and re-establish power to the unit. Follow the bullet points from 'Section 7' to try again.**

## 8. Smart Home Assistant

- To add your device to your Smart Home Assistant services, such as Google Home or Amazon Alexa, follow the on-board instructions located on the TuyaSmart App. To do this, select the **'Me'** option from the home menu.

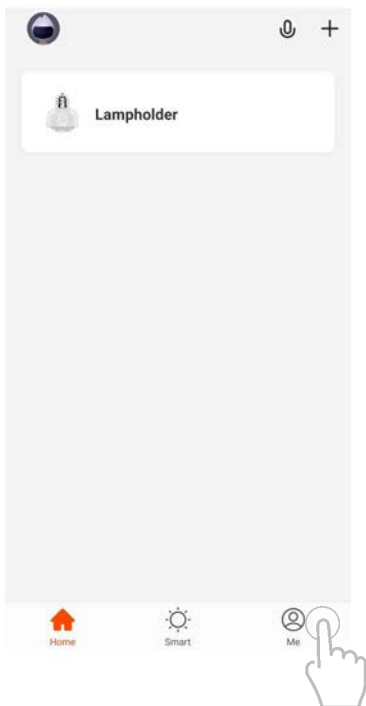

- Then select **'More Services'**.



**Tap to Set Nickname** >



Home Management >



Message Center >



FAQ & Feedback >



More Services >



Settings >



Home




Smart



Me

- On the more services screen, you will see support or different applications for automated Smart Home control. Follow the instructions on the TuyaSmart App to add the devices to your Smart Home Assistant service.

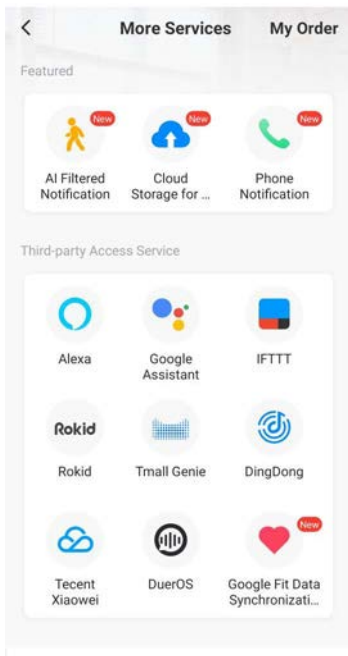

**Note: The Smart Home Assistant services supported by the TuyaSmart App may change as it is a 3rd party App Service. Any services that may be removed are the responsibility of TuyaSmart developers and not Timeguard.**

## 9. Support

**Note:** If you have any concerns that the intended application of this product does not meet your requirements, please contact Timeguard directly prior to installation.

## 10. Guarantee & Company Details

### 3 Year Guarantee

In the unlikely event of this product becoming faulty due to defective material or manufacture, within 3 years of the date of purchase, please return it to your supplier in the first year with proof of purchase and it will be replaced free of charge. For years 2 to 3 or any difficulty in the first year, telephone our helpline.

**Note: a proof of purchase is required in all cases. For all eligible replacements (where agreed by Timeguard) the customer is responsible for all shipping/postage charges outside of the UK. All shipping costs are to be paid in advance before a replacement is sent.**



If you experience problems, do not immediately  
return the unit to the store.

Telephone the Timeguard Customer Helpline:

HELPLINE

**020 8450 0515**

or email [helpline@timeguard.com](mailto:helpline@timeguard.com)

Qualified Customer Support Coordinators will be online  
to assist in resolving your query.



A **theben** Group Company

For a product brochure please contact:

**Timeguard Limited.**

Victory Park, 400 Edgware Road,  
London NW2 6ND

Sales Office: 020 8452 1112  
or email [csc@timeguard.com](mailto:csc@timeguard.com)

**[www.timeguard.com](http://www.timeguard.com)**