


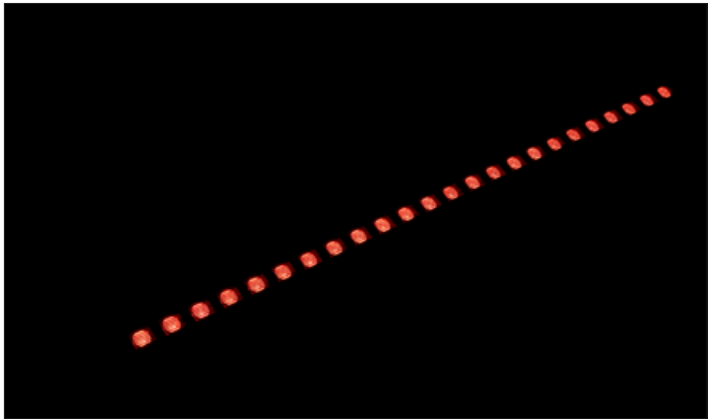

PRODUCT FEATURES

- Wall Washer Lighting
- Exterior IP67 Rating
- Fully Waterproof Structure
- Easy Installation
- High Brightness
- DMX Built-in Interface
- Single, RGBW Available
- Direct Connection Available
- Adjustable angle
- Anti-glare Honeycomb
- Various length available


PRODUCT SPECIFICATIONS

IP Rate	IP67
Power Input	DC 24V Constant Voltage with DMX built-in interface
Operating Temperature Ranges	-20°C to 50°C (-4°F to 122°F)
Beam Angle	10°, 15°, 25°, 40°, 60°, 15x55°
Available Color	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K, RGBW
Material	AL 6063 body, Tempered glass cover, 304 stainless steel bracket
Dimming	ON&OFF/DMX512
Lamp Life	55,000hr
Warranty	2 year


SPECIFICATIONS TABLE									
Model Name	Power Input	Lamp Power(W)	Lumens(lm) (CRI90)	Efficiency	Dimming	Available Color	Beam Angle	Operating mperature	IP
UTG13 40K-24V-L	DC 24V	13 W	1100 lm	110 lm/W	NON-DIMMABLE	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP67
UTG21 40K-24V-L	DC 24V	21 W	2300 lm					-20°C to 50°C	IP67
UTG42 40K-24V-L	DC 24V	42 W	3100 lm					-20°C to 50°C	IP67
UTGD13 40K-24V-L	DC 24V	13 W	1100 lm	110 lm/W	DIMMABLE (DMX512)	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP67
UTGD21 40K-24V-L	DC 24V	21 W	2300 lm					-20°C to 50°C	IP67
UTGD42 40K-24V-L	DC 24V	42 W	3100 lm					-20°C to 50°C	IP67
UTGD13 RGBW-24V-L	DC 24V	13 W	450 lm	60 lm/W	DIMMABLE (DMX512)	R · G · B · W	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP67
UTGD21 RGBW-24V-L	DC 24V	21 W	1300 lm					-20°C to 50°C	IP67
UTGD42 RGBW-24V-L	DC 24V	42 W	2450 lm					-20°C to 50°C	IP67

DIMENSIONS	


BEAM ANGLE

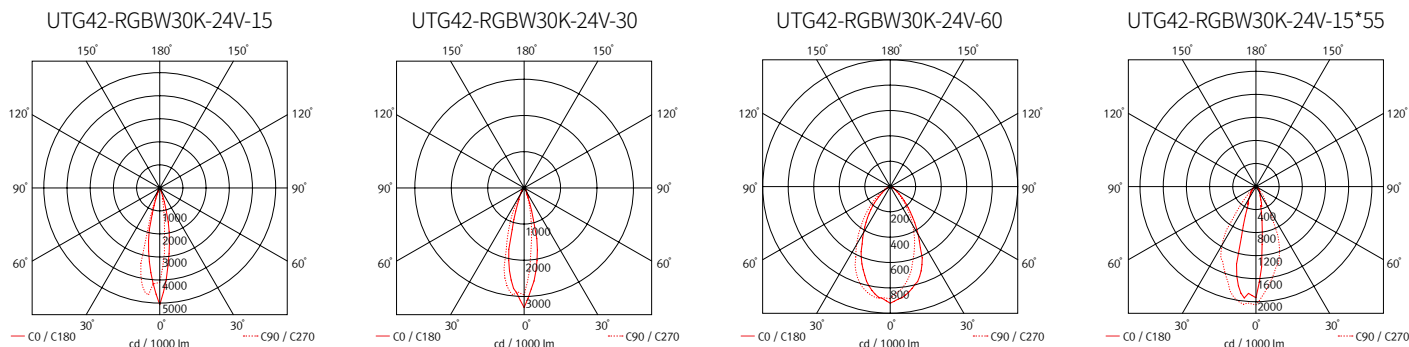



FLEXIBLE CONNECTIONG FIXTURE

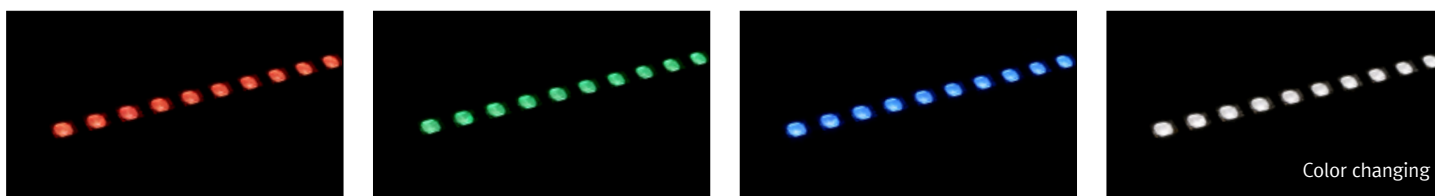

CONNECTION

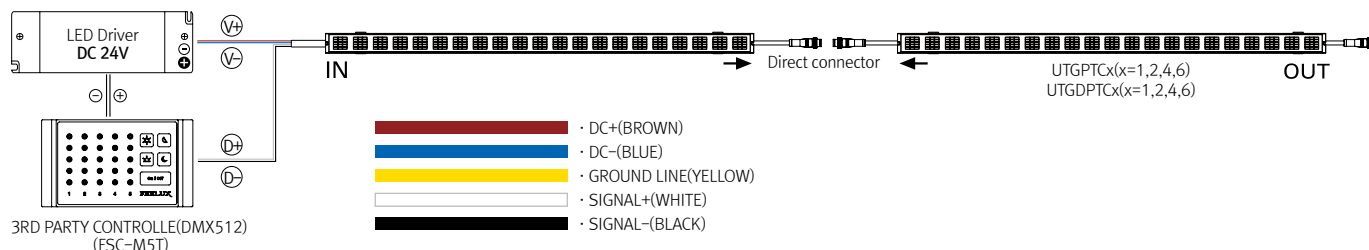

COMPONENTS

 Ultra Grazer (Single Kelvin - Non Dimming) _UTG13 40K-24V-L (13W) _UTG21 40K-24V-L (21W) _UTG42 40K-24V-L (42W)	 Open Power cable _UTLOPC (1,800mm) For Non-Dimming	 LED Drivers _FLC30-24V/T (30W) _FLC75-24V/T (75W) with distributor and power cord 1,800mm(6')
 Ultra Grazer (Single Kelvin - DMX512 Dimming) _UTGD13 40K-24V-L (13W) _UTGD21 40K-24V-L (21W) _UTGD42 40K-24V-L (42W)	 Connecting cable _UTLDPTC1(300mm) _UTLDPTC2(600mm) _UTLDPTC4(1,200mm) _UTLDPTC6(1,800mm) For Non-Dimming	 LED Driver _FLC200-24V/T (200W) with 12way distributor
 Ultra Grazer (RGBW Color Changing - DMX512 Dimming) _UTG13 RGBW-24V-L (13W) _UTG21 RGBW-24V-L (21W) _UTG42 RGBW-24V-L (42W)	 Open Power cable _UTLDOPC (1,800mm) For Dimming	 DMX Controller _FSC-M5T
 Connecting cable _UTLDPTC1(300mm) _UTLDPTC2(600mm) _UTLDPTC4(1,200mm) _UTLDPTC6(1,800mm) For Dimming		