


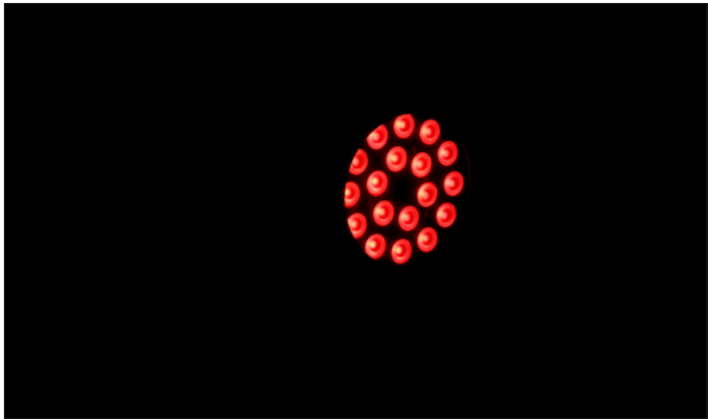

PRODUCT FEATURES

- High Brightness Spot lighting
- Exterior IP66 Rating
- Fully Waterproof Structure
- DMX Built-in Interface
- Single, RGBW Available
- Adjustable product: Various Beam angle options
- Anti-glare Honeycomb


PRODUCT SPECIFICATIONS

IP Rate	IP66
Power Input	DC 24V Constant Voltage with DMX built-in interface
Operating Temperature Ranges	-20°C to 50°C (-4°F to 122°F)
Beam Angle	10°, 15°, 25°, 40°, 60°, 15x55°
Available Color	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K, RGBW
Material	AL 6063 body, Tempered glass cover, 304 stainless steel bracket
Dimming	ON&OFF/DMX512
Lamp Life	55,000hr
Warranty	2 year


SPECIFICATIONS TABLE

Model Name	Power Input	Lamp Power(W)	Lumens(lm) (CRI90)	Efficiency	Dimming	Available Color	Beam Angle	Operating mperature	IP
UTS36 40K-24V-L	DC 24V	36 W	4500 lm	125 lm/W	NON-DIMMABLE	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP66
UTSD36 40K-24V-L	DC 24V	36 W	4500 lm	125 lm/W	DIMMABLE (DMX512)	1800K, 2200K, 2700K, 3000K, 4000K, 5000K, 6000K	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP66
UTSD36 RGBW-24V-L	DC 24V	36 W	1870 lm	54 lm/W	DIMMABLE (DMX512)	R · G · B · W	10°, 15°, 25°, 40°, 60°, 15x55°	-20°C to 50°C	IP66


DIMENSIONS

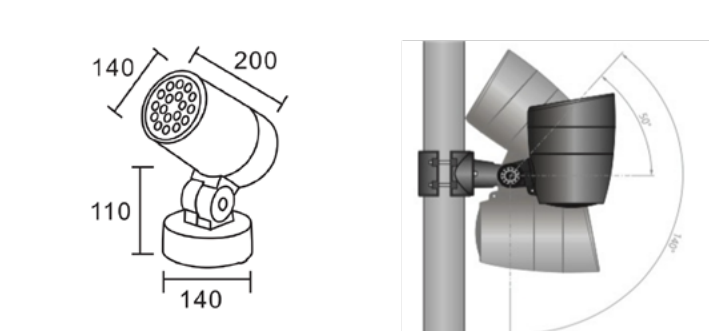





CONNECTION

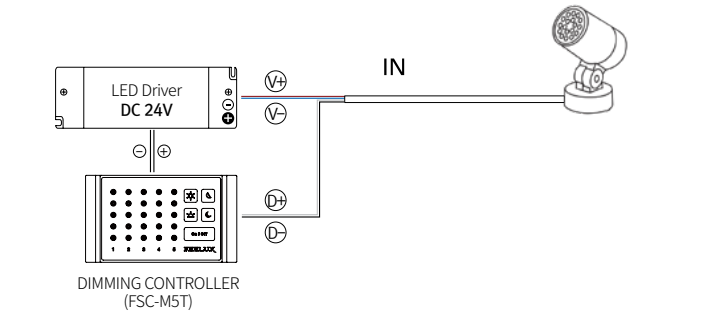

BEAM ANGLE

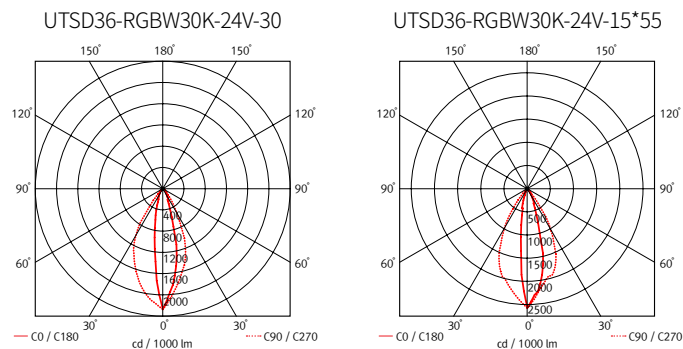

COLOR OPTION



COMPONENTS



Ultra Spot
(Single Kelvin - Non Dimming)
_UTS36 40K-24V-L (36W)



Ultra Spot
(Single Kelvin - DMX512 Dimming)
_UTSD36 40K-24V-L (36W)



Ultra Spot
(RGBW Color Changing - DMX512 Dimming)
_UTSD36 RGBW-24V-L (36W)



LED Drivers
_FLC30-24V/T (30W)
_FLC75-24V/T (75W)
with distributor and power
cord 1,800mm(6')



LED Driver
_FLC200-24V/T (200W)
with 12way distributor



DMX Controller
_FSC-M5T