
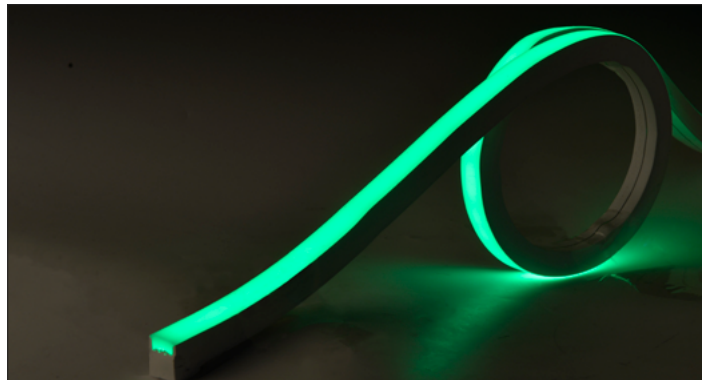


PRODUCT IMAGE

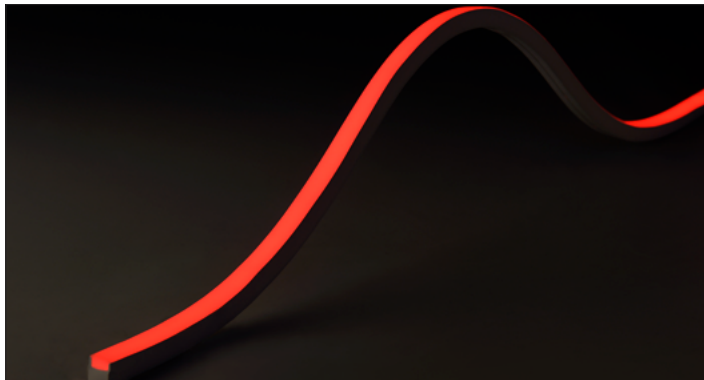

PRODUCT FEATURES

- IP67
- 4040RGB
- 13.86W/M; 98LED/M; 7LED/cell
- Dot-free illumination
- Side View: Bend direction vertically
- Indoor and outdoor application
- Dimension: 12×12mm
- First-class PVC material, UV-resistant

PRODUCT SPECIFICATIONS

LED Chip	4040 RGBW
IP Rate	IP67
Maximum length	5M
Power Input	24V DC
Watt per meter	13.8W/M
LED Q'ty per meter	98LED/M
Dimension	12×12mm
Cuttable	71.43mm
Minimum bend Diameter	120mm
Material	PVC
Operating Temperature Ranges	-20°C to 45°C
Beam Angle	110°

SPECIFICATIONS TABLE

Model Number	Color	CCT	Luminous Flux (lm/m)	Per Meter	Rated Watt (w/m)	Max.Length (m)	Min.Length (mm)	Rated Curr (A/m)
FN2 RGB	Red	620-630nm	>9.5lm/w	>39lm/m	4.1W/m	5	71.43	0.17
	Green	520-530nm	>20lm/w	>101lm/m	4.9W/m			0.20
	Blue	465-475nm	>4.8lm/w	>23lm/m	4.8W/m			0.20
	R+G+B (W)	N/A	>11.5lm/w	>161lm/m	13.86W/m			0.58

DIMENSIONS

