
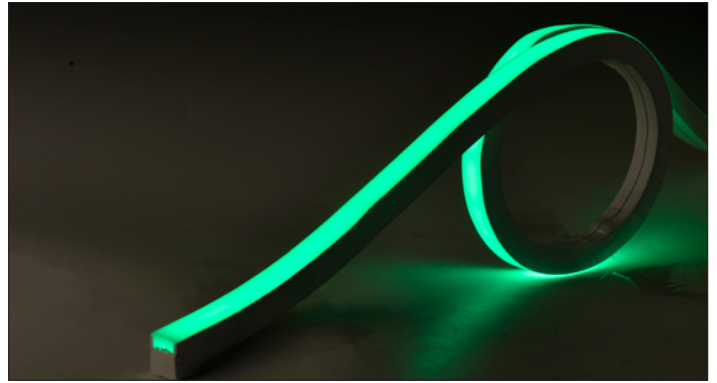


PRODUCT IMAGE

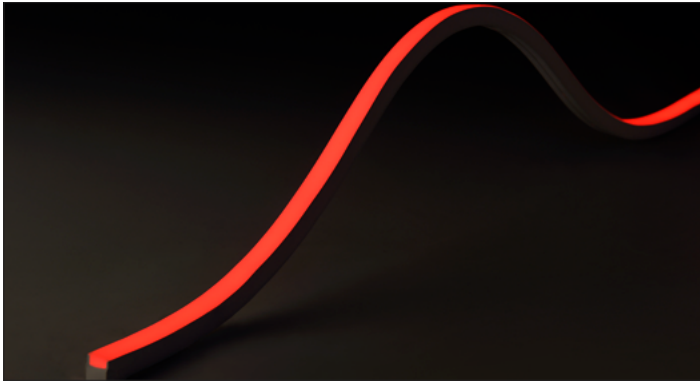

PRODUCT FEATURES

- IP67
- 2835RGB
- 15.04W/M; 120LED/M; 6LED/cell
- Dot-free illumination
- Side View: Bend direction vertically
- Indoor and outdoor application
- Dimension: 12×12mm
- Silicone material, UV-resistant

PRODUCT SPECIFICATIONS

LED Chip	2835 RGB
IP Rate	IP67
Maximum length	5M
Power Input	24V DC
Watt per meter	15.04W/M
LED Q'ty per meter	120LED/M
Dimension	12×12mm
Cutable	50mm
Minimum bend Diameter	50mm
Material	Silicone
Operating Temperature Ranges	-20°C to 45°C
Beam Angle	110°

SPECIFICATIONS TABLE

Model Number	Color	CCT	Lumen/W	Luminous Flux (lm/m)	Rated Watt (w/m)	Max.Length (m)	Min.Length (mm)	Rated Curr (A/m)
FN2 RGB	Red	633nm	>15.1lm/w	>74lm/m	4.9W/m	5	50	0.20
	Green	518nm	>37.8lm/w	>194lm/m	5.1W/m			0.21
	Blue	463nm	>8.8lm/w	>44lm/m	5W/m			0.21
	R+G+B (W)	N/A	>20.7lm/w	>312lm/m	15.04W/m			0.62

DIMENSIONS

