




**MR. RESISTOR®**  
Lighting Specialist Est. 1968


## PORTABLE RECHARGEABLE LED LIGHTING



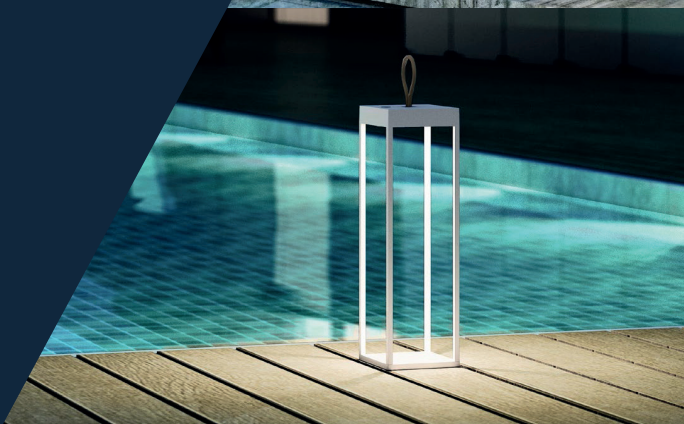





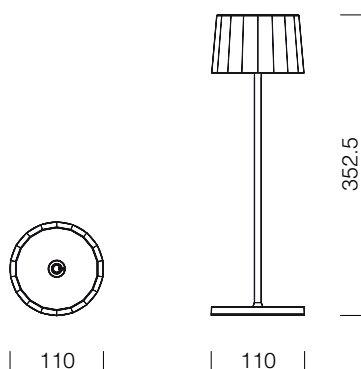





# Rechargeable Portable LED Lamps



## Finish available

Dark Grey		F1001-360A D/GRY
Matt White		F1001-360A M/WHT
Matt Black		F1001-360A M/BLK
Corten		F1001-360A CORTE
Yellow		F1001-360A YELLO
Orange		F1001-360A ORANG
Green Grey		F1001-360A G/GRY
Blue		F1001-360A BLUE



## Product description

Cordless table lamp providing direct downward and glare-free light. more than 9 hours of battery life. IP65 protection, making it ideal for indoor and outdoor use. Head, rod and base made in corrosion resistant and painted aluminium alloy. Protection with polyester powder coating. Diffuser made in polycarbonate. Product with no visible screws.


## Technical information

Light source: SMD LED Module  
 Colour temperature: 3000K  
 Colour rendering index: CRI > 80  
 Luminaire connected wattage: 2.2 W  
 Voltage: DC3.7V  
 Luminaire luminous flux: 150 lm  
 Light optics: 100°  
 Light distribution: Wide  
 Battery type: 18650 Li-ion battery  
 Battery capacity: 2200mAhx2  
 Battery charge: <6hrs  
 Battery life: >9hrs (100% light intensity)  
 Battery charge protection: Equipped with a self-protection system  
 Adapter incl-: CLASS II; Input AC100-240V 50/60Hz; Output DC5V 1A;  
 Cable incl-: 1.5m micro USB line  
 Switch: Touch ON/OFF  
 Dimmer: Touch stepless dimmable 100%-10%  
 Memory function: Memory of brightness  
 Protection class: IP65  
 Impact strength: IK 06  
 Safety: Class III  
 Weight: 0.86 kg





# Rechargeable Portable LED Lanterns

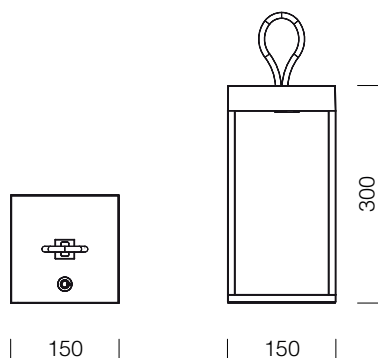

## Finish available

Dark Grey		F1010-300B D/GRY
Matt White		F1010-300B WHT
Matt Black		F1010-300B BLK
Corten		F1010-300B CORTE



## Product description

The battery LED lantern impresses with its modern design and energy-saving, via battery-powered lighting technology. Formally reminiscent of a classic lantern. The integrated Li-Ion battery provides sufficient energy for more than 9 hours of operation with the device on at 100% light intensity. The touch ON/OFF switch with dimmer, as well as the USB socket is located below the luminaire lid. With a completely empty battery, it takes about 6 hours until the charge state has reached 100% again. Silica gel handle. Painting with polyester powder coating. Product with no visible screws.



## Technical information

Light source: SMD LED Module  
 Colour temperature: 3000K  
 Colour rendering index: CRI > 80  
 Luminaire connected wattage: 2.2 W  
 Voltage: DC3.7V  
 Luminaire luminous flux: 200 lm  
 Light optics: 120°  
 Light distribution: Wide  
 Battery type: 18650 Li-ion battery  
 Battery capacity: 2200mA×2  
 Battery charge: <6hrs  
 Battery life: >9hrs (100% light intensity)  
 Battery charge protection: Equipped with a self-protection system  
 Adapter incl-: CLASS II; Input AC100-240V 50/60Hz; Output DC5V 1A;  
 Cable incl-: 1.5m micro USB line  
 Switch: Touch ON/OFF  
 Dimmer: Touch stepless dimmable 100%-10%  
 Memory function: Memory of brightness  
 Protection class: IP65  
 Impact strength: IK 06  
 Safety: Class III  
 Weight: 1.46 kg







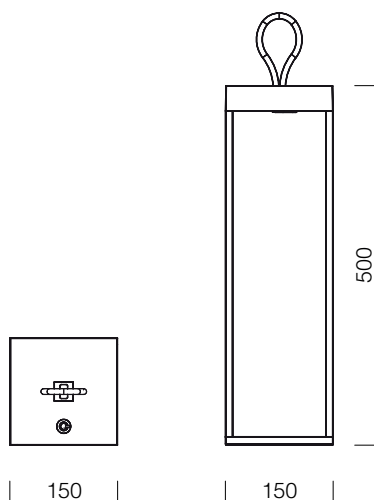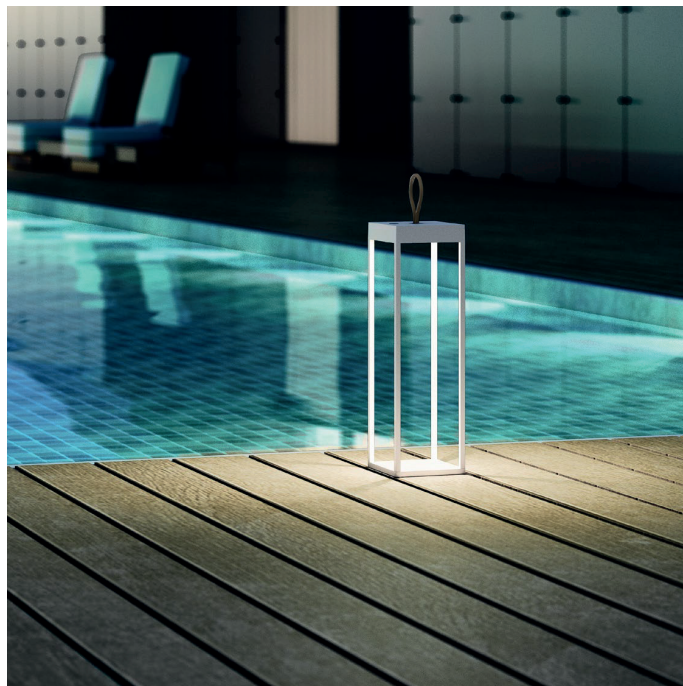

# Rechargeable Portable LED Lanterns



## Finish available

Dark Grey		F1010-500B D/GRY
Matt White		F1010-500B WHT
Matt Black		F1010-500B BLK
Corten		F1010-500B CORTE

## Product description

The battery LED lantern impresses with its modern design and energy-saving, via battery-powered lighting technology. Formally reminiscent of a classic lantern. The integrated Li-Ion battery provides sufficient energy for more than 9 hours of operation with the device on at 100% light intensity. The touch ON/OFF switch with dimmer, as well as the USB socket is located below the luminaire lid. With a completely empty battery, it takes about 6 hours until the charge state has reached 100% again. Silica gel handle. Painting with polyester powder coating. Product with no visible screws.

## Technical information

Light source: SMD LED Module  
 Colour temperature: 3000K  
 Colour rendering index: CRI > 80  
 Luminaire connected wattage: 2.2 W  
 Voltage: DC3.7V  
 Luminaire luminous flux: 200 lm  
 Light optics: 120°  
 Light distribution: Wide  
 Battery type: 18650 Li-ion battery  
 Battery capacity: 2200mA×2  
 Battery charge: <6hrs  
 Battery life: >9hrs (100% light intensity)  
 Battery charge protection: Equipped with a self-protection system  
 Adapter incl-: CLASS II; Input AC100-240V 50/60Hz; Output DC5V 1A;  
 Cable incl-: 1.5m micro USB line  
 Switch: Touch ON/OFF  
 Dimmer: Touch stepless dimmable 100%-10%  
 Memory function: Memory of brightness  
 Protection class: IP65  
 Impact strength: IK 06  
 Safety: Class III  
 Weight: 1.66 kg

020 8874 2234 | [info@mr-resistor.co.uk](mailto:info@mr-resistor.co.uk)

---

19 - 23 Lydden Road, Wandsworth, London, SW18 4LT, United Kingdom

**[www.mr-resistor.co.uk](http://www.mr-resistor.co.uk)**