




RIGEL INSTALLATION

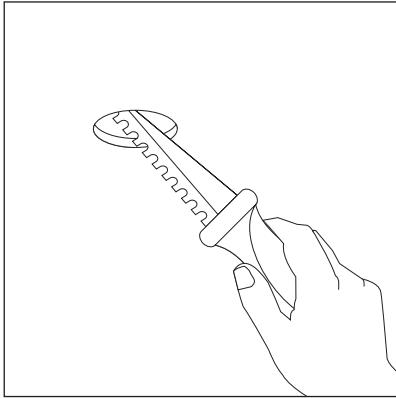


1. Cut hole for downlight

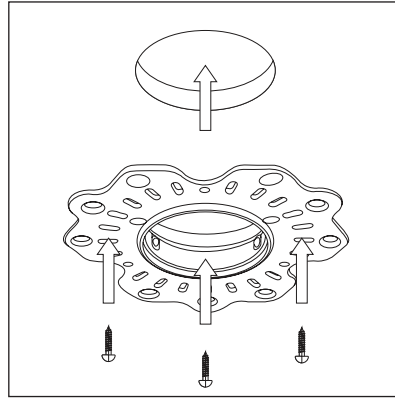


2. Screw base to ceiling

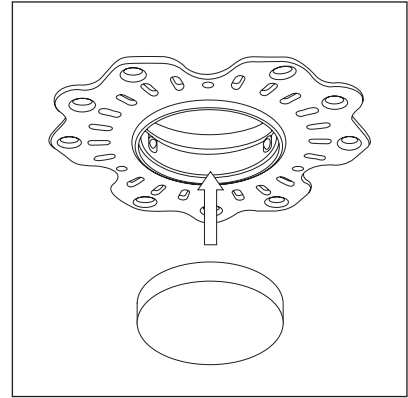


3. Insert protective foam

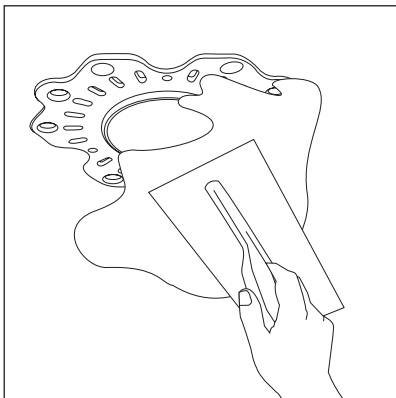


4. Plaster to base lip

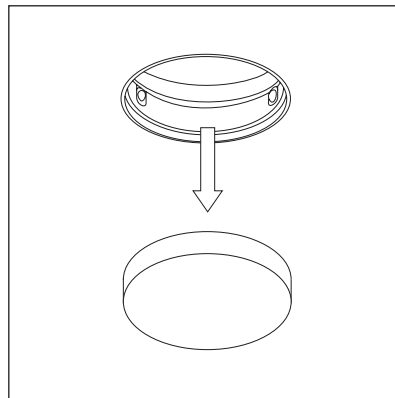


5. Remove protective foam

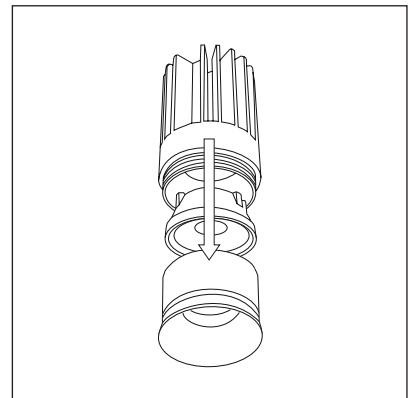


6. Assemble downlight

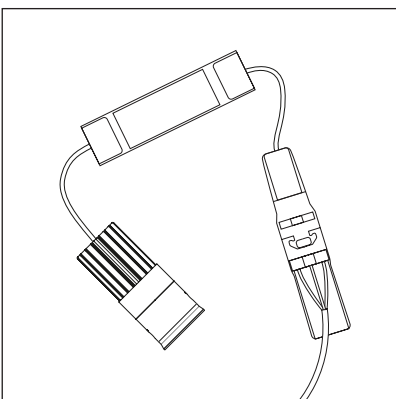

7. Connect module to LED driver. Connect driver to power using the connector

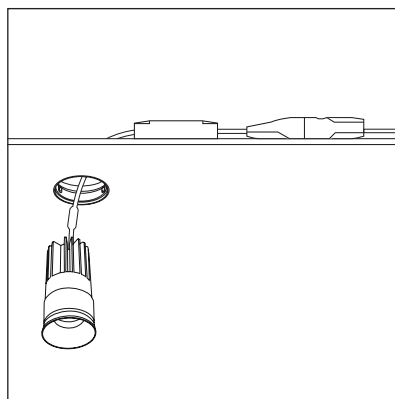

8. Fit connector and driver through hole and fit light module into frame

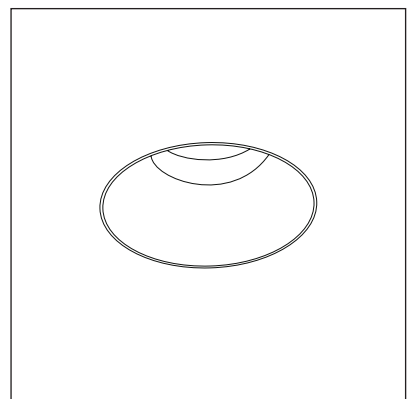

9. Downlight complete

When using the 7W module, ensure the driver is set to ≤ 200 mA. For TRIAC drivers, set it to 180 mA