




SLIMDUET-GL

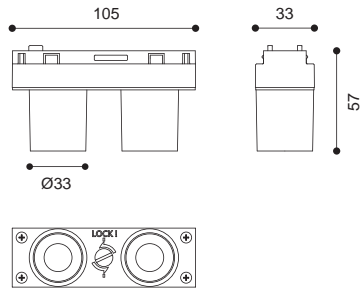

1617.409A



h(m)	D(m)	E(lx)
19°		
1.0	0.34	2290
2.0	0.68	572
3.0	1.02	254
4.0	1.36	143
5.0	1.70	91



h(m)	D(m)	E(lx)
35°		
1.0	0.62	753
2.0	1.25	188
3.0	1.88	83
4.0	2.51	47
5.0	3.14	30

LED Consumption	Voltage	Lumen	Beam Angle	CCT/CRI	Locking Type
5.3W	24V DC	399 (lm)	19°/35°	30/90+	Twist

