

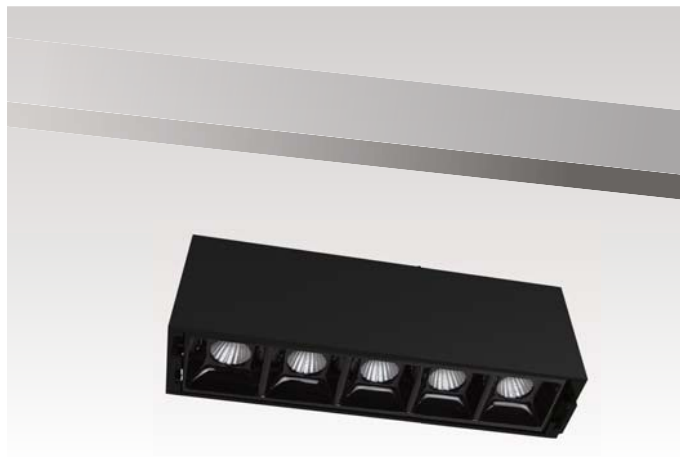


SLIMDUET-K

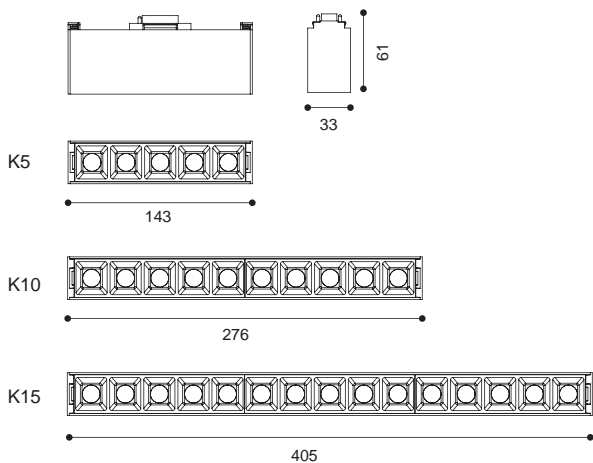


K5



| h (m) | D (m) | E (lx) |
|-------|-------|--------|
| 44° | | |
| 1.0 | 0.80 | 1543 |
| 2.0 | 1.60 | 385 |
| 3.0 | 2.40 | 171 |
| 4.0 | 3.20 | 96 |
| 5.0 | 4.00 | 61 |

K10



| h (m) | D (m) | E (lx) |
|-------|-------|--------|
| 46° | | |
| 1.0 | 0.84 | 3073 |
| 2.0 | 1.69 | 768 |
| 3.0 | 2.54 | 341 |
| 4.0 | 3.39 | 192 |
| 5.0 | 4.24 | 122 |

Colours Black White

| | LED Consumption | Voltage | Lumen | Beam Angle | CCT/CRI | Locking Type |
|-----|-----------------|---------|-----------|-------------|---------|--------------|
| K5 | 11W | 24V DC | 1000 (lm) | 15°/30°/40° | 30/90+ | Push |
| K10 | 22W | 24V DC | 2000 (lm) | 15°/30°/40° | 30/90+ | Push |
| K15 | 33W | 24V DC | 3000 (lm) | 15°/30°/40° | 30/90+ | Push |

