

Fixture TU BEAM, color black, length 44.5", 4000 k, down, mounting type suspended


Ref. FPTY014-0740V0B



TECHNICAL SPECIFICATIONS

Color	■ black anodized
Cover	DOT optics / blend
Mounting type	Suspended
Lighting direction	down
IP protection rating	20
Luminous flux of the fixture	1750 lm
Luminare power	27 W
Efficiency	65 lm/W
Color temperature	4000 K
Lifetime	70000 h
Color Rendering Index CRI	95
MacAdam's ellipse	3 SDCM
Input voltage	24 V
Protection class	I
Dimensions LxHxW	44.5" x 3" x 2.4"

TECHNICAL DRAWING

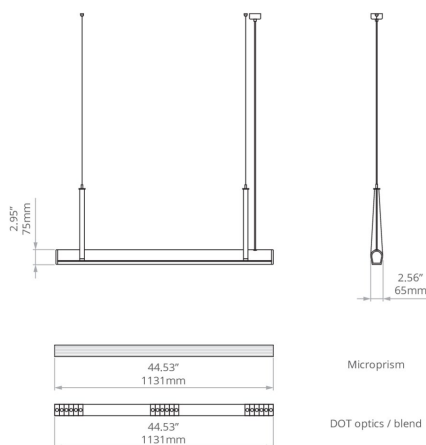

- Easy and intuitive adjustment, thanks to specially designed belts - the design provides full freedom of rotation, in every direction, by 360 degrees
- Two types of optics - focusing optics with blend, lamellas
- Possibility to obtain UGR < 10
- Three unique stylistic variants - Coastal, Industrial and Natural
- Modern soft shape of the profile
- Equipped with a light source, electronics and mounting accessories

SAMPLE PROJECTS

