

# DIVA 2 DUAL

LED for Display, Cabinet, Furniture & Cove

Dynamic white LED



각각의 개성





### Product Features

- Super Slim liner LED with white color changing output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

### Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 2700K ~ 6000K
- Color rendering : Ra > 80
- Energy efficiency : 75 lm/W
- Degree of protection IP20

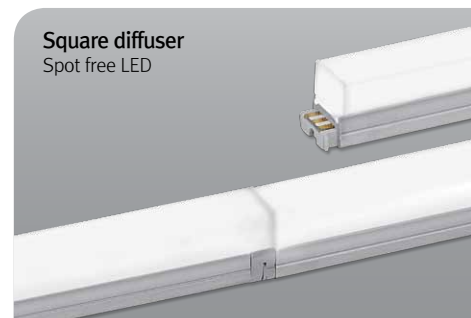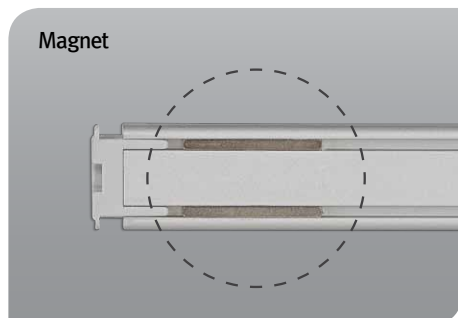



**DIVA 2 HO**  
Dynamic White



Diva2 DUAL 3W Length (145 mm)



Diva2 DUAL 6W Length (285 mm)



Diva2 DUAL 12W Length (565 mm)




Diva2 DUAL 18W Length (845 mm)




Diva2 DUAL 24W Length (1123mm)

## Various options

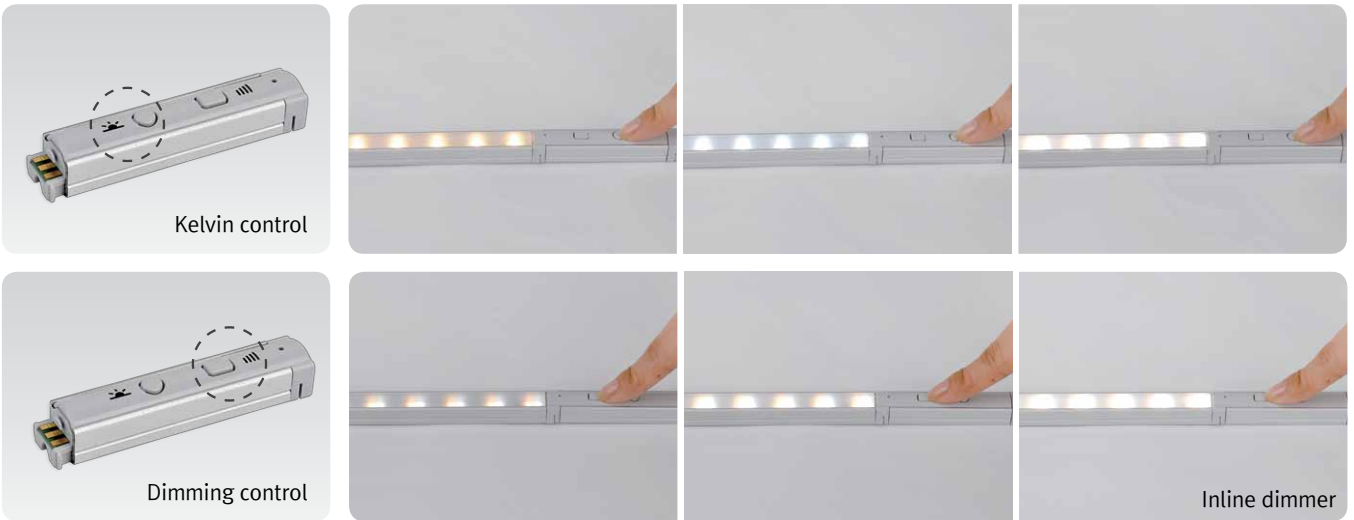


## Dimension

\* Fixture

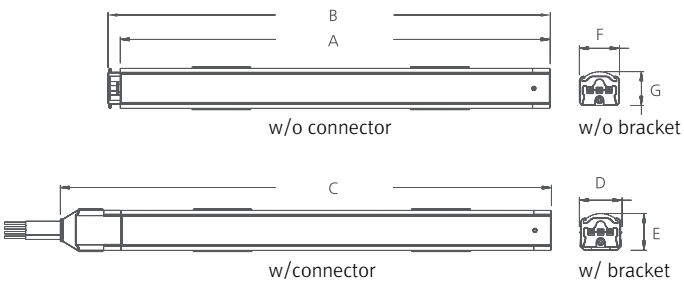


Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
DDV3AWCB24M	DC 24	2.9	140	145	162	16	14	15	12.5
DDV6AWCB24M	DC 24	5.8	280	285	302	16	14	15	12.5
DDV12AWCB24M	DC 24	11.6	560	565	582	16	14	15	12.5
DDV18AWCB24M	DC 24	17.4	840	845	862	16	14	15	12.5
DDV24ABWCB24M	DC 24	23.2	1118	1123	1140	16	14	15	12.5


\* Fixture with round diffuser

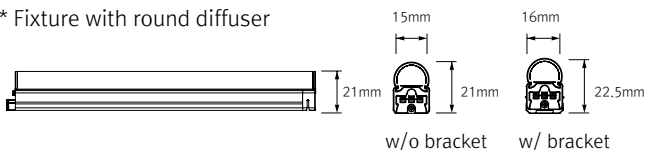


\* Inline dimmer

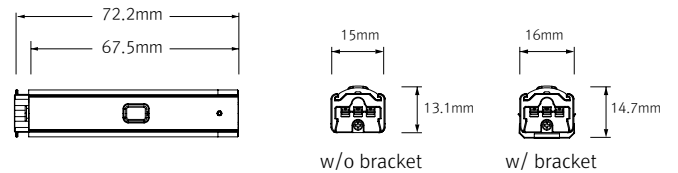

\* Fixture with square diffuser

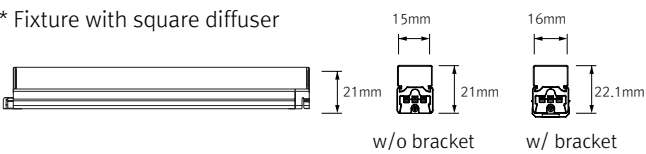

\* LED Converter

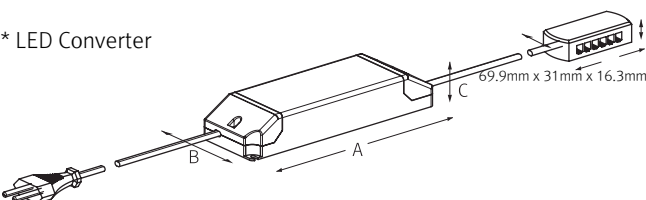


Modle name	A (mm)	B (mm)	C (mm)
FLC15-24V/T	121	45	16
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32

## Easy connection



## Installation

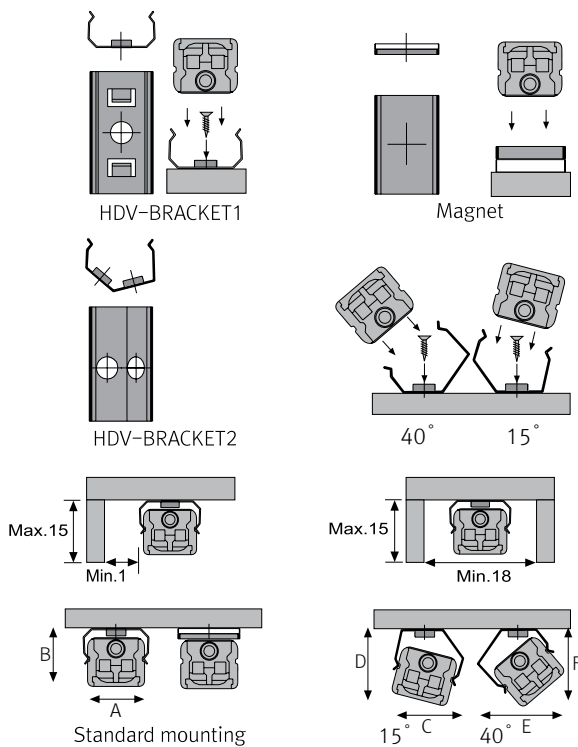

## Max. connection

- DIVA2 DUAL : 75Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
DDV3AWCB24M	5	10	25
DDV6AWCB24M	2	5	12
DDV12AWCB24M	1	2	6
DDV18AWCB24M	-	1	4
DDV24AWCB24M	-	1	3

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	16.8	14.2	17.5	16.5	19.1	17.5
Round type	16.8	22.1	18.8	24.4	23.4	22.9
Square type	16.8	22.6	21.3	26.2	25.7	25.7

**Accessories**

**Ⓐ Connecting cables (Between DIVA2 DUAL & DIVA2 DUAL)**

HDVPTC	HDVPTC1	HDVPTC2	HDVPTC4	HDVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

**Ⓑ Power feed : HDVPC**

Power feed 2500mm (Between DIVA2 DUAL & 6-way distributor)

**Ⓒ Mounting bracket : HDV-BRACKET1**

Included in fixture

**Ⓓ Angle bracket (15° & 40°) : HDV-BRACKET2**

**Ⓔ Sidefeed for seamless extension (3W) : DDV3AWCB24M/S**

The dimension is the same as DDV3AWCB24M

**Ⓕ End cap : HDV - CAP**

Included in fixture

**Ⓖ LED Driver with 6way distributor, with power cord(1800mm)**

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/T
Capacity	15W 24V	30W 24V	75W 24V

**Ⓗ Inline Dimmer : DDVDIM (Max 75W in a row)**

**Ⓘ Round diffuser**

HDV3CVRM	HDV6CVRM	HDV12CVRM	HDV18CVRM	HDV24CVRM
3W	6W	12W	18W	24W

**Ⓛ Square diffuser**

HDV3CVSM	HDV6CVSM	HDV12CVSM	HDV18CVSM	HDV24CVSM
3W	6W	12W	18W	24W

**Ⓚ Connecting bracket : HDV-BRACKET3**

Included in fixture

