




Spectrum LED Emergency Surface Exit Blade

Surface Recessed (09011)

- Sleek, low profile design
- Supplied with New Up Legend as standard
- Suitable for Commercial and Industrial installations
- Maintained and Non Maintained
- 25M Viewing Distance
- Viewable from both sides

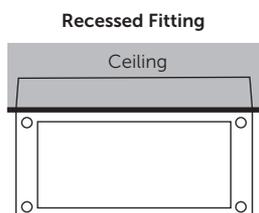


Manual Push Test Indicator

Once activated, unit illuminates for 5 minutes to indicate fitting is functioning correctly. Key Test feature can also be used.

Surface Mounted (09012)

- Sleek, low profile design
- Can be mounted to ceiling or wall
- Supplied with New Up Legend as standard
- Suitable for Commercial and Industrial installations
- Maintained and Non Maintained
- 25M Viewing Distance
- Viewable from both sides

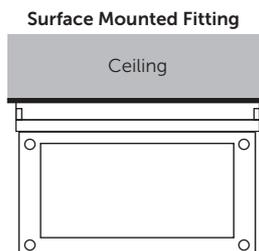

Manual Push Test Indicator

Once activated, unit illuminates for 5 minutes to indicate fitting is functioning correctly. Key Test feature can also be used.



Rotating fixing, can be mounted to ceiling or wall at 90° angle

09011 / 09012 Legend Options



09013 New (ISO) Legend Reversible Left & Right

09014 (ISO) New Legend Down

09016 Old (Euro) Legend Reversible Left & Right

09017 Old (Euro) Legend Down


09018 Old (Euro) Legend Up

Spectrum


Technical Specification

Data	
Construction	Polycarbonate/Aluminium
LED Chip	Samsung
IP Rating	IP20
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9

09011 Recessed Exit Blade

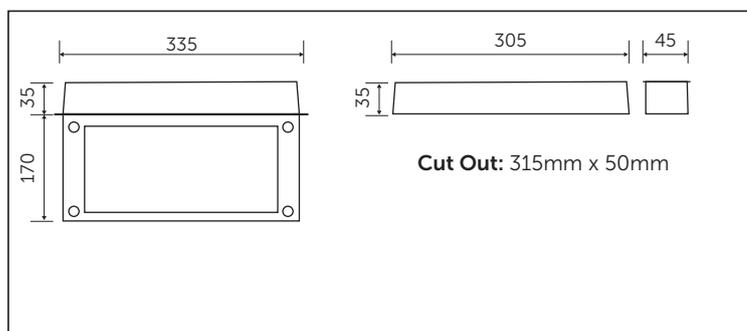

09012 Surface Exit Blade

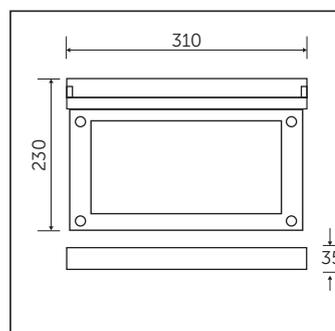

Code	W	Description	Viewing Distance	Temp	Hours
09011	2.5	LED Emergency Exit Blade Recessed including Up Legend. Maintained/Non Maintained	25M	6500K	25000
09012	2.5	LED Emergency Exit Blade Surface including Up Legend. Maintained/Non Maintained	25M	6500K	25000
09013	-	New Legend Left + Right for Exit Blade	-	-	-
09014	-	New Legend Down for Exit Blade	-	-	-
09015	-	New Legend Up for Surface Exit Blade (spare accessory)	-	-	-
09016	-	Old Legend Left + Right for Exit Blade	-	-	-
09017	-	Old Legend Down for Exit Blade	-	-	-
09018	-	Old Legend Up for Exit Blade	-	-	-



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of Ra 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)