FEELUX

Change your Light, Change your Life!

FLX Stix NDFree

Slim, Simple, Safe, Fast Integral Driver



FLX Stix NDFree

- Easy and Quick Snap Connection
- LED Driver is integral
- Innovative Slim design
- Line Voltage Phase Dimming
- Seamless and Spot Free

CRI	Ra〉90	Watt	3, 5, 10, 15, 20W
Lumen	90 lm/W	Color	2700/3000/3500/4000K
Length	156 (6.14˚)/ 291.5 (11.48˚)/ 569.5 (22.42˚) / 848 (33.39˚)/ 1126 (44.33˚) mm		

Wide voltage range
(AC 110V, 220-240V, 277V)

FLicker-free

Phase dimming

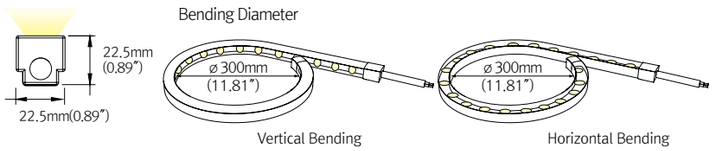

FLXible Neon Lens 3D

Flexible LED, bending both horizontally and vertically.
IP 67 rating suitable for wet locations with UV-resistant Silicon material.
Various beam angles available with optics,
Field-cuttable to have design freedom.
Extrusion, louver, angle bracket accessory
Tunable available

Input	DC 24V	Watt	20W/m	IP Rating	IP67
Lumen	80lm/W	CRI	Ra〉90		
Colors	2400/2700/3000/3500/4000/ 2200K~4000K (Tunable white)				
Beam angle	22˚, 30˚, 40˚, 10X30˚				

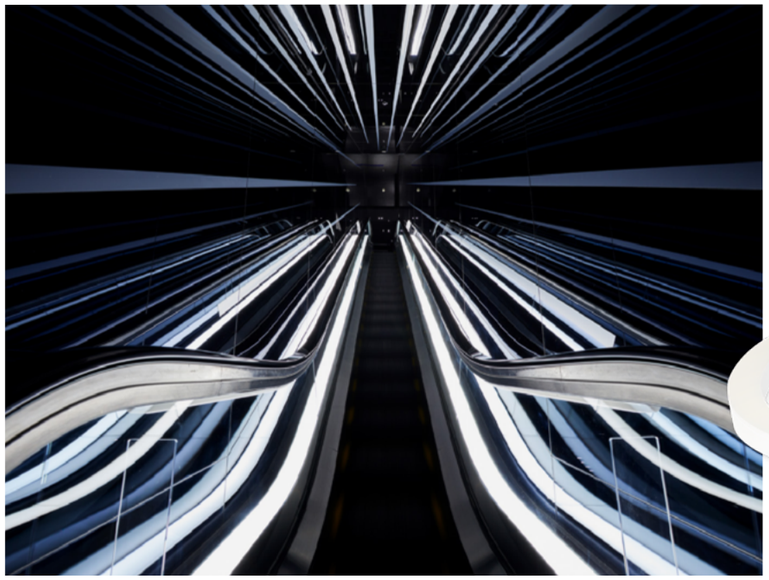

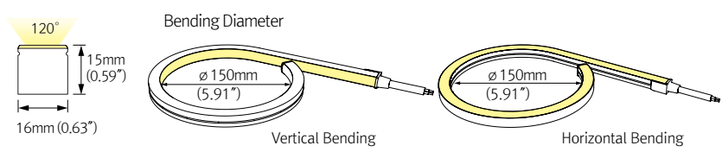

FLXible Neon 3D

Flexible LED, bending both horizontally and vertically.
IP 67 rating suitable for wet locations with UV-resistant. Silicon material.
Cuttable and flexible to have design freedom.
RGBW available.

Input	DC 24V	Watt	10W/m	IP Rating	IP67
Lumen	80lm/W	CRI	Ra〉90		
Colors	2400/2700/3000/3500/4000/6000K/RGB				

FLX SPOT DVP

Versatile Mini LED Spotlight



FLX Spot DVP

- With constant voltage DC 24V driver
- Mini spotlight with various beam angle
- Dimmable with available accessories
- Available in black and white
- Special option : silver and gold

CRI	Ra〉90	Watt	3W
Lumen			98 lm/W
Colors			2700/3000/3500/4000K
Beam Angle			28˚ 40˚ 50˚

Round surface type

Square surface type







Special Order Options

FLX Spot DVP POLE

- With constant voltage DC 24V driver
- Mini Spotlight Pole with various beam angle
- Dimmable with available accessories
- Available in black and white
- Special option : silver and gold

CRI	Ra〉90	Watt	3W
Lumen			98 lm/W
Colors			2700/3000/3500/4000K
Beam Angle			28˚ 40˚ 50˚



FLX SPOT DVP POLE

Versatile Mini LED Spotlight





★ Linkable between FLX Spot DVP (POLE)
and FLX Spot DVP (POLE)
(Max. 10 units connectable)

FLX Stix CDV

Ultra Slim Refrigeration Lighting



FLX Stix CDV

- Asymmetric Beam Angle for multiple applications
- Super slim Freezer and Cooler Lighting
- High Efficiency(115lm/w)
- High CRI(Ra>90)
- IP65 Rating
- Operating Temperature : -35℃~35℃(-95~95° F)
- Occupancy Sensor Ready
- Beam angle : Asymmetric, Batwing Wall washer, 40°

CRI	Ra>90	Watt	4,8,12,16,20W
Lumen	115lm/W	Color	3000/4000K/MEAT RED
Length	300(11.81")/600(23.62")/900(35.43")/1200(47.24")/1500(59.06") mm		



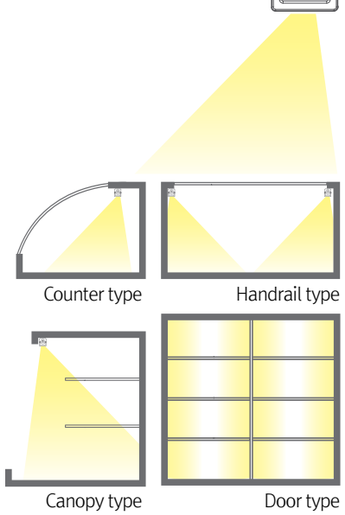

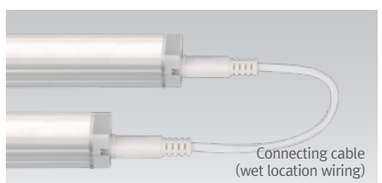

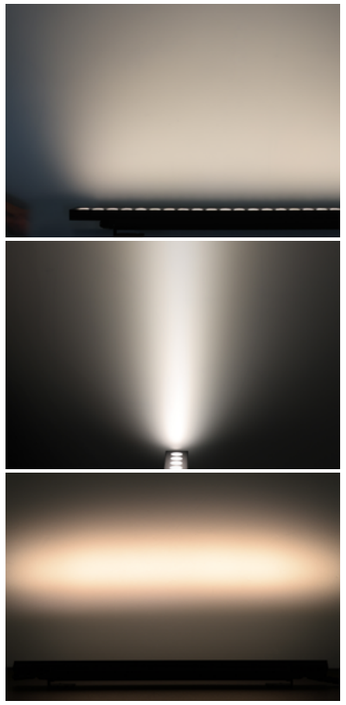

LuxFeel Interior Line

High output Grazer with Multiple Beam Angles



LuxFeel Interior Line

- Indoor & Outdoor Application
- Versatile: Fitting shop, Hotel, Facades
- IP 67: Water resistance and suitable for outdoor use
- Adjustable product : Various Beam angle options
- Rotatable product to be adjusted conveniently
- High color rendering
- Various length available

Input	DC 24V	Watt	12/24/36/48W
IP Rating	IP67	Lumen	80lm/W
CRI	Ra>90	Colors	3000/4000K
Beam angle	10X60° , 30° , 40°		
Length	300 (11.81")/ 600 (23.62")/ 900 (35.43") / 1200 (7.24")mm		

FLT Collection

Magnetic Low Voltage Track System

- Various lighting fixtures on a single track
- Easily extendable with direct connector
- Safe with constant voltage DC 24V
- Available in various colors
- Easy magnetic installation

Power Connector
_FLTOPC-BK
_FLTOPC-WT

Direct Connector
_FLTCPL-BK
_FLTCPL-WT

Direct Connector (Non-conductive)
_FLTCPL-NC-BK
_FLTCPL-NC-WT

90˚ Connector
_FLTCPL-90-BK
_FLTCPL-90-WT

90˚ Connector (Non-conductive)
_FLTCPL-90-NC-BK
_FLTCPL-90-NC-WT

Flexible Connector
_FLTPTC- FLEX-BK
_FLTPTC- FLEX-WT

FLT-SS06

Input	DC 24V	Watt	6W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	70lm/W	Colors	2700/3000/3500/4000K

FLT-SS09

Input	DC 24V	Watt	9W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	78lm/W	Colors	2700/3000/3500/4000K

FLT-SS15

Input	DC 24V	Watt	15W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	73lm/W	Colors	2700/3000/3500/4000K

FLT-SS20

Input	DC 24V	Watt	20W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	73lm/W	Colors	2700/3000/3500/4000K

DOUBLE JOINT
(SS06,SS09,SS15,SS20 available)

Input	DC 24V	Watt	6 / 9 / 15 / 20W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	70 / 78 / 73 / 73lm/W	Colors	2700/3000/3500/4000K

FLT-SL06

Input	DC 24V	Watt	6W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	70lm/W	Colors	2700/3000/3500/4000K

FLT-SM02

Input	DC 24V	Watt	2W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	55lm/W	Colors	2700/3000/3500/4000K

FLT-SM12

Input	DC 24V	Watt	12W
CRI	Ra>90	Beam angle	15˚ / 24˚ /36˚
Lumen	85lm/W	Colors	2700/3000/3500/4000K

FLT-LS10-L

Input	DC 24V	Watt	4W
CRI	Ra>90	Beam angle	21˚/40˚/52˚
Lumen	84.2lm/W	Colors	2700/3000/3500/4000K

FLT-LS30-L

Input	DC 24V	Watt	12W
CRI	Ra>90	Beam angle	21˚/40˚/52˚
Lumen	80lm/W	Colors	2700/3000/3500/4000K

FLT-LM30

Input	DC 24V	Watt	10W
CRI	Ra>90	Beam angle	125˚
Lumen	77lm/W	Colors	2700/3000/3500/4000K

FLT-SP20
FLT-SP30

Input	DC 24V	Watt	2W
CRI	Ra>90	Beam angle	24˚/36˚
Lumen	89lm/W	Colors	2700/3000/3500/4000K

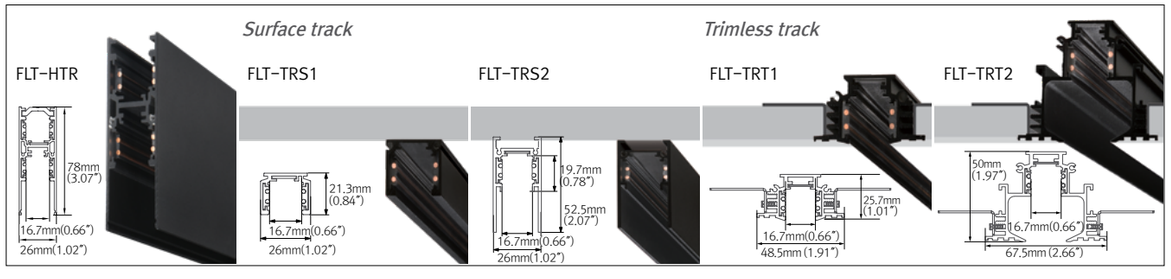

Suspension Power Kit for TRS1/ TRS2
_FLT-SK-POWER1-BK, WT
_FLT-SK-POWER2-BK, WT

Suspension Bracket for TRS1 / TRS2
_FLT-SK-BRACKET1-BK, WT
_FLT-SK-BRACKET2-BK, WT

Color Filter
_FLT-Filter-20/R.G.B.Y (For SS20)
_FLT-Filter-09/R.G.B.Y (For SS06.09,15)



Honeycomb
_FLT-Honeycomb-20 (For SS20)
_FLT-Honeycomb-09 (For SS06.09,15)

Anti-Glare Hood
_FLT-Hood-20 (For SS20)
_FLT-Hood-09 (For SS06.09,15)

MonoRail2

Modular Low Voltage Rail System for Flexibility and Creativity



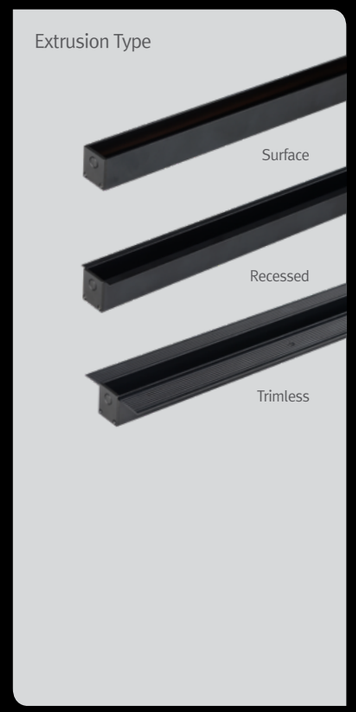

MonoRail2

High-end slim linear LED with magnetic system & aluminum extrusion

Watt	3/4/8W	CRI	Ra>90
Lumen			80lm/W
Colors			2700/3000/3500/4000K

MonoRail2 Spot

Mini spotlight with magnetic system & aluminum extrusion

Watt	3W	CRI	Ra>90
Lumen			80lm/W
Colors			2700/3000/3500/4000K

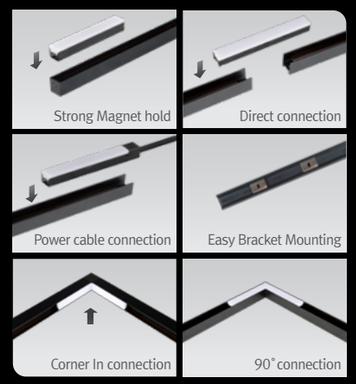

MonoRail Pro (MNP)

Display and Cove Lighting for a long run lengths in low voltage systems.The Rail can light other Feelux DC products as a power track. Available in black and silver. 90+ CRI. Dimmable.

Input	DC 24V	CRI	Ra>90
Lumen			85lm/W
Colors			2700/3000/3500/4000/5700K

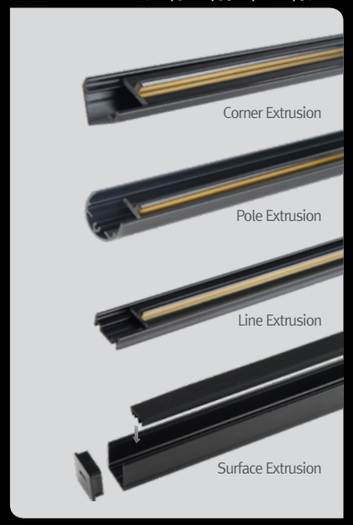

MonoRail Spot Pro 1 (MSP1)

The perfect LED for showcase display, cabinet and furniture. Slide and swivel LED spotlight. Compatible and linkable with the MonoRail system. Available in 15˚, 35˚ beam angles.

Watt	1.3W	CRI	Ra>90
Lumen	70lm/W	Beam angle	15˚, 35˚

MonoRail Spot Pro HO 3 (MSP3)

High Power version of Monorail Spot. 25˚, 45˚, and 60˚ beam angles.

Watt	2.6W	CRI	Ra>90
Lumen	98lm/W	Beam angle	28˚, 40˚, 50˚

MonoRail Spot Pro HO 6 (MSP6)

More rotatable version of Monorail Spot 25˚, 45˚, and 60˚ beam angles.

Watt	6W	CRI	Ra>90
Lumen	95lm/W	Beam angle	28˚, 38˚, 60˚

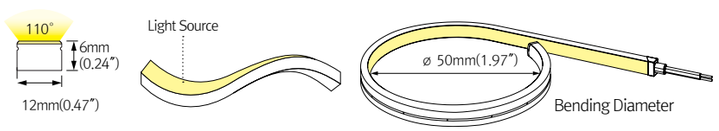

FLXible Tape Pro

Ultra slim flexible LED, spot free, indoor and outdoor application.
IP66 rating with UV-resistant Silicon material.
Cuttable and flexible to have design freedom.
Available in standard lengths of 1, 2, 3, 4, 5M reels
Extrusion, Inpc available

Input	DC 24V	Watt	15W/m	IP Rating	IP66
Lumen	100lm/W	Max run lengths	5M	CRI	Ra>90
Colors				2400/2700/3000/3500/4000K	

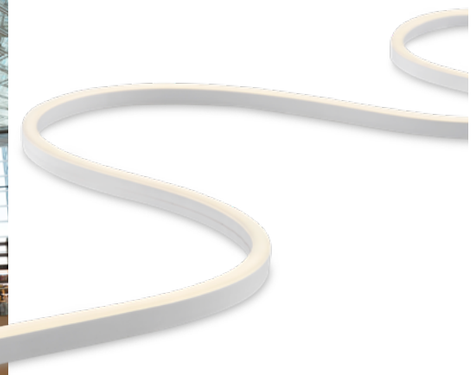

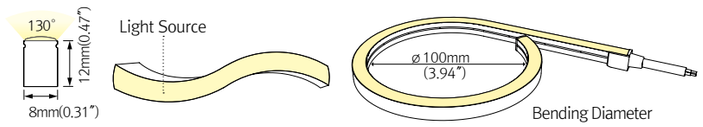

Ultra slim flexible LED, spot free, indoor and outdoor application.
IP67 rating with UV-resistant Silicon material.
Cuttable and flexible to have design freedom.

FLXible Neon 1

Input	DC 24V	Watt	10W/m	IP Rating	IP67
Lumen	40lm/W	Max run lengths	5M	CRI	Ra>90
Colors				2200/2700/3000/3500/4000K	

FLXible Neon 1 Dual

Input	DC 24V	Watt	5.8W/ft	IP Rating	IP67
Lumen	40lm/W	Max run lengths	5M	CRI	Ra>90
Colors				2200K~4000K (Tunable white)	

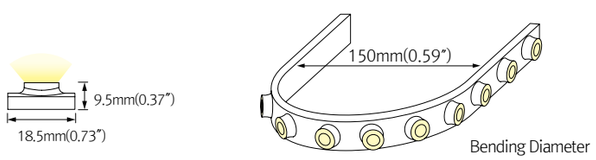

FLXible Tape Tako

Ultra slim flexible LED, spot free, indoor and outdoor application.
IP67 rating with UV-resistant PU material.
Cuttable and flexible to have design freedom.

Input	DC 24V	Watt	18W/m	IP Rating	IP67
Lumen	100lm/W	Max run lengths	5M	CRI	Ra>90
Colors				2700/3000/3500/4000K	
Beam angle				30°, 45°, 60°, 20X45°	

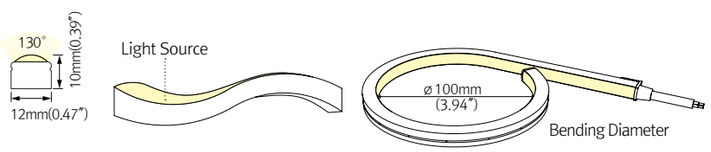

Ultra slim flexible LED, spot free, indoor and outdoor application.
IP67 rating with UV-resistant Silicon material.
Cuttable and flexible to have design freedom.

FLXible Neon 2

Input	DC 24V	Watt	10W/m	IP Rating	IP67
Lumen	65lm/W	Max run lengths	5M	CRI	Ra>80
Colors				2200/2700/3000/3500/4000K	

FLXible Neon 2 Dual

Input	DC 24V	Watt	5.8W/ft	IP Rating	IP67
Lumen	65lm/W	Max run lengths	5M	CRI	Ra>80
Colors				2200K~4000K (Tunable white)	

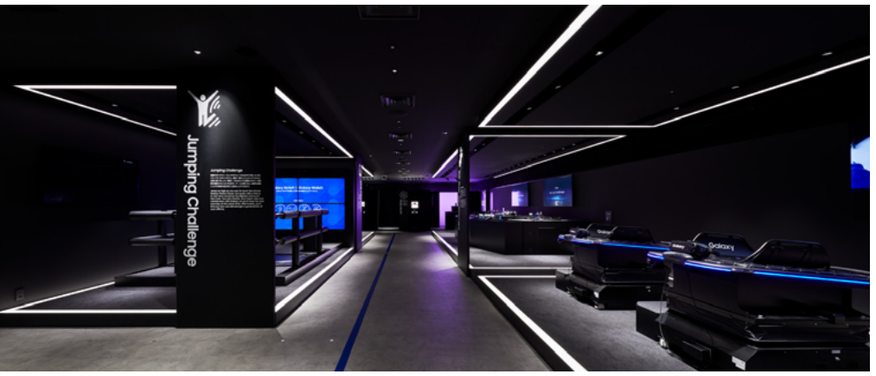

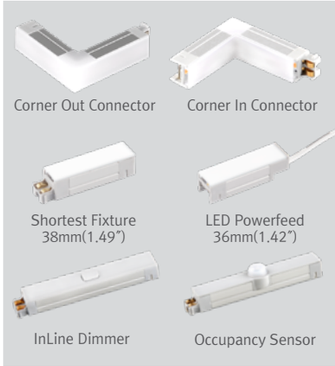

FLX Stix NDPro

Ultra slim profile, spot free, seamless engineered fixture with tight pitch LEDs for even surface illumination and perfected color consistency. 90+ CRI. Dimmable.

CRI	Ra>90	Watt	0.5/1/3/4/7/11/15W
Lumen	80lm/W	Colors	2200/ 2700/3000/4000K

Length 100(3.94") / 193(7.60") / 284(11.18") / 564(22.20") / 843(33.19") / 1122(44.17") mm

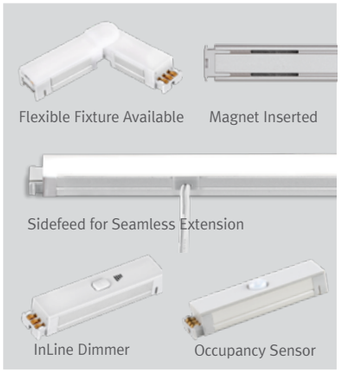

FLX Stix HDPro

High output version of FLX Stix NDPro where more light is needed. 90+ CRI. Dimmable.

CRI	Ra>90	Watt	3/6/12/18/24W
Lumen	80lm/W	Colors	2200/ 2700/3000/4000K

Length 145(5.71") / 285(11.22") / 564(22.20") / 843(33.19") / 1122(44.17") mm

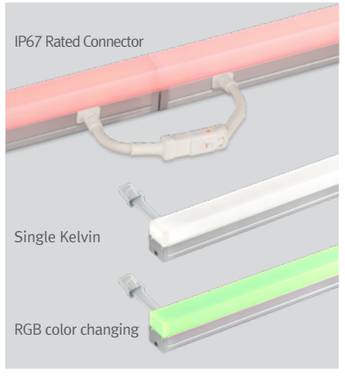

FLX Stix ODV

Slim profile LED for exterior applications. Easy installation. IP66 Rating. Dimmable.

Input DC 24V	IP Rating IP66	Lumen 95lm/W

Length 143(5.63") / 283(11.14") / 562(22.13") / 841(33.11") mm Colors RGB/2700/3000/4000K

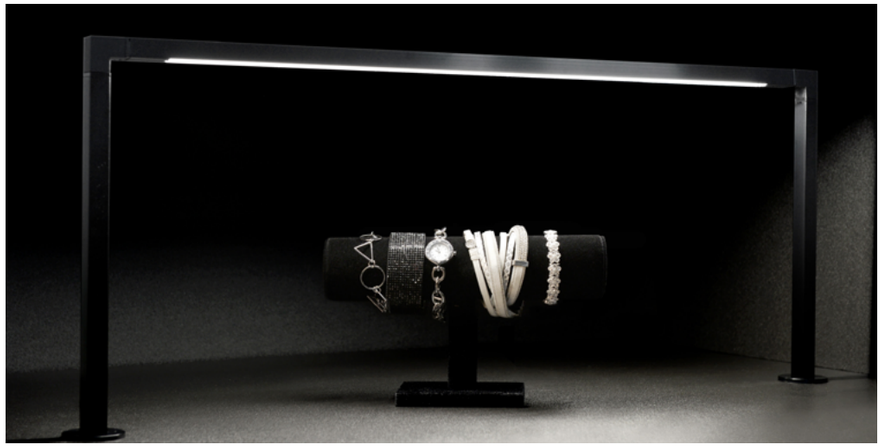

NDPro Showcase Arm

- Aluminum body with rotating light bar
- Easy assembly with FLX Stix NDPro fixture
- Various length available
- Ideal for showcase and furniture



Lamp Power	Luminous Flux (4000K)	A	B
NDP 4W	300 lm	396.5mm(15.61")	381mm(15")
NDP 7W	570 lm	676.5mm(26.63")	661mm(26.02")
NDP 11W	860 lm	955.5mm(37.62")	940mm(37.01")
NDP 15W	1210 lm	1234.5mm(48.60")	1219mm(47.99")

MonoRail Showcase Arm

- Aluminum body with rotating MonoRail Pro(MNP) and Spot(MRS)
- Easy assembly with MonoRail Pro(MNP) and Spot(MRS)
- Various length available
- Ideal for showcase and furniture



Lamp Power	Luminous Flux (4000K)	A	B
MNP 1W	113 lm	396.5mm(15.61")	381mm(15")
MNP 4W	362 lm	676.5mm(26.63")	661mm(26.02")
MNP 8W	722 lm	955.5mm(37.62")	940mm(37.01")
MRS 1W	97 lm	1234.5mm(48.60")	1219mm(47.99")
MRS 3W	246 lm		

SlimLamp Slide

LED for Cove, Contour and Cabinet.

Linear perfection with Slimlamp Slide LED

- Easy slide connection system
- Slim design with seamless lighting
- Dimmable
- Round Diffuser (Square also available)
- Slide-Up Replacing System

Dim to Warm system

Dim to Warm, Tunable White, 0-10V/1-10V 2CH dimming

- Slim interface with multiple functions
- Dim to warm mode
- Tunable white mode
- Quick mode change with a function switch
- Dip Switch to select 0-10V and 1-10V mode
- 1CH 100W, Total 2CH, 200W

FDD-L20

SSL Specification

- Voltage : AC 100-240V
- Lumen : 100lm/W
- Wattage : 3W/5W/10W/15W/20W/25W
- Colors : 2700K/3000K/3500K/4000K/5700K
- CRI>90
- IP20
- Max connection: 400W(12.60")
- Length: 150mm(5.91"), 320mm (12.60"), 580mm (22.83"), 870mm (34.25"), 1160mm (45.67"), 1450mm (57.09")

SlimLamp Slide (SSL)

VSSL Specification

- Dimming: 0-10V, Dali
- Tunable version available
- Voltage : AC 100-277V
- Lumen : 85lm/W
- Wattage : 5W/10W/15W/20W
- Colors : 2700K/3000K/3500K/4000K/5700K
- CRI>90
- IP20
- Max connection: 400W
- Length: 150mm(5.91"), 320mm (12.60"), 580mm (22.83"), 870mm (34.25"), 1160mm (45.67"), 1450mm (57.09")

SlimLamp Slide-V (VSSL)





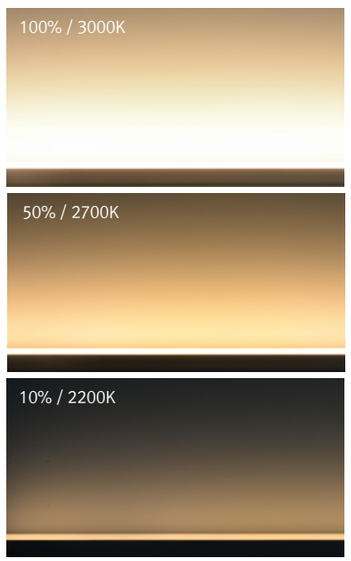

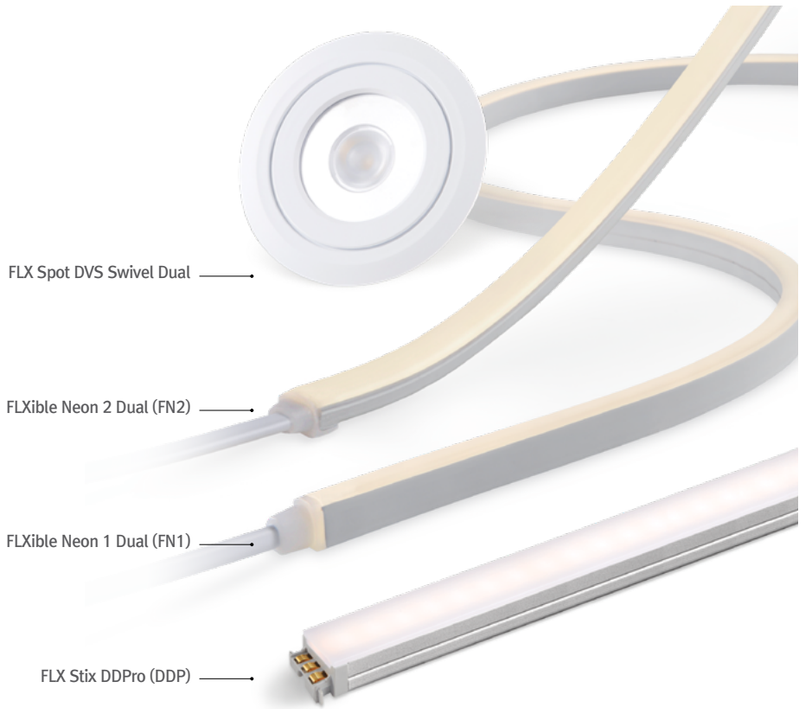

FEELUX LIGHTING CANADA Ltd.
2800 John Street, Markham, ON, Canada Tel: 647-484-0460

www.feeluxcanada.com