

• **Tips**

This product shall be installed in accordance with local and national electrical regulations and by a licensed holder who is familiar with the construction and operation of the product.

Yes, it does! Before installing the luminaire, cut OFF the power or turn the switch OFF.

Don't solder the connecting wire, please use the junction box.

Please do not place on the lamps and lanterns the decoration that does not come with the packing box

Prevent Short circuit or overload

Do not place heat insulation on the luminaire

Mounted on a non-conductive surface

Do not operate in an environment where the ambient temperature is higher than 40°C or lower than -20°C


Ensure that the operating voltage used is within the voltage range indicated on the volume label

Can only be installed in dry room

The electric conductors of different kinds of lamps can not touch each other


The light source in this luminaire can only be replaced by the manufacturer or its agent or a similar qualified person

**Ultra-thin clear track-installation procedure**

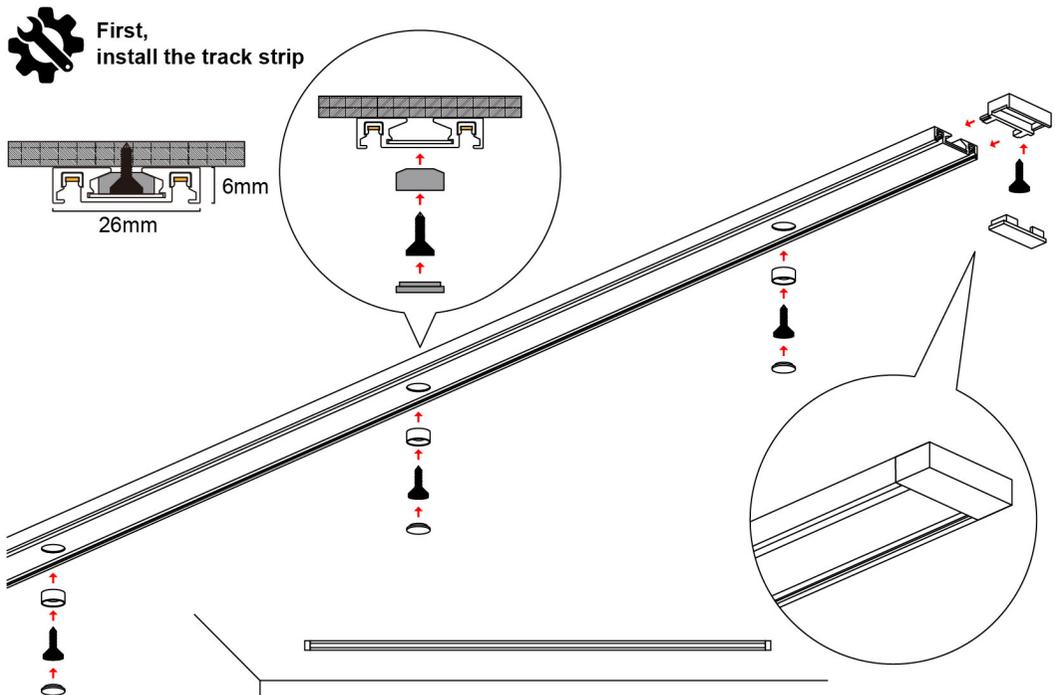


1. Check the fittings: Ultra-thin track strip + Positioning plug + Screws + Screw hole cover
2. According to the planned decoration plan, the track bar installed to the ceiling, the "Positioning plug" installed into the track bar hole, screw, installed "Cover" hidden screw hole;
3. The rail bar has 3 holes in each meter, which are screwed until the whole rail bar is fixed to the ceiling;
4. Finally, the end of the track bar to install plug, screw, plug cover installed, at this time the track bar installation is completed.


**Two, Track SPLICING**

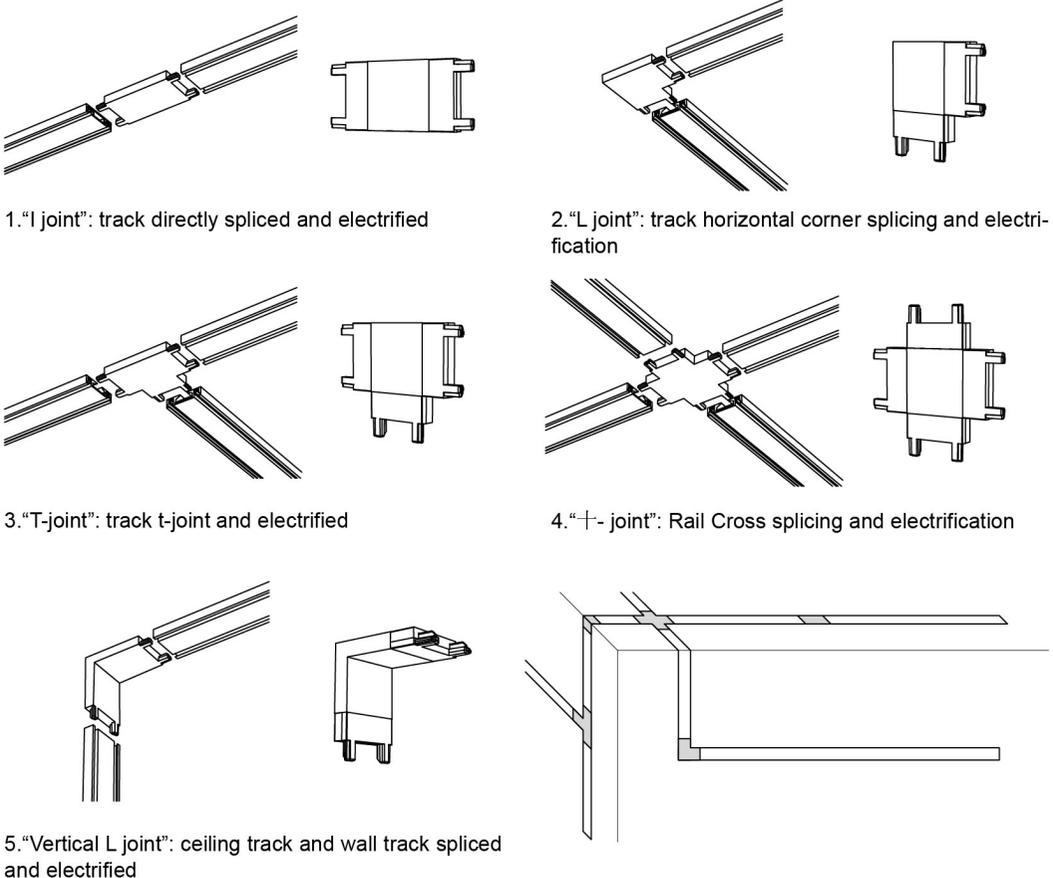


**Three, Power input**

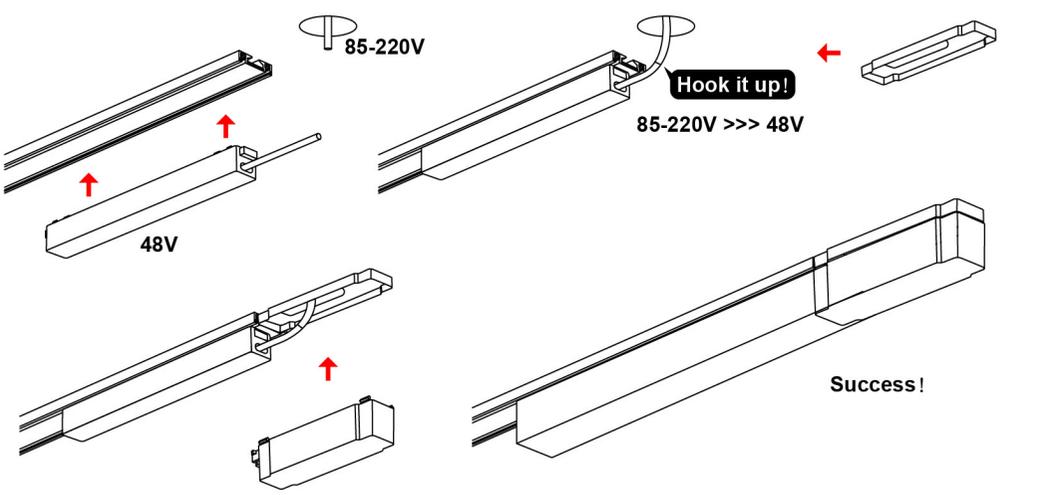

## Ultra-thin clear track-installation procedure

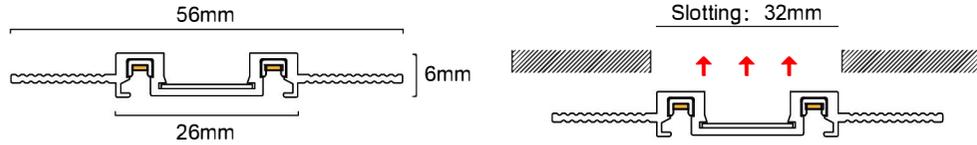





1. According to the section size of the track and the required shape, make the corresponding width of the wood-working plate groove in the ceiling (the strength of the groove body to withstand the weight of the track and lamps, the height of the groove body should be guaranteed in the loading track)

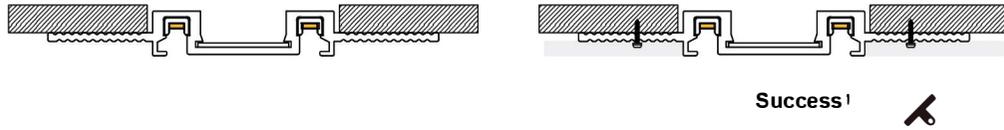

2. Adjust the rail bar clamp plate, use the self-tapping screw to fix,

3. Check and confirm the wiring is correct, test-install the lamps to ensure that all tracks work properly, and then the outside batch of lime, paint is completed

### Energizing module with power input



Linear electrifying module

Corner energizing module

Power take module

Integrated Power Supply

