

DimSlim T5 - SlimLite T5 - DecoLite T4

dimming

switching


switching



P L U G ' N ' P L A Y

SMALLER - COOLER - BRIGHTER

ET LUMIERE

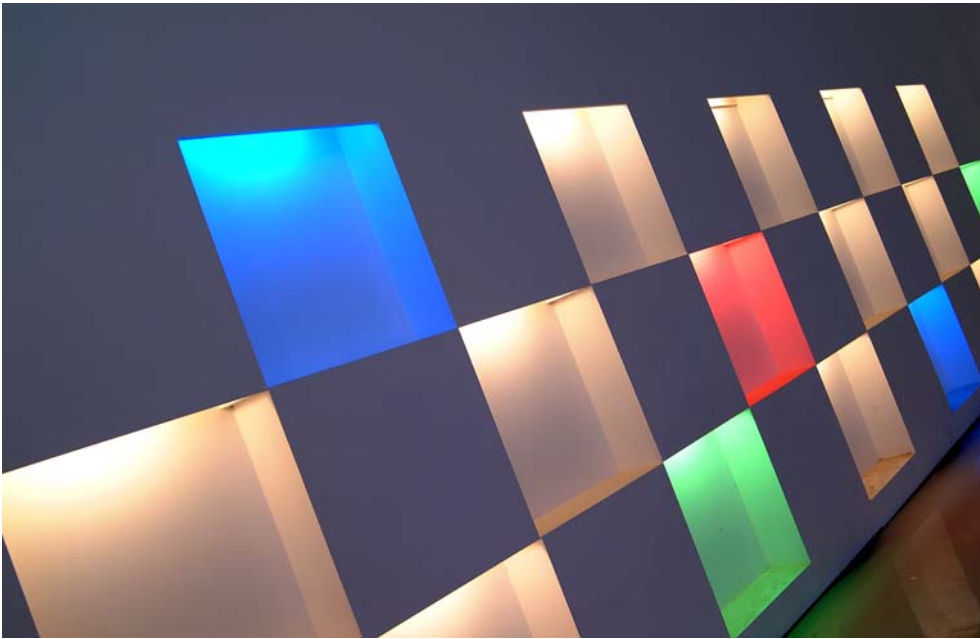



dimming

DimSlim T5 3-4



switching


SlimLite T5 5-6



switching

DecoLite T4 7-8



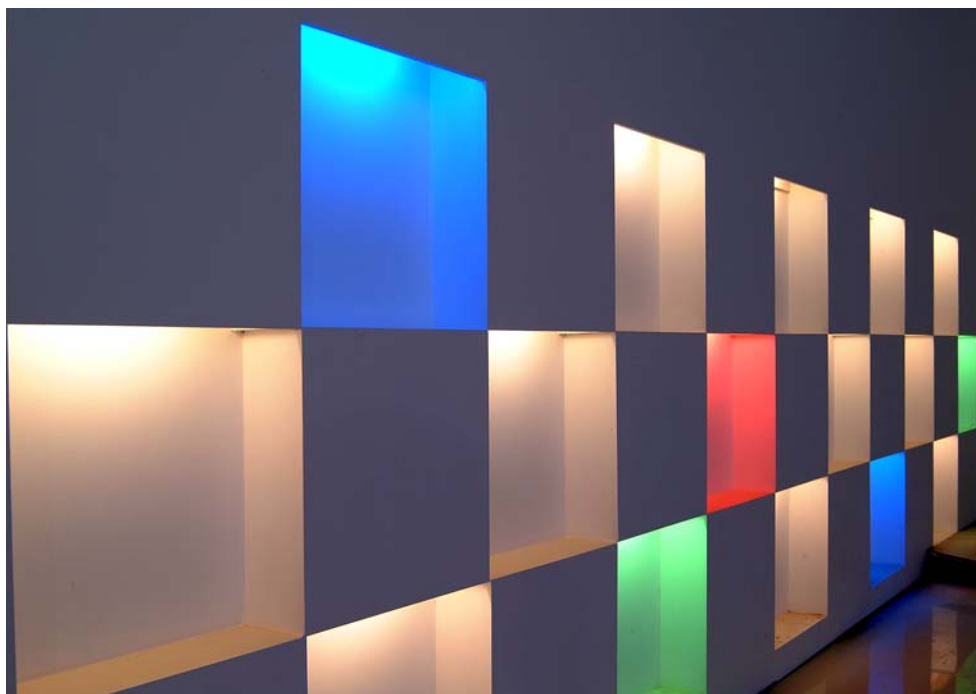

DimSlim T5

dimming

Revolutionising DimSlim Technology - The world's smallest integral dimmable fluorescent fitting

The DimSlim is a new range of dimmable T5 fittings. There are three main controllers that can be used with the DimSlim. The DCS12 has simple up/down push control. The TCS1 has 14 different light levels. The TCS2 has 7 different light levels and by using two lines it is also possible to achieve 7 different colour temperatures. A simple user friendly remote control(IR) can be used in conjunction with the TCS1 or TCS2 dimmers.

DimSlim PWM Interface (Dali/DSI/DMX)




The DimSlim PWM Interface has the Dali, DSI and DMX input protocols. This means that you can dim the DimSlim with the following control systems, Lutron, Cbus, Leax, I-Light, Crestron, Rako, Helvar, Dynalite etc. The maximum load per channel (4 channels in total) is 1750 watts, but the total load on the Interface must not exceed 3500 watts.

Product Features

- Built-in dimmable electronic ballast
- Energy efficient, only 14W - 1350 initial lumens 21W - 2100 initial lumens, 28W - 2900 initial lumens 35W - 3650 initial lumens,
- Uses a standard T5 lamp, 82 CRI
- Plug-in modular system permits easy connection for continuous lighting
- Extremely long lamp life, rated at 16000 hours
- Optional diffuser cover available
- Contemporary white casing
- Stable light
- Very quiet

Energy Comparison		Max. No. of Units Inline	
Fluorescent Output	Incandescent Equivalents	Part No.	Maximum Units
14 Watts	75 Watts	SL14	10 Units
21 Watts	100 Watts	SL21	10 Units
28 Watts	150 Watts	SL28	10 Units
35 Watts	200 Watts	SL35	10 Units



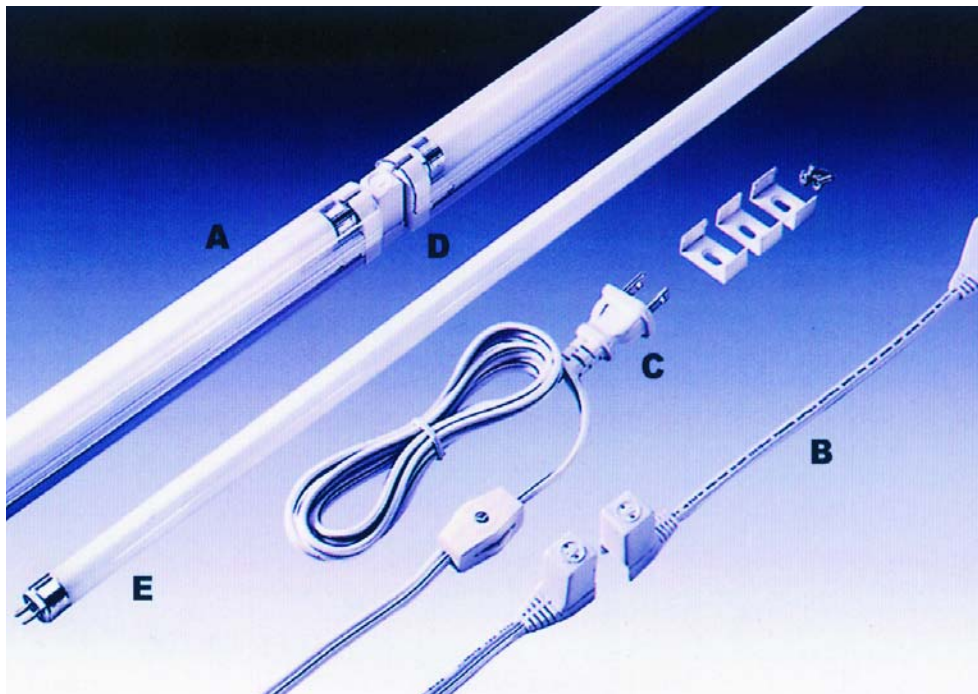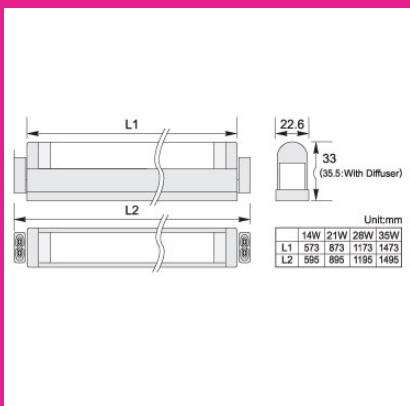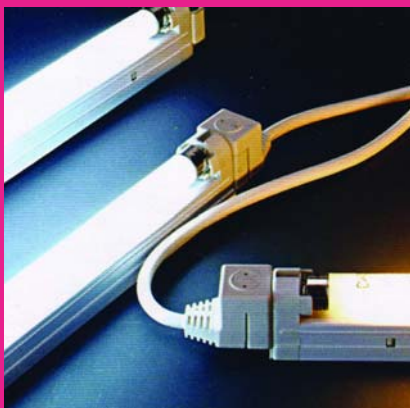

dimming

DimSlim T5

DimSlim Part No.

- A**
- DSL14A424 COOL** 595mm 14W - including cool white lamp
DSL14AB24 NO TUBE 595mm 14W - lamp not included
- DSL21A424 COOL** 895mm 21W - including cool white lamp
DSL21AB24 NO TUBE 895mm 21W - lamp not included
- DSL28A424 COOL** 1195mm 28W - including cool white lamp
DSL28AB24 NO TUBE 1195mm 28W - lamp not included
- DSL35A424 COOL** 1495mm 35W - including cool white lamp
DSL35AB24 NO TUBE 1495mm 35W - lamp not included

Controllers

- DCS12** DimSlim dimmer controller, change brightness levels
TCS1 DimSlim dimmer controller, change brightness levels
TCS2 DimSlim dimmer controller, change brightness levels / colour temperature
DTOPWM01 Dimm Dali Interface

Accessories

- B**
- Coupler Lead**
 DSLPTC/T 150mm
 DSLPTC1/T 300mm
 DSLPTC2/T 600mm
 DSLPTC4/T 1200mm
 DSLPTC6/T 1800mm
- C**
- Power Lead**
 DSLOPC240/T 35mm connector with 1800mm lead
 DSLOPC1/T 35mm connector with 300mm lead
- D**
- Direct Coupler**
 DSLCAP/T 22mm
- E**
- Lamps**
 FL14T5 INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE
 FL21T5 INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K)
 FL28T5 INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE
 FL35T5 INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE
 also, coloured sleeves are available in all sizes

Diffuser
 DSL14CV, DSL21CV, DSL28CV, DSL35CV



SlimLite T5

switching

Introducing SlimLite series, an innovative new lighting solution for displays, cabinet and retail store fixtures from Et-Lumiere

The SlimLite series are perfectly suited for display and retail store fixture applications since its compact size fits even the narrowest space, providing excellent fluorescent light as well as a great appearance.


The SlimLite series and its integrated connecting system saves valuable installation time while providing continuous lines of light. It features a built-in electronic ballast and standard T5 lamps that are available in a variety of light colours.


The SlimLite series is particularly appealing in applications where heat sensitivity is an issue. Products can be beautifully displayed without damage from high heat levels. Its optional plexiglass cover also makes it the preferred light fixture for food applications.

Product Features


- Built-in electronic ballast
- Energy efficient, only
 - 8W - 650 initial lumens,
 - 14W - 1350 initial lumens,
 - 21W - 2100 initial lumens,
 - 28W - 2900 initial lumens,
 - 35W - 3650 initial lumens,
- Uses a standard T5 lamp, 82 CRI
- Plug-in modular system permits easy connection for continuous lighting
- Extremely long lamp life, rated at 16000 hours
- Optional plexiglass cover available
- Contemporary white casing

Energy Comparison		Max. No. of Units Inline	
Fluorescent Output	Incandescent Equivalents	Part No.	Maximum Units
8 Watts	50 Watts	SL8	33 Units
14 Watts	75 Watts	SL14	19 Units
21 Watts	100 Watts	SL21	12 Units
28 Watts	150 Watts	SL28	9 Units
35 Watts	200 Watts	SL35	7 Units

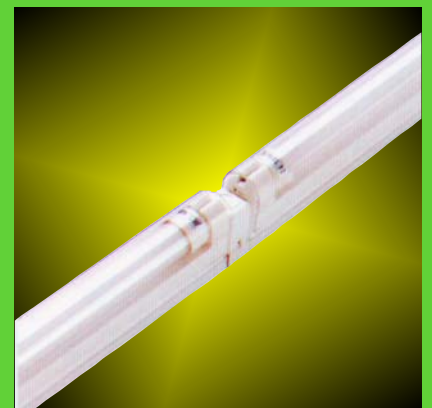

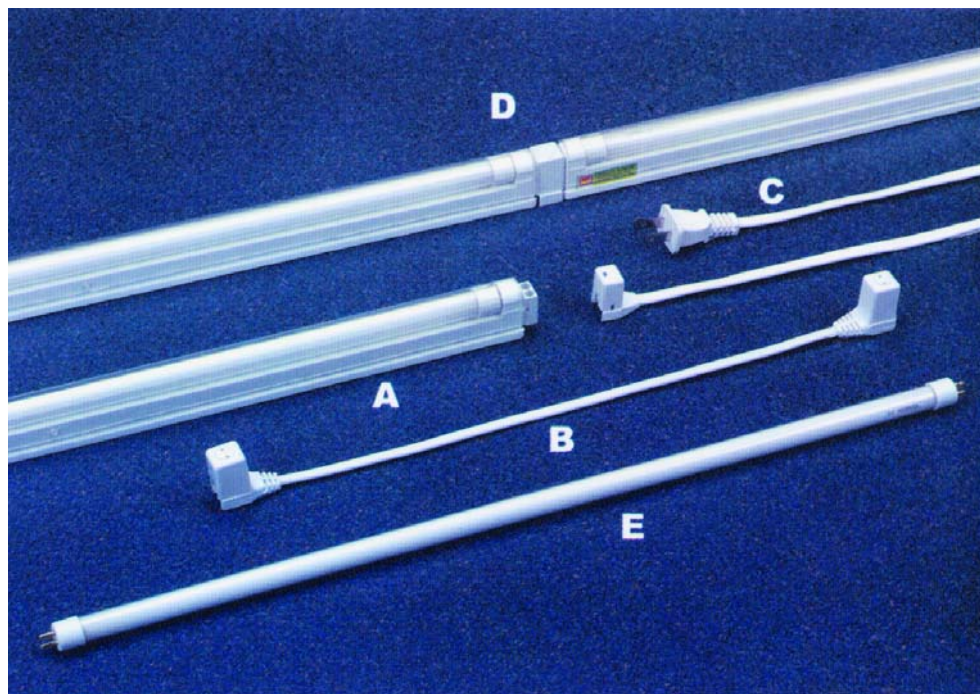

Technical Specifications

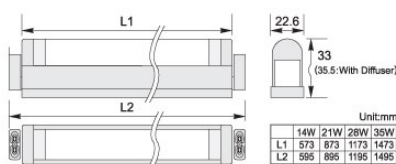

switching

SlimLite T5

SlimLite Part No.

A	SL8A424 COOL	345mm 8W - including cool white lamp
	SL8A324 WARM	345mm 8W - including warm white lamp
	SL8AB24 NO TUBE	345mm 8W - lamp not included
	SL14A424 COOL	595mm 14W - including cool white lamp
	SL14A324 WARM	595mm 14W - including warm white lamp
	SL14AB24 NO TUBE	595mm 14W - lamp not included
	SL21A424 COOL	895mm 21W - including cool white lamp
	SL21A324 WARM	895mm 21W - including warm white lamp
	SL21AB24 NO TUBE	895mm 21W - lamp not included
	SL28A424 COOL	1195mm 28W - including cool white lamp
	SL28A324 WARM	1195mm 28W - including warm white lamp
	SL28AB24 NO TUBE	1195mm 28W - lamp not included
	SL35A424 COOL	1495mm 35W - including cool white lamp
	SL35A324 WARM	1495mm 35W - including warm white lamp
	SL35AB24 NO TUBE	1495mm 35W - lamp not included

Accessories

B	Coupler Lead		Vertical Coupler Lead	
	SLPTC/T	150mm	SLPTC/SM2/T	150mm (vertical coupler)
	SLPTC1/T	300mm	SLPTC1/SM2/T	300mm (vertical coupler)
	SLPTC2/T	600mm	SLPTC2/SM2/T	600mm (vertical coupler)
	SLPTC4/T	1200mm	SLPTC4/SM2/T	1200mm (vertical coupler)
	SLPTC6/T	1800mm	SLPTC6/SM2/T	1800mm (vertical coupler)

C	Power Lead	
	SLPC240/T	35mm connector with 1800mm lead (plug -2 pin)
	SLOPC240/T	35mm connector with 1800mm lead (no plug)
	SLOPC240/SM2/T	Connector with 1800mm lead (no plug, vertical lead)

D	Direct Coupler	
	SLCPL/T	22mm

E	Lamps	
	FL8T5	INTERNA(2700K), WARM(3000K), COOL(4000K), BLACKLIGHT BLUE(ENHANCE WHITE)
	FL14T5	INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE
	FL21T5	INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K)
	FL28T5	INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE
	FL35T5	INTERNA(2700K), WARM(3000K), COOL(4000K), DAYLIGHT(6000K), RED, GREEN, BLUE also, coloured sleeves are available in all sizes

F	Switch	
	SLSB/T	Rocker switch

Diffuser	
SL8CV, SL14CV, SL21CV, SL28CV, SL35CV	



DecoLite T4

switching

A fluorescent so compact it fits in the most hard-to-light areas in furniture, displays or under cabinets.

The fixture is easy to install with a plug 'n' play system. You can also combine several fixtures effortlessly. The modular connecting system makes it simple to create long, continuous lines of fluorescent lighting to fit any space. Its high light-output and an extremely low heat make the DecoLite ideal for displays and cases.


- More light
- Less Heat
- Easier installation
- More Flexibility

Product Features

- Built-in electronic ballast
- Energy efficient, only 7, 10 and 18 Watt
- Slender profile fits virtually any furniture, cabinet or display
- Attractive, easy-to-clean plexiglass cover protects bulb
- Instant starting, Tri Phosphor lamp is quiet and flicker-free
- Plug-in modular system permits easy connection for continuous lighting
- Extremely long bulb life, rated 10000 hours
- Contemporary white housing
- Available in three different lengths:
254mm, 330mm and 508mm.



Energy Comparison		Max. No. of Units Inline	
Fluorescent Output	Incandescent Equivalents	Part No.	Maximum Units
7 Watts	40 Watts	DL07	22 Units
10 Watts	60 Watts	DL10	15 Units
18 Watts	100 Watts	DL18	8 Units

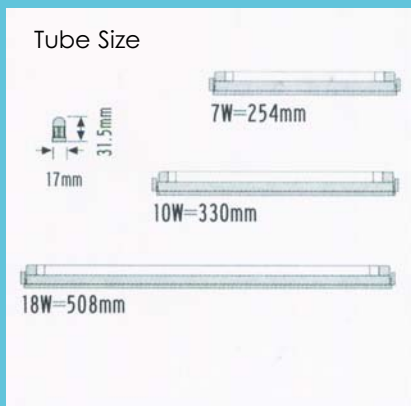





NEW HighSlim

T5 HIGH POWER

New from Et-Lumiere

The HighSlim T5 High Power series is the latest addition in our popular slim fluorescent range.


It's length, integrated connecting system and built-in electronic ballast saves valuable installation time, while providing continuous lines of light.

Suitable for unlimited applications in kitchens, cabinet displays, under cupboard lighting and shop lighting.

Available in Warm 3000K and Cool 4000K

Another great lighting solution from Et-Lumiere

Available NOW!

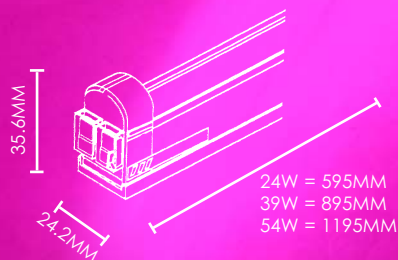

HighSlim T5
HP54A424

HighSlim T5
HP39A424

HighSlim T5
HP24A424

ET LUMIERE

Showroom, Sales, Offices & Warehouse
21 Lydden Road, London SW18 4LT
Telephone: 020 8874 2234 Fax: 020 8871 2262

www.mr-resistor.co.uk
info@mr-resistor.co.uk