



- Backlight of transparent panels
- Supported panel thicknesses: 5-6 mm - 0.2-0.24"

APPLICATION

- decorative edge illumination for transparent panels


MOUNTING

- to the edge of the panel, using dedicated double-sided adhesive tape

ADDITIONAL INFORMATION

- the extrusion has a decorative function, it is not a construction extrusion
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ


TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

| | | | |
|-------------------------|-------------------|--------------------------------------|---|
| Material | aluminum | Width of the glow | 5 mm |
| Color | ■ silver anodized | Max power of a single KLUŚ LED strip | 2.9 W/ft |
| Possible fixture IP | 20 | Building type | Entertainment/ Arts, Retail, Hotel / Restaurant |
| Possible fixture shapes | linear | Facility zone | furniture, shop windows and exhibition, advertising / POS |
| Profile cross-section | rectangular | Wire out back of extrusion | yes |
| Length | 78.9" | | |
| Width | 0.4" | | |
| Height | 1" | | |
| LED gluing width A | 0.3" | | |

SAMPLE PROJECTS

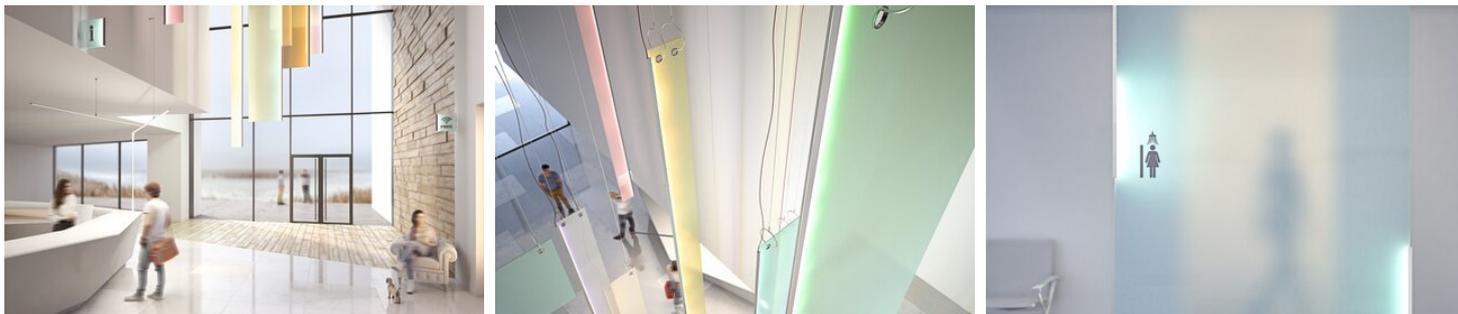

RELATED ACCESSORIES > END CAPS

| NAME | MATERIAL | COLOR | REF. |
|-----------------|----------|-------|-----------|
| End cap KRAV-56 | PP | gray | C28001C02 |

RELATED ACCESSORIES > RELATED LED > CRI 90+




K-1091-24
K-1091-24



K-SHD-0960-24
K-SHD-0960-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-RGB-1560-24
K-RGB-1560-24

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



UNI-11
E61603