

# RAH07-Hand Held Remote

## 7 Button Hand Held Scene Sender



### What is it?

The RAH07 is a compact hand held 7 button scene sender providing 4 preset scenes plus off and master raise/lower controls as well as having full scene programming capability.

The RAH07 communicates with other Rako devices, such as the RD range of dimmer modules, using coded FM radio data transmission, ensuring reliable interference free operation.

Since the remote control uses Rako coded radio transmission, it does not require line of site with receivers/dimmers to operate.

### Key Features

4 preset scene selection and off plus master raise/lower

Can be used in conjunction with Rako's RCP range of wall mounted control panels

256 house/256 room addresses

15 channel/circuit control (Up to 60 channels accessible using Rasoft software)

Nonvolatile memory storage

Smooth crossfading between scenes

Simple system configuration can be performed by non technical staff

House, room and channel addresses can be set without the need for a PC

Scene levels can be programmed from the hand held remote scene sender

Rako coded radio transmission means it does not require line of site with receivers/dimmers to operate

Sends scene instructions using coded wireless FM radio communication with autorepeat and error correction

Transmitting range of 15m in building (100m free air)

Long battery life (in excess of 3 years), easily replaced by the user

Low battery warning by LED indication

Fully CE compliant



### The Benefits

Line of site with receiving devices is not required for operation

Can be used in conjunction with Rako's wall mounted control panels

An elegant compact design to suit all interiors

Hand held remote sends scene commands using FM communications

Configured using Rako's unique addressing system

Uses the Rako FM network allowing interfacing with audiovisual, security and other auxiliary systems

Many advanced user features accessible using Rasoft programming software

# RAH07-Hand Held Remote

## 7 Button Hand Held Scene Sender

### Electrical Data

Supply: 6V(2x3VLithiumcoincellsCR2016)

BatteryLife: Greaterthan3years

Standards: EMC-EN5001-1 :1992  
Immunity-EN50082-1:1997


Data  
Transmission: RakocodedFMradio

Memory: Flashmemory

### The Range

**RAH07** 7 button handheldremotecontrollerfinished ingreywith black buttons.

### Dimensions

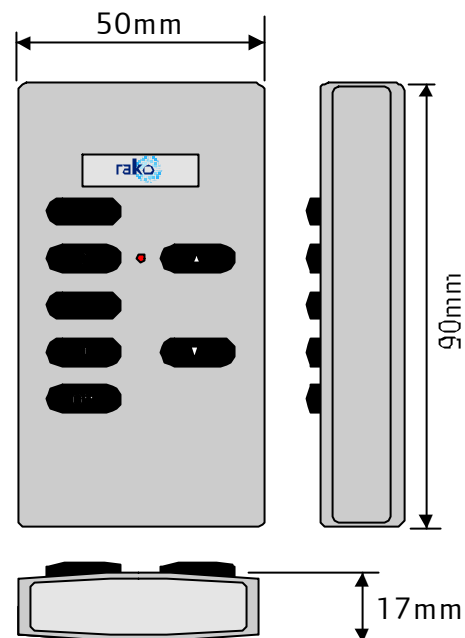

### Mechanical Data

Weight: 60g

Climate range: Temperature +2to+40°C  
Humidity5to90%non condensing

Fixing: Hand Held

©2003RakoControlsLimited

Wereservetherighttochangethespecificationanddataherewith withoutnotice.

Your Dealeris

