

SceneStyLED

Self Contained Dimmer



 SceneStyLED

Key Features

- » Four circuits of trailing edge dimming, (2 x 500) watts, 2 x 250 watts, total unit load 1000 watts tungsten or 500 watts LED (max).
- » Four programmable scenes plus On/Off and Raise/Lower of any Scene or Circuit.
- » Programmable fade rate from scene to scene.
- » Fits into UK double-gang sized back box (47mm).
- » Stylish screwless fascias available in White, Brushed Stainless Steel, Brass and Chrome.
- » Indicator buttons available in Black or White to complement Fascias.
- » Indicator LEDs with seven user selectable colours.
- » Multi-Way switching and remote input control.
- » Optional Infrared control available.
- » Two year warranty.


SceneStyle4 from Mode is the stylish way to control your lighting. Self-contained, it connects to your existing wiring without fuss and can control up to four independent circuits of lighting. It can quickly and easily be programmed by the user to store any combination of four moods or “scenes”, as well as on and off.

By selecting the different scenes, areas of your home can have completely different lighting atmospheres to suit your use of the space. So you can turn your living room into a home cinema, the day room into a quiet snug and the conservatory into a dining room, all at the touch of a button. You can also select “full on” for cleaning or manually increase or decrease the brightness of an individual scene or circuit. Each scene can be any combination of the four lighting circuits at any brightness level from a soft glow to a bright illumination. Even the time taken to “fade” between each different mood is programmable.

For example, in a kitchen-diner, there may be low voltage recessed down-lights in the ceiling, mains voltage wall lights, low voltage task lights under the wall cabinets and a pendant light over the dining table. By simply pressing a button, you can choose to alter the lighting levels to suit “food preparation”, a “family meal”, a quiet “romantic dinner” or a vibrant “party” mode.




Technical

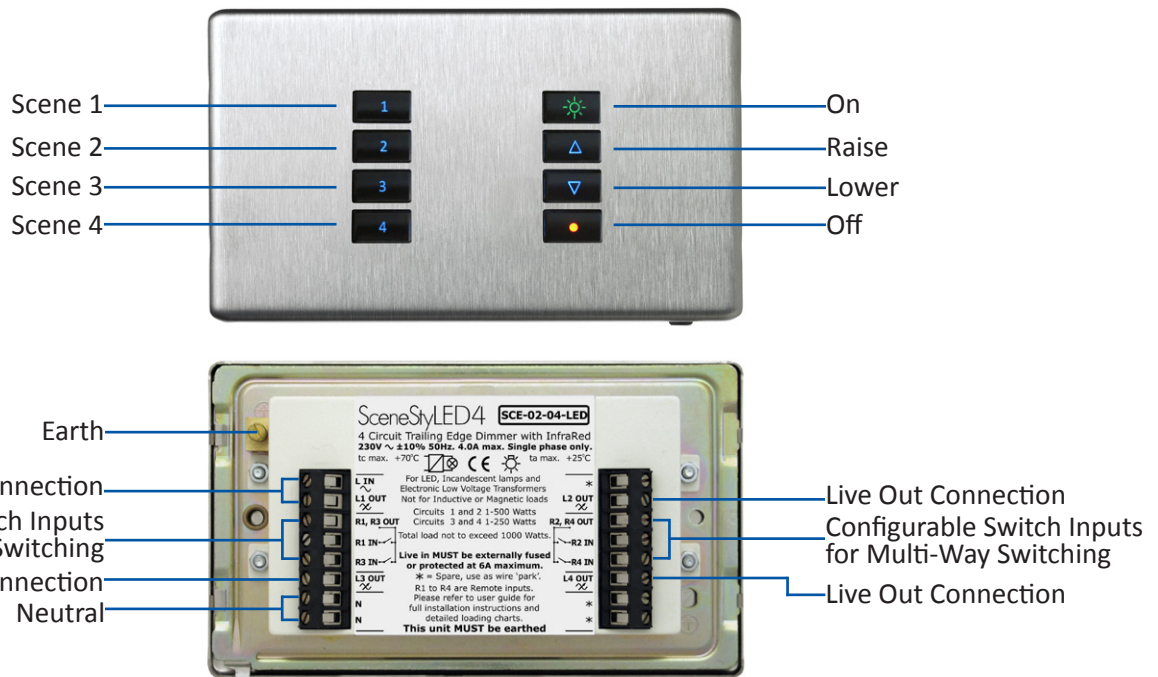

Technical Data

Power	
Power Supply	» 2 x 500 watts, 2 x 250 watts, (1000 watts maximum).
Connections & Cable Specifications	
Connections	» Live In, Live out (4), Neutral.
Controls	» Eight buttons, optional infrared fascia.
Inputs	» Four mains rated switch inputs for multi-way switching.
Load Types	» LEDs, Mains Tungsten Halogen, GLS, GU10 and compatible LV electronic transformers.
Indicators	» Seven user selectable colours.
Mechanical	
Material	» Zinc plated steel and ABS plastic
Fascias Finishes*	» Brushed Stainless Steel » White » Polished Brass » Polished Chrome » Other finishes are available as a custom build
Button Finishes	» Black Buttons (SCE-02-04-LED-BLK) » White Button (SCE-02-04-LED-WHI)
Dimensions	» 147mm Wide x 86mm High x 37mm Deep
Fixing	» Fits UK double-gang sized back box (47mm)
Standards	» Complies with EC, EMC and Low Voltage Directives (CE).

Plate Finishes Available

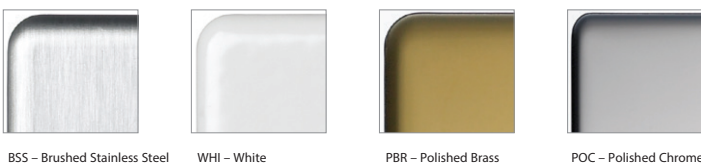

Mode Lighting Ltd. The Maltings, 63 High Street, Ware, Hertfordshire, SG12 9AD. United Kingdom.
 Tel: +44 (0) 1920 462121 | Fax: +44 (0) 1920 466881 | Email: sales@modellighting.com | www.modellighting.com