





MR. RESISTOR®
Lighting Specialist Est. 1968

TRIMLESS CONNECT DOWNLIGHTS

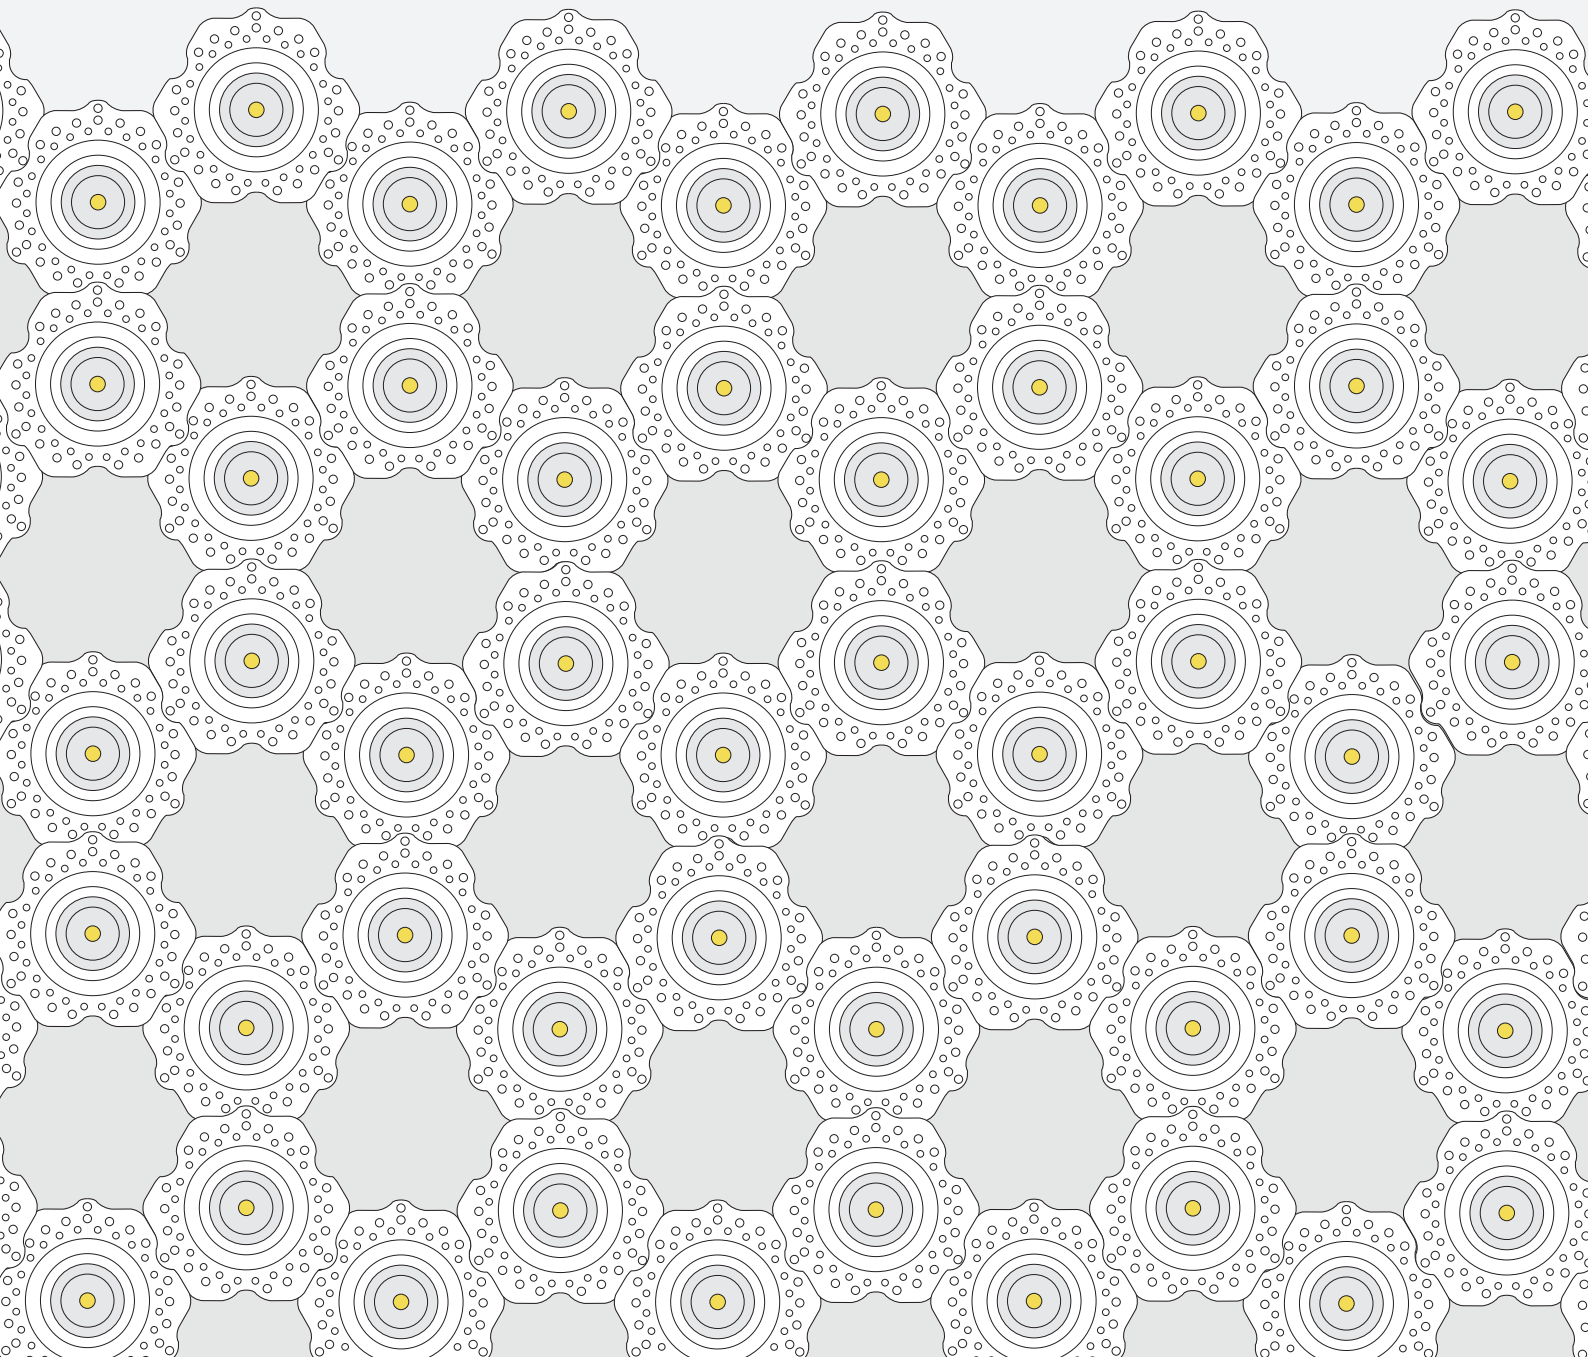

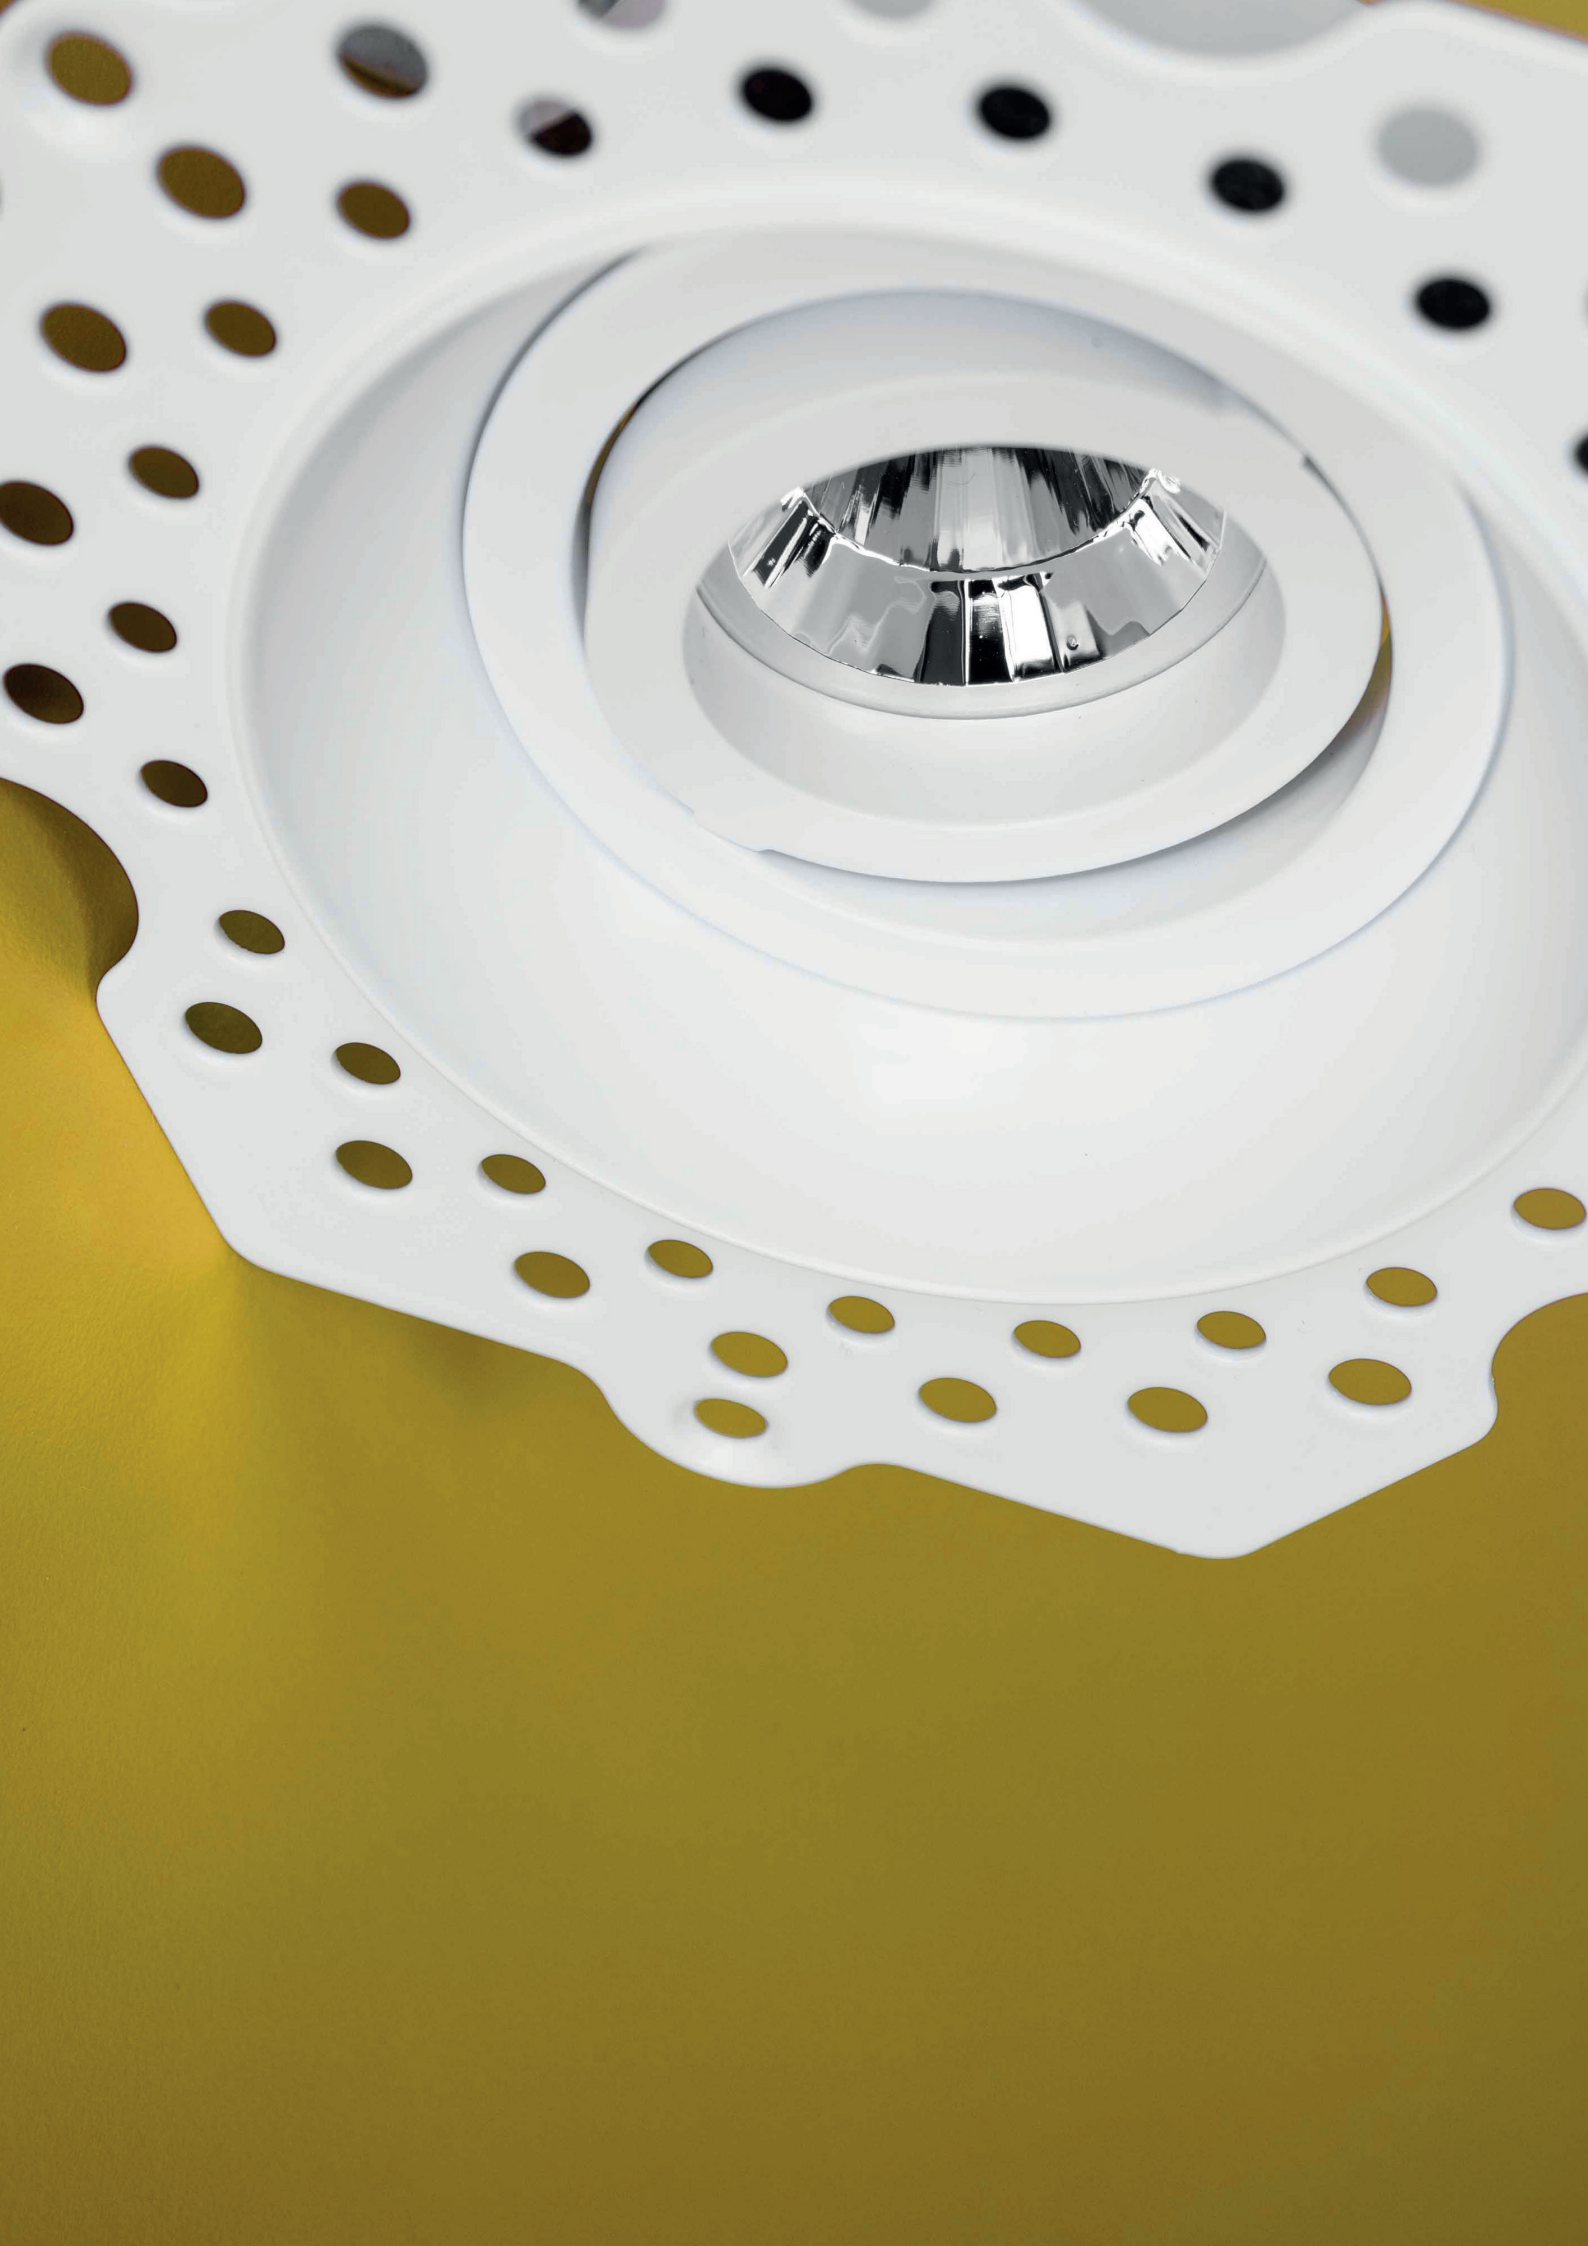



CONTENTS

Introduction	1
Trimless Connect Adjustable	5
Trimless Connect Adjustable Baffle	6
Trimless Connect Fixed Baffle	7
Trimless Connect Bathroom Rings	8
Trimless Connect Spotlights	9
LED Lamps	11
Pendant Adaptor	12
Installing Trimless Connect Downlights	13
Installing Trimless Connect Spotlights	15



TRIMLESS CONNECT DOWNLIGHTS

Open Can
Any lamp fits




Fire-Rated
Tested, 60 minutes


Metal Grid
Plaster to the edge for a
seamless look

Adjustable
The two rings rotate and tilt.
Curved edge allows larger
vertical tilt.

Curved Recess
for a softer look



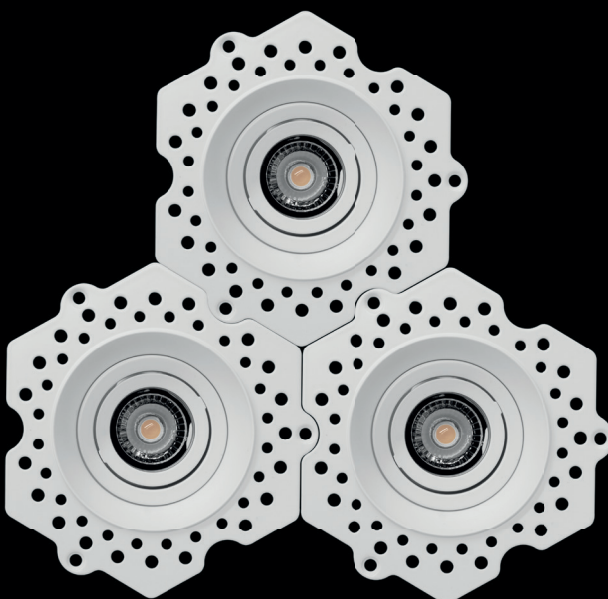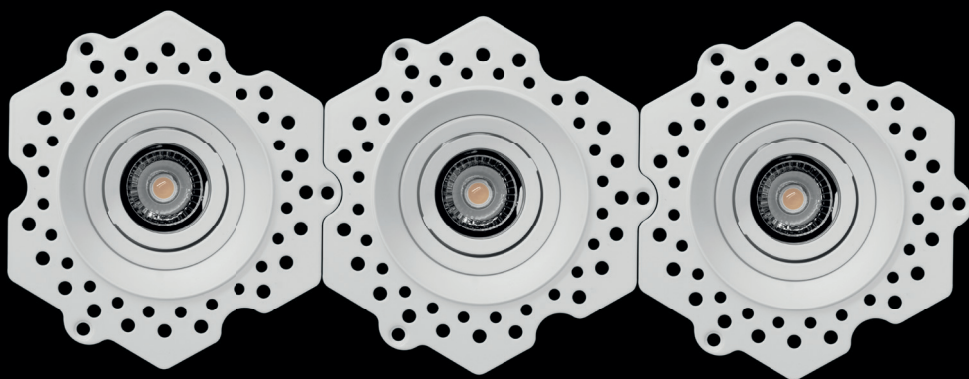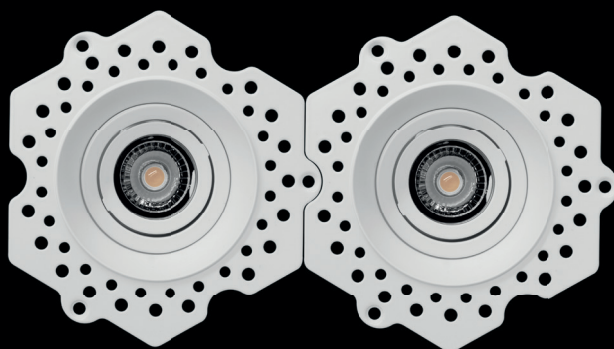

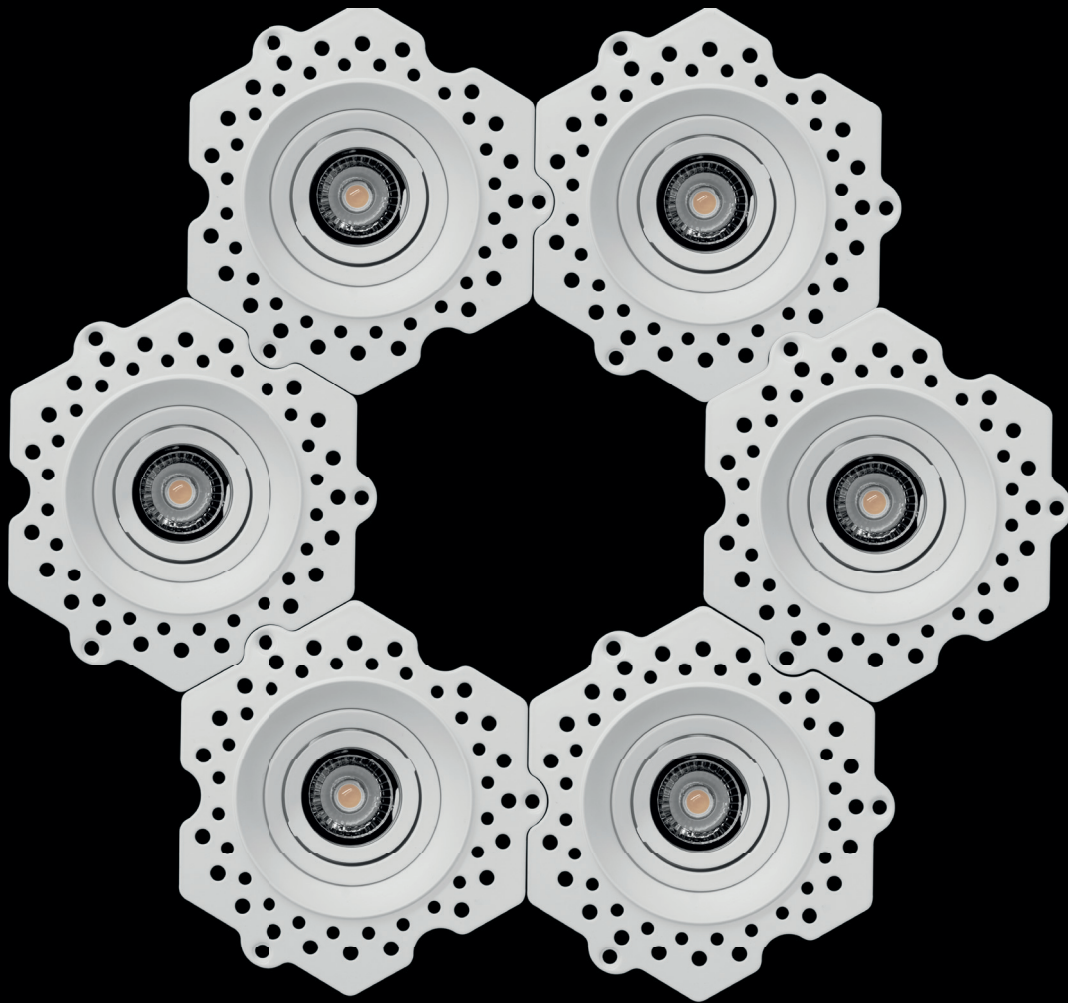

Trimless Connect Downlights have been designed with outer grids which connect together. This means you can create precise arrangements with the downlights easily.


From combining two fittings to create double downlights, to creating more complex designs.

TRIMLESS CONNECT ADJUSTABLE



Fire Rated Adjustable

Order Code	Colour	Lampholder	Voltage	Wattage	IP Rating	Fire Rated	Verical Tilt
TRIMCONNFRTD1	WHITE	GU10	240V	50W	IP20	Yes	40°
TRIMCONNFRTD4	BLACK	GU10	240V	50W	IP20	Yes	40°


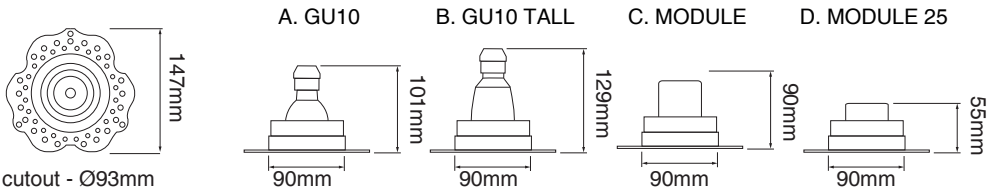


TRIMLESS CONNECT ADJUSTABLE BAFFLE



Fire Rated Adjustable

Order Code	Colour	Lampholder	Voltage	Wattage	IP Rating	Fire Rated	Verical Tilt
TRIMCONNFRTD14	WHITE	GU10	240V	50W	IP20	Yes	40°
TRIMCONNFRTD44	BLACK	GU10	240V	50W	IP20	Yes	40°

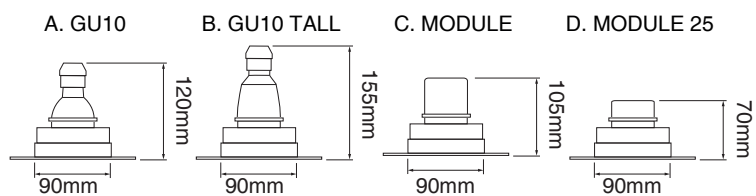



TRIMLESS CONNECT FIXED BAFFLE



Fire Rated Fixed

Order Code	Colour	Lampholder	Voltage	Wattage	IP Rating	Fire Rated	Verical Tilt
TRIMCONNFIXRD14	WHITE	GU10	240V	50W	IP20	Yes	-
TRIMCONNFIXRD44	BLACK	GU10	240V	50W	IP20	Yes	-

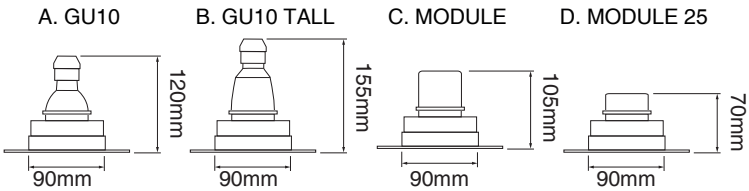

TRIMLESS CONNECT BATHROOM RINGS



To create bathroom suitable Trimless Connect fittings, simply order Trimless Connect downlights and Trimless Connect Conversion rings. Swap the existing downlight rings with the conversion downlight rings to create IP55 rated fittings. Available in white or black, clear or frosted.

Clear Bathroom Conversion Ring

Order Code	Colour	IP Rating
TRIMCONIP55/1CL	WHITE	IP55
TRIMCONIP55/4CL	BLACK	IP55

Frosted Bathroom Conversion Ring

Order Code	Colour	IP Rating
TRIMCONIP55/1FR	WHITE	IP55
TRIMCONIP55/4FR	BLACK	IP55


TRIMLESS CONNECT SPOTLIGHT



To create Trimless Connect Spotlight fittings, simply order Trimless Connect downlights and Trimless Connect Spotlights. To create the spotlights fittings, remove the downlight rings, connect the spotlights to the lampholder and fix into place. Adjust the spotlights to whatever angle required. Available in white or black.

Trimless Connect Spotlights

Order Code	Colour	Lampholder	Voltage	Wattage	Verical Tilt
TRIMCONTUBE1	WHITE	GU10	240V	50W	90°
TRIMCONTUBE4	BLACK	GU10	240V	50W	90°




TRIMLESS CONNECT SPOTLIGHT MINI



To create Trimless Connect Spotlight fittings, simply order Trimless Connect downlights and Trimless Connect Spotlights. To create the spotlights fittings, remove the downlight rings, connect the spotlights to the lampholder and fix into place. Adjust the spotlights to whatever angle required. Available in white or black.

Trimless Connect Spotlights

Order Code	Colour	Lampholder	Voltage	Wattage	Verical Tilt
FRT35TUBE1 9010W	WHITE	GU11	240V	35W	90°
FRT35TUBE4 9004	BLACK	GU11	240V	50W	90°



REALITY LED LAMPS



LED REALITY GU10 RETRO - 50mm

Order Code	Wattage	Colour Temp	Lumens	Beam angle	CRI	Lamp Holder	Dimmable
REAL RETRO5 I24D	5W	2700K	500	24°	80	GU10	Yes
REAL RETRO5 W24D	5W	3000K	500	24°	80	GU10	Yes
REAL RETRO5 I45D	5W	2700K	500	45°	80	GU10	Yes
REAL RETRO5 W45D	5W	3000K	500	45°	80	GU10	Yes



LED REALITY GU10 TALL - 50mm

Order Code	Wattage	Colour Temp	Lumens	Beam angle	CRI	Lamp Holder	Dimmable
REAL GU10D INT24	7W	2700K	630	24°	80	GU10	Yes
REAL GU10D 24D	7W	3000K	630	24°	80	GU10	Yes
REAL GU10D INT45	7W	2700K	630	45°	80	GU10	Yes
REAL GU10D 45D	7W	3000K	630	45°	80	GU10	Yes



LED REALITY MODULE - 50mm

Order Code	Wattage	Colour Temp	Lumens	Beam angle	CRI	Lamp Holder	Dimmable
REAL MODULE 24/I	10W	2700K	900	24°	80	-	Yes
REAL MODULE 24/W	10W	3000K	900	24°	80	-	Yes
REAL MODULE 45/I	10W	2700K	900	45°	80	-	Yes
REAL MODULE 45/W	10W	3000K	900	45°	80	-	Yes



LED REALITY MODULE 25 - 50mm

Order Code	Wattage	Colour Temp	Lumens	Beam angle	CRI	Lamp Holder	Dimmable
REAL 25MM 45/I	7W	2700K	650	45°	80	-	Yes
REAL 25MM 45/W	7W	3000K	650	45°	80	-	Yes



LED REALITY GU11 - 35mm

Order Code	Wattage	Colour Temp	Lumens	Beam angle	CRI	Lamp Holder	Dimmable
REAL GU11D IN35D	4W	2700K	280	35°	80	GU11	Yes
REAL GU11D WW35D	4W	3000K	280	35°	80	GU11	Yes
REAL GU11D CW35D	4W	4000K	280	35°	80	GU11	

GU10 PENDANT ADAPTOR




Order Code	Colour	Lampholder	Voltage
GU10 PENDANT ADP	WHITE	GU10	240V

INSTALLING TRIMLESS CONNECT DOWNLIGHTS




1.

cut hole in
ceiling

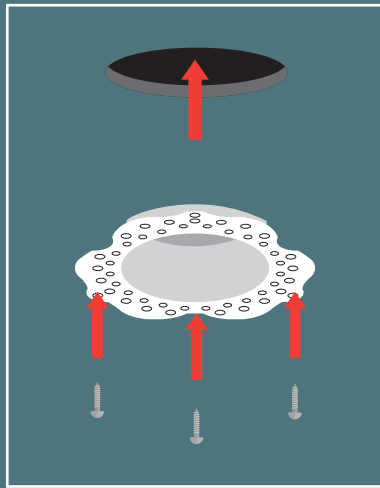


2.

wire & screw/
glue to ceiling

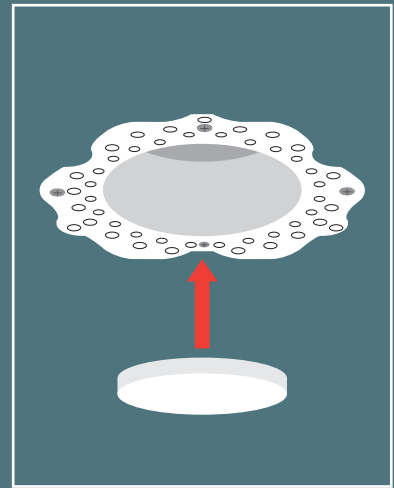


3.

Ensure plastic
protector is
fitted

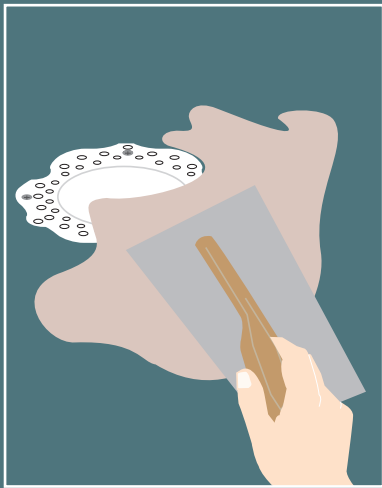


4.

plaster over
downlights

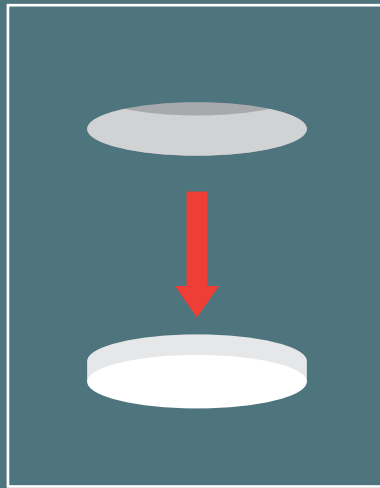

5.


remove
plastic
protector

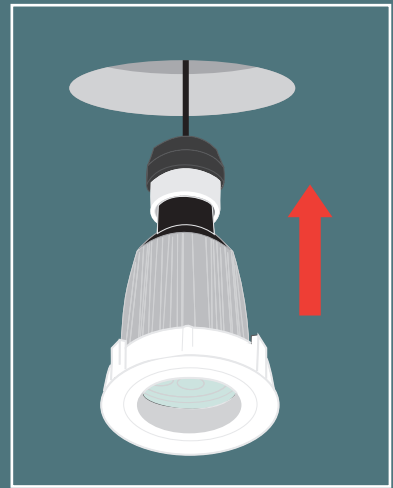

6.


install lamp
and twist in to
place to finish

INSTALLING TRIMLESS CONNECT SPOTLIGHTS

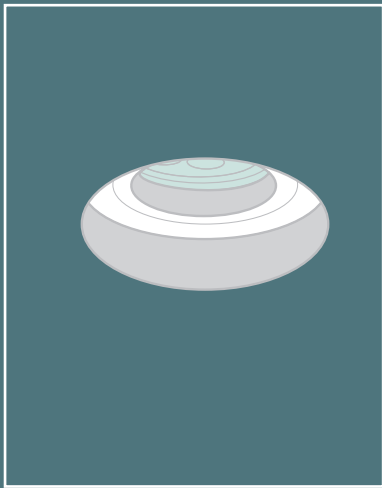


1.

install trimless
downlight if
not existing

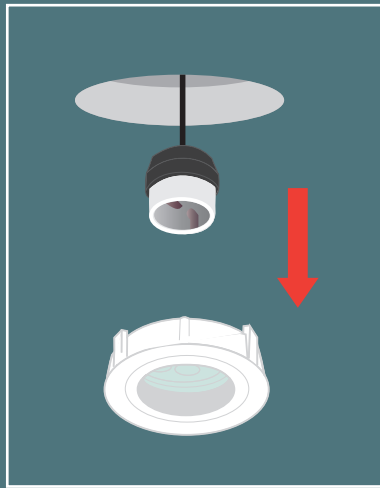


2.

twist and
remove
downlight ring

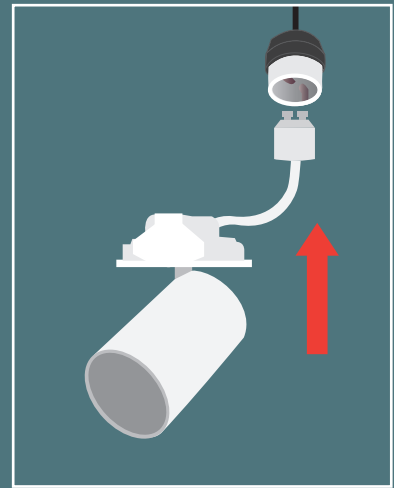


3.

attach
spotlight cap
to lampholder

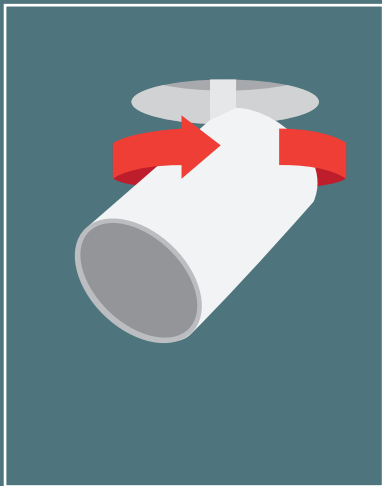

4.

push and twist
spotlight into
hole

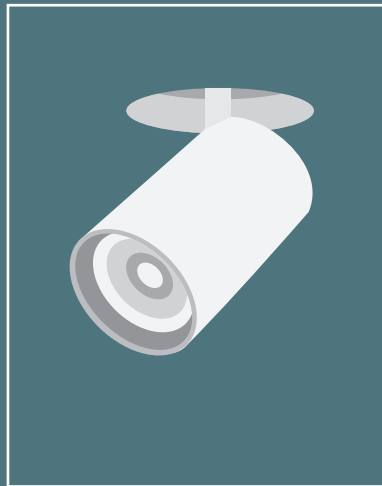


5.

install lamp



6.

adjust
spotlight into
position

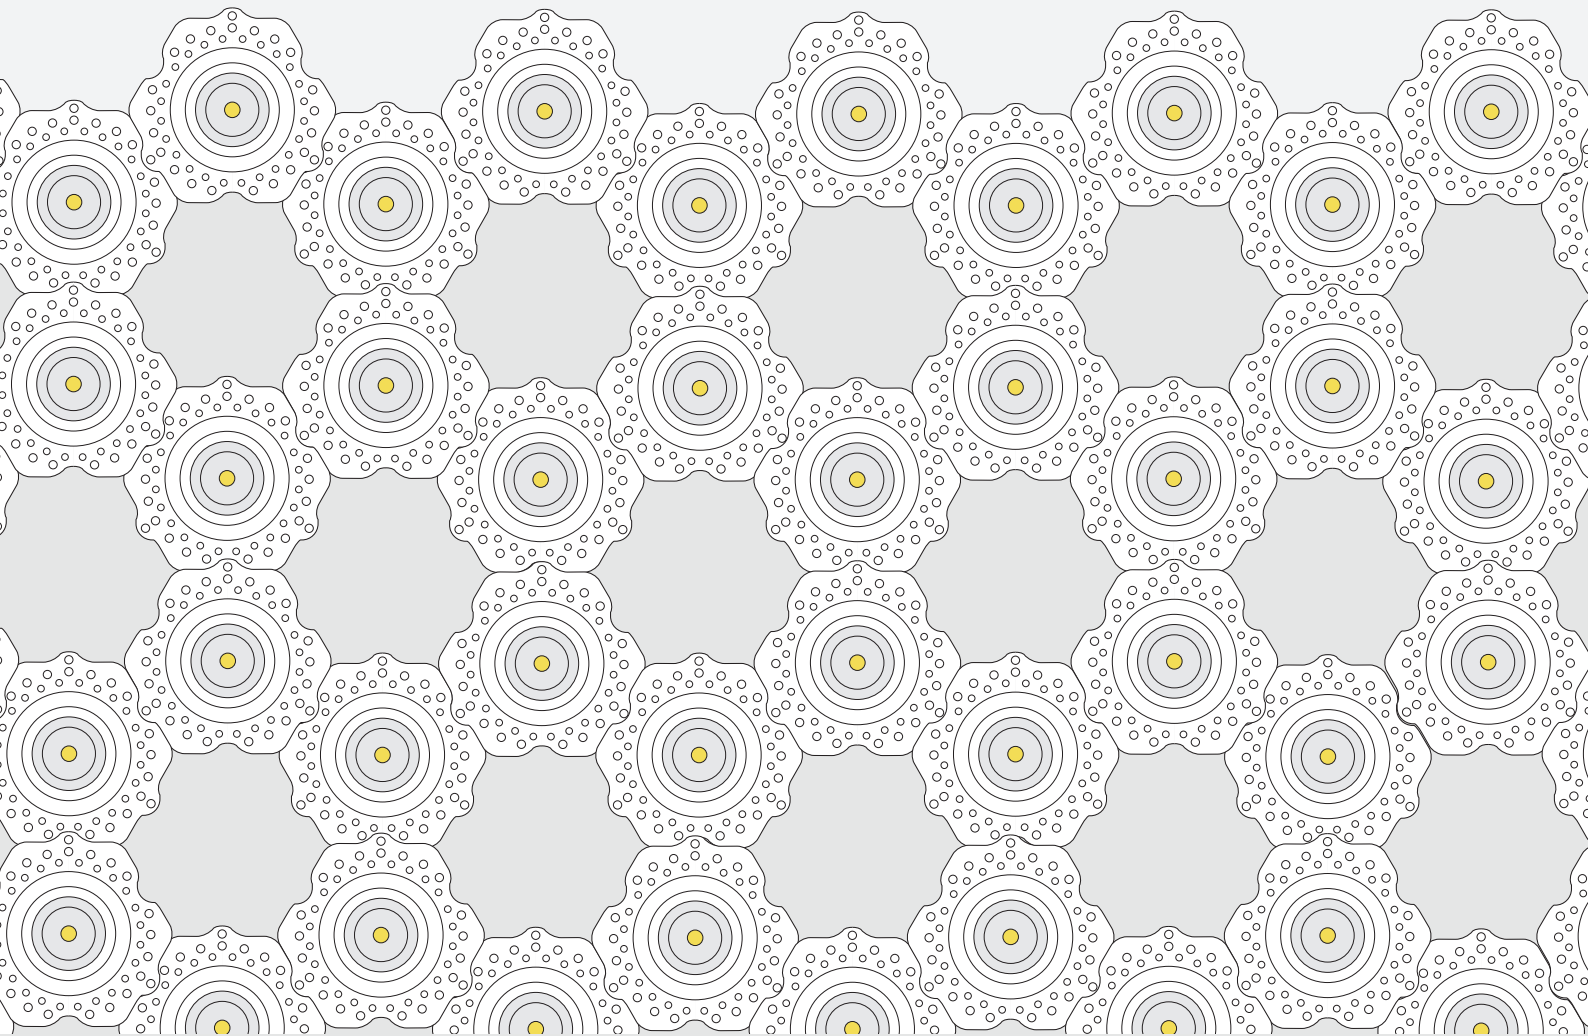

020 8874 2234 | info@mr-resistor.co.uk

19 - 23 Lydden Road, Wandsworth, London, SW18 4LT, United Kingdom

www.mr-resistor.co.uk

