



Innovative design for seamless illumination

Slimline is an exclusively designed lamp by Feelux. A dream come true for interior designers who utilize T5 fluorescent fixtures, the Slimline is the solution for seamless lighting. Featuring a linear lighting fixture casting a clean, continuous light without

dark spots, there are currently no other similar concepts in the current market.

By adapting to a HO ballast, the Slimline has twice the normal light output than previous T5 lamps.

Accessories




SLLPC230 powercord 1800mm with plug



SLLPC230/V vertical type powercord



SLLPC230/H horizontal type powercord

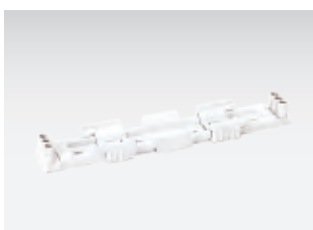

SLLCPL direct connecting cap



SLL-CAP protecting cap at the edge of fixture




SLLPTC connecting cable 150mm (6inch)
SLLPTC1 connecting cable 300mm (1feet)
SLLPTC2 connecting cable 600mm (2feet)
SLLPTC4 connecting cable 1200mm (4feet)
SLLPTC6 connecting cable 1800mm (6feet)



Available quantity of linkage in one line

SlimLine 28W/54W : 14/7units in-line



SlimLine 21W/39W : 19/10units in-line



SlimLine 14W/24W : 28/16units in-line






Benefits

- Dark point free at the linked site with the innovative design.
- Unique design concept to accommodate the newly-developed lamps.
- Protection from lamp End of Life(EOL), no load, overload, and cross wiring.
- Rigid aluminum extruded body and snap-in mounting brackets.
- Satisfy world class standard, CE certified.

Features

- Built in electronic ballast
- Instant on starting, quiet and flicker free
- Allows easy connectiong, saves installation time
- Protection from lamp End of Life(EOL), no overload, and coross wiring
- Rigid aluminum extruded body and snap-in mounting brackets

External Dimension

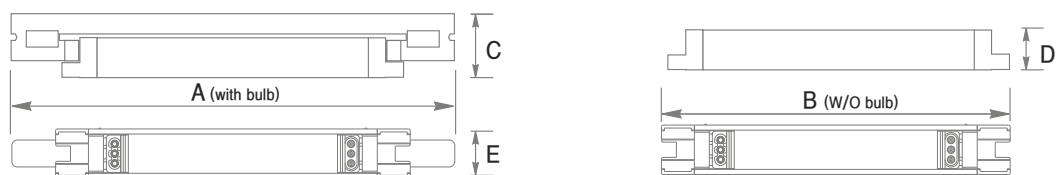

For all SlimLine

- 1) Frequency range : 50/60Hz
- 2) Voltage : 220~240V
- 3) Power factor : >97%
- 4) Color rendering : Ra>80
- 5) THD : <15%
- 6) EMI test : EN 55015
- 7) Class of protection II
- 8) Degree of protection IP20



Slimline consists of a high power built-in ballast and fluorescent bulb. It is an excellent lighting solution for a display shelf, cove lighting and under bar feature lighting.

Following bulbs are available upon request;
2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K

Dim SlimLine

- Performing Feelite system by PWM control
- Dimming range ; 5~100%
- Stable dimming status

SlimLine / DimSlimLine

	Model No.	Lamp power (watt)	Voltage
Non Dimmable (SlimLine)	SLL24AB23NN	24	220-240
	SLL39AB23NN	39	220-240
	SLL54AB23NN	54	220-240
	SLL14AB23NN	14	220-240
	SLL21AB23NN	21	220-240
	SLL28AB23NN	28	220-240
	SLL14AB12NN	14	110-130
	SLL21AB12NN	21	110-130
	SLL28AB12NN	28	110-130
Dimmable (DimSlimLine)	DSLL14AB23NN	14	220-240
	DSLL21AB23NN	21	220-240
	DSLL28AB23NN	28	220-240

A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
580	500	45	26.6	34
880	800	45	26.6	34
1180	1100	45	26.6	34

SlimLine 14W/24W fixture
/length 22 7/8 (580mm)



SlimLine 21W/39W fixture
/length 34 11/16 (880mm)



SlimLine 28W/54W fixture
/length 46 4/8inch (1180mm)

